



# TEST REPORT

**Reference No.** : WTX20X09067942W-1  
**Manufacturer** : Lumi United Technology Co., Ltd.  
**Address** : 8th Floor, JinQi Wisdom Valley, No.1 Tangling Road, Liuxian Ave, Taoyuan Residential District, Nanshan District, Shenzhen.China  
**Product** : Hub M2  
**Test Model** : HM2-G01  
**Standards** : ETSI EN 300 328 V2.2.2 (2019-07)  
**Date of Receipt sample** : Sept.18, 2020  
**Date of Test** : Sept.18, 2020 to Oct.27, 2020  
**Date of Issue** : Oct.27, 2020  
**Test Result** : Pass

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Jack Huang

Jack Huang / Project Engineer

Reviewed By:

Lion Cai

Lion Cai / RF Manager

Approved & Authorized By:

Silin Chen

Silin Chen / Manager



## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	8
1.3 TEST METHODOLOGY.....	8
1.4 TEST FACILITY .....	8
1.5 EUT SETUP AND TEST MODE.....	9
1.6 MEASUREMENT UNCERTAINTY .....	10
1.7 TEST EQUIPMENT LIST AND DETAILS .....	11
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>3. RF OUTPUT POWER .....</b>	<b>13</b>
3.1 STANDARD APPLICABLE.....	13
3.2 TEST PROCEDURE.....	13
3.3 SUMMARY OF TEST RESULTS .....	14
<b>4. POWER SPECTRAL DENSITY .....</b>	<b>23</b>
4.1 STANDARD APPLICABLE.....	23
4.2 TEST PROCEDURE.....	23
4.3 SUMMARY OF TEST RESULTS .....	24
<b>5. ADAPTIVITY .....</b>	<b>32</b>
5.1 STANDARD APPLICATION .....	32
5.2 TEST PROCEDURE .....	33
5.3 SUMMARY OF TEST RESULTS/PLOTS .....	33
<b>6. OCCUPIED CHANNEL BANDWIDTH.....</b>	<b>49</b>
6.1 STANDARD APPLICATION .....	49
6.2 TEST PROCEDURE .....	49
6.3 SUMMARY OF TEST RESULTS/PLOTS .....	49
<b>7. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN .....</b>	<b>57</b>
7.1 STANDARD APPLICATION .....	57
7.2 TEST PROCEDURE .....	57
7.3 SUMMARY OF TEST RESULTS/PLOTS .....	59
<b>8. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN .....</b>	<b>67</b>
8.1 STANDARD APPLICABLE.....	67
8.2 TEST PROCEDURE.....	67
8.3 SUMMARY OF TEST RESULTS/PLOTS .....	67
<b>9. RECEIVER SPURIOUS EMISSIONS .....</b>	<b>75</b>
9.1 STANDARD APPLICABLE.....	75
9.2 TEST PROCEDURE.....	75
9.3 SUMMARY OF TEST RESULTS/PLOTS .....	75
<b>10. RECEIVER BLOCKING .....</b>	<b>83</b>
10.1 STANDARD APPLICATION .....	83
10.2 TEST PROCEDURE.....	86
10.3 TEST SETUP .....	86
10.4 SUMMARY OF TEST RESULTS/PLOTS .....	87
<b>EXHIBIT 1 - EUT PHOTOGRAPHS.....</b>	<b>88</b>
<b>EXHIBIT 2 - TEST SETUP PHOTOGRAPHS .....</b>	<b>89</b>



## Report version

Version No.	Date of issue	Description
Rev.00	Oct.27, 2020	Original
/	/	/



# WALTEK



## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Manufacturer: Lumi United Technology Co., Ltd.  
 Address of manufacturer: 8th Floor, JinQi Wisdom Valley, No.1 Tangling Road, Liuxian Ave, Taoyuan Residential District, Nanshan District, Shenzhen.China

<b>General Description of EUT</b>	
Product Name:	Hub M2
Trade Name:	Aqara
Model No.:	HM2-G01
Adding Model(s):	/
Rated Voltage:	DC 5V, 1A Or DC 5V, 2A
Battery Capacity:	/
Power Adapter:	/
Software Version:	V1.1.0
Hardware Version:	3.0.6_0005.0515

*Note: The test data is gathered from a production sample, provided by the manufacturer.*

#### E.1 Product Information (Wi-Fi- Antenna A)

a) Type of modulation:	<input type="checkbox"/> FHSS <input checked="" type="checkbox"/> other forms of modulation
b) Adaptive / non-adaptive:	Adaptive equipment without a non-adaptive mode
c) In case of adaptive equipment:	The equipment has implemented an LBT based DAA mechanism
d) In case of non-adaptive equipment:	No
e) The worst case operational mode for each of the following tests	
RF output power:	802.11b
Power spectrum density:	802.11b
Occupied channel bandwidth:	802.11g
Transmitter unwanted emissions in the OOB domain:	802.11b
Transmitter unwanted emissions in the spurious domain:	802.11b
Receiver spurious emissions:	802.11b
f) Operating mode(antenna):	Double Antenna Equipment
g) In case of smart antenna Systems:	No
h) Operating frequency range(s) of the equipment:	2412-2472MHz for 802.11b/g



i) Occupied channel bandwidth(s):	Bandwidth 1(Min): 14.98MHz Bandwidth 2(Max): 16.72MHz
j) Type of equipment:	<input type="checkbox"/> Stand-alone <input checked="" type="checkbox"/> Combined equipment <input type="checkbox"/> Plug-in device
<b>k) The extreme operating conditions</b>	
Extreme voltage range:	Please refer to Section 1.5
Extreme temperature range:	Please refer to Section 1.5
<b>l) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels</b>	
Antenna type:	<input checked="" type="checkbox"/> PCB Antenna <input type="checkbox"/> Dedicated Antennas
Antenna gain:	2.0dBi
m) Nominal voltage:	Please refer to Section 1.5
n) Describe the test modes available which can facilitate testing:	Please refer to Section 1.5
o) The equipment type	Wi-Fi
<b>E.2 Power Level Setting</b>	
Highest EIRP value:	18.53dBm
Conducted power:	16.53dBm
Listed as power setting:	Default
<b>E.3 Additional Information</b>	
Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Unmodulated modes:	No
Duty cycle:	Continuous operation possible for testing purposes
Type of the UUT:	Production models
Supporting equipment provided:	Please refer to Section 1.5

<b>E.1 Product Information (Wi-Fi- Antenna B)</b>	
a) Type of modulation:	<input type="checkbox"/> FHSS <input checked="" type="checkbox"/> other forms of modulation
b) Adaptive / non-adaptive:	Adaptive equipment without a non-adaptive mode
c) In case of adaptive equipment:	The equipment has implemented an LBT based DAA mechanism
d) In case of non-adaptive equipment:	No
<b>e) The worst case operational mode for each of the following tests</b>	
RF output power:	802.11b
Power spectrum density:	802.11b
Occupied channel bandwidth:	802.11g
Transmitter unwanted emissions in the OOB domain:	802.11b
Transmitter unwanted emissions in the	802.11b



spurious domain:	
Receiver spurious emissions:	802.11b
<b>f)</b> Operating mode(antenna):	Double Antenna Equipment
<b>g)</b> In case of smart antenna Systems:	No
<b>h)</b> Operating frequency range(s) of the equipment:	2412-2472MHz for 802.11b/g
<b>i)</b> Occupied channel bandwidth(s):	Bandwidth 1(Min): 15.01MHz Bandwidth 2(Max): 16.73MHz
<b>j)</b> Type of equipment:	<input type="checkbox"/> Stand-alone <input checked="" type="checkbox"/> Combined equipment <input type="checkbox"/> Plug-in device
<b>k)</b> The extreme operating conditions	
Extreme voltage range:	Please refer to Section 1.5
Extreme temperature range:	Please refer to Section 1.5
<b>l)</b> The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels	
Antenna type:	<input checked="" type="checkbox"/> PCB Antenna <input type="checkbox"/> Dedicated Antennas
Antenna gain:	2.0dBi
<b>m)</b> Nominal voltage:	Please refer to Section 1.5
<b>n)</b> Describe the test modes available which can facilitate testing:	Please refer to Section 1.5
<b>o)</b> The equipment type	Wi-Fi
<b>E.2 Power Level Setting</b>	
Highest EIRP value:	18.42dBm
Conducted power:	16.42dBm
Listed as power setting:	Default
<b>E.3 Additional Information</b>	
Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Unmodulated modes:	No
Duty cycle:	Continuous operation possible for testing purposes
Type of the UUT:	Production models
Supporting equipment provided:	Please refer to Section 1.5

<b>E.1 Product Information (Wi-Fi- MIMO)</b>	
<b>a)</b> Type of modulation:	<input type="checkbox"/> FHSS <input checked="" type="checkbox"/> other forms of modulation
<b>b)</b> Adaptive / non-adaptive:	Adaptive equipment without a non-adaptive mode
<b>c)</b> In case of adaptive equipment:	The equipment has implemented an LBT based DAA mechanism
<b>d)</b> In case of non-adaptive equipment:	No
<b>e)</b> The worst case operational mode for each of the following tests	
RF output power:	802.11n HT20



Power spectrum density:	802.11n HT20
Occupied channel bandwidth:	802.11n HT40
Transmitter unwanted emissions in the OOB domain:	802.11n HT20
Transmitter unwanted emissions in the spurious domain:	802.11n HT20
Receiver spurious emissions:	802.11n HT20
<b>f)</b> Operating mode(antenna):	Double Antenna Equipment
<b>g)</b> In case of smart antenna Systems:	No
<b>h)</b> Operating frequency range(s) of the equipment:	2412-2472MHz for 802.11b/g/n(HT20) 2422-2462MHz for 802.11n(HT40)
<b>i)</b> Occupied channel bandwidth(s):	Bandwidth 1(Min): 17.53MHz Bandwidth 2(Max): 36.07MHz
<b>j)</b> Type of equipment:	<input type="checkbox"/> Stand-alone <input checked="" type="checkbox"/> Combined equipment <input type="checkbox"/> Plug-in device
<b>k)</b> The extreme operating conditions	
Extreme voltage range:	Please refer to Section 1.5
Extreme temperature range:	Please refer to Section 1.5
<b>l)</b> The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels	
Antenna type:	<input checked="" type="checkbox"/> PCB Antenna <input type="checkbox"/> Dedicated Antennas
Antenna gain:	2.0dBi
<b>m)</b> Nominal voltage:	Please refer to Section 1.5
<b>n)</b> Describe the test modes available which can facilitate testing:	Please refer to Section 1.5
<b>o)</b> The equipment type	Wi-Fi
<b>E.2 Power Level Setting</b>	
Highest EIRP value:	17.44dBm
Conducted power:	15.44dBm
Listed as power setting:	Default
<b>E.3 Additional Information</b>	
Modulation:	BPSK ,QPSK,16QAM,64QAM
Unmodulated modes:	No
Duty cycle:	Continuous operation possible for testing purposes
Type of the UUT:	Production models
Supporting equipment provided:	Please refer to Section 1.5



## 1.2 Test Standards

The tests were performed according to following standards:

**ETSI EN 300 328 V2.2.2 (2019-07)** Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ETSI EN 300328, The equipment under test (EUT) was configured to measure its highest possible emission level. For more detail refer to the Operating Instructions.

## 1.4 Test Facility

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



## 1.5 EUT Setup and Test Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, the EUT was operated in the engineering mode to fix the Tx/Rx frequency that was for the purpose of the measurements, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2442MHz, 2472MHz
TM2	802.11g	2412MHz, 2442MHz, 2472MHz
TM3	802.11n-HT20	2412MHz, 2442MHz, 2472MHz
TM4	802.11n-HT40	2422MHz, 2442MHz, 2462MHz
TM5	Receiving	/

Note: The product is a Load Based Equipment, The value of q is selected by the manufacturer is 32

	NTNV	LTNV	HTNV
Temperature (°C)	20	-5	50
Voltage (V)	DC 5V		
Relative Humidity:	45 %.		
ATM Pressure:	1019 mbar		

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/



## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Uncertainty	Note
Radio frequency	$\pm 0.4 \text{ ppm}$	(1)
Conducted RF Output Power	$\pm 0.42 \text{ dB}$	(1)
Occupied Bandwidth	$\pm 1 \times 10^{-7}$	(1)
Conducted Power Spectral Density	$\pm 0.70 \text{ dB}$	(1)
Conducted Spurious Emission	$\pm 2.17 \text{ dB}$	(1)
Radiated Spurious Emissions	30-200MHz $\pm 4.52 \text{ dB}$	(1)
	0.2-1GHz $\pm 5.56 \text{ dB}$	(1)
	1-6GHz $\pm 3.84 \text{ dB}$	(1)
	6-18GHz $\pm 3.92 \text{ dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .



## 1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	N9020A	US47140102	2020-04-28	2021-04-27
Signal Generator	Agilent	83752A	3610A01453	2020-04-28	2021-04-27
Vector Signal Generator	Agilent	N5182A	MY47070202	2020-04-28	2021-04-27
Power Sensor	Agilent	U2021XA	MY54250019	2020-04-28	2021-04-27
Power Sensor	Agilent	U2021XA	MY54250021	2020-04-28	2021-04-27
Simultaneous Sampling	Agilent	U2531A	TW54243509	2020-04-28	2021-04-27
Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2019-05-05	2021-05-04
Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
Temperature&Humidity Chamber	GONGWEN	GDJS-800	/	2020-04-28	2021-04-27
DC Power Supply	ATTEN	APS3005Dm	/	2020-04-28	2021-04-27
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	/	2020-04-28	2021-04-27

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing



## 2. SUMMARY OF TEST RESULTS

Standards	Reference	Description of Test Item	Result
EN 300 328	4.3.2.2	RF Output Power	Passed
	4.3.2.3	Power Spectral Density	Passed
	4.3.2.4	Duty Cycle, Tx-sequence, Tx-gap	N/A
	4.3.2.5	Medium Utilisation (MU) Factor	N/A
	4.3.2.6	Adaptivity (adaptive equipment using modulations other than FHSS)	Passed
	4.3.2.7	Occupied Channel Bandwidth	Passed
	4.3.2.8	Transmitter Unwanted Emissions in the Out-of-band Domain	Passed
	4.3.2.9	Transmitter Unwanted Emissions in the Spurious Domain	Passed
	4.3.2.10	Receiver Spurious Emissions	Passed
	4.3.2.11	Receiver Blocking	Passed
	4.3.2.12	Geo-location capability	N/A
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: not applicable			

**WALTEK**



## 3. RF Output Power

### 3.1 Standard Applicable

According to Section 4.3.1.2.3, the maximum RF output power for adaptive Frequency Hopping equipment shall be equal to or less than 20 dBm. The maximum RF output power for non-adaptive Frequency Hopping equipment, shall be declared by the supplier. The maximum RF output power for this equipment shall be equal to or less than the value declared by the supplier. This declared value shall be equal to or less than 20 dBm.

According to Section 4.3.2.2.3, For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm. The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

### 3.2 Test Procedure

According to section 5.4.2.2.1.2 of the standard EN 300328, the test procedure shall be as follows:

#### Step 1:

- Use a fast power sensor suitable for 2,4 GHz and capable of 1 MS/s.
- Use the following settings: - Sample speed 1 MS/s or faster.
  - The samples must represent the power of the signal.
  - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clauses 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

#### Step 2:

- For conducted measurements on devices with one transmit chain:
  - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
  - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
  - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than half the time between two samples.
  - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps..

#### Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.



NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

**Step 4:**

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

**Step 5:**

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

**Step 6:**

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below:  $P = A + G + Y$
- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

### 3.3 Summary of Test Results

**WALTEK**

**Antenna A:**

Test Conditions	EIRP (dBm)			Limit
	Lowest CH	Middle CH	Highest CH	
802.11b				
NTNV	18.16	17.86	18.53	20
LTNV	18.13	17.82	18.50	20
HTNV	18.15	17.85	18.52	20
802.11g				
NTNV	15.98	15.62	15.56	20
LTNV	15.93	15.58	15.51	20
HTNV	15.96	15.60	15.54	20

**Antenna B:**


Test Conditions	EIRP (dBm)			Limit
	Lowest CH	Middle CH	Highest CH	
802.11b				
NTNV	18.30	18.42	18.38	20
LTNV	18.25	18.39	18.34	20
HTNV	18.29	18.40	18.36	20
802.11g				
NTNV	15.55	15.69	15.59	20
LTNV	15.52	15.63	15.53	20
HTNV	15.54	15.67	15.57	20


**MIMO(Antenna A+ B):**


Test Conditions	EIRP (dBm)			Limit
	Lowest CH	Middle CH	Highest CH	
802.11n HT20				
NTNV	17.44	16.94	17.16	20
LTNV	17.40	16.90	17.12	20
HTNV	17.42	16.93	17.14	20
802.11n HT40				
NTNV	17.12	17.01	17.46	20
LTNV	17.08	16.96	17.41	20
HTNV	17.10	16.99	17.44	20




Antenna A:

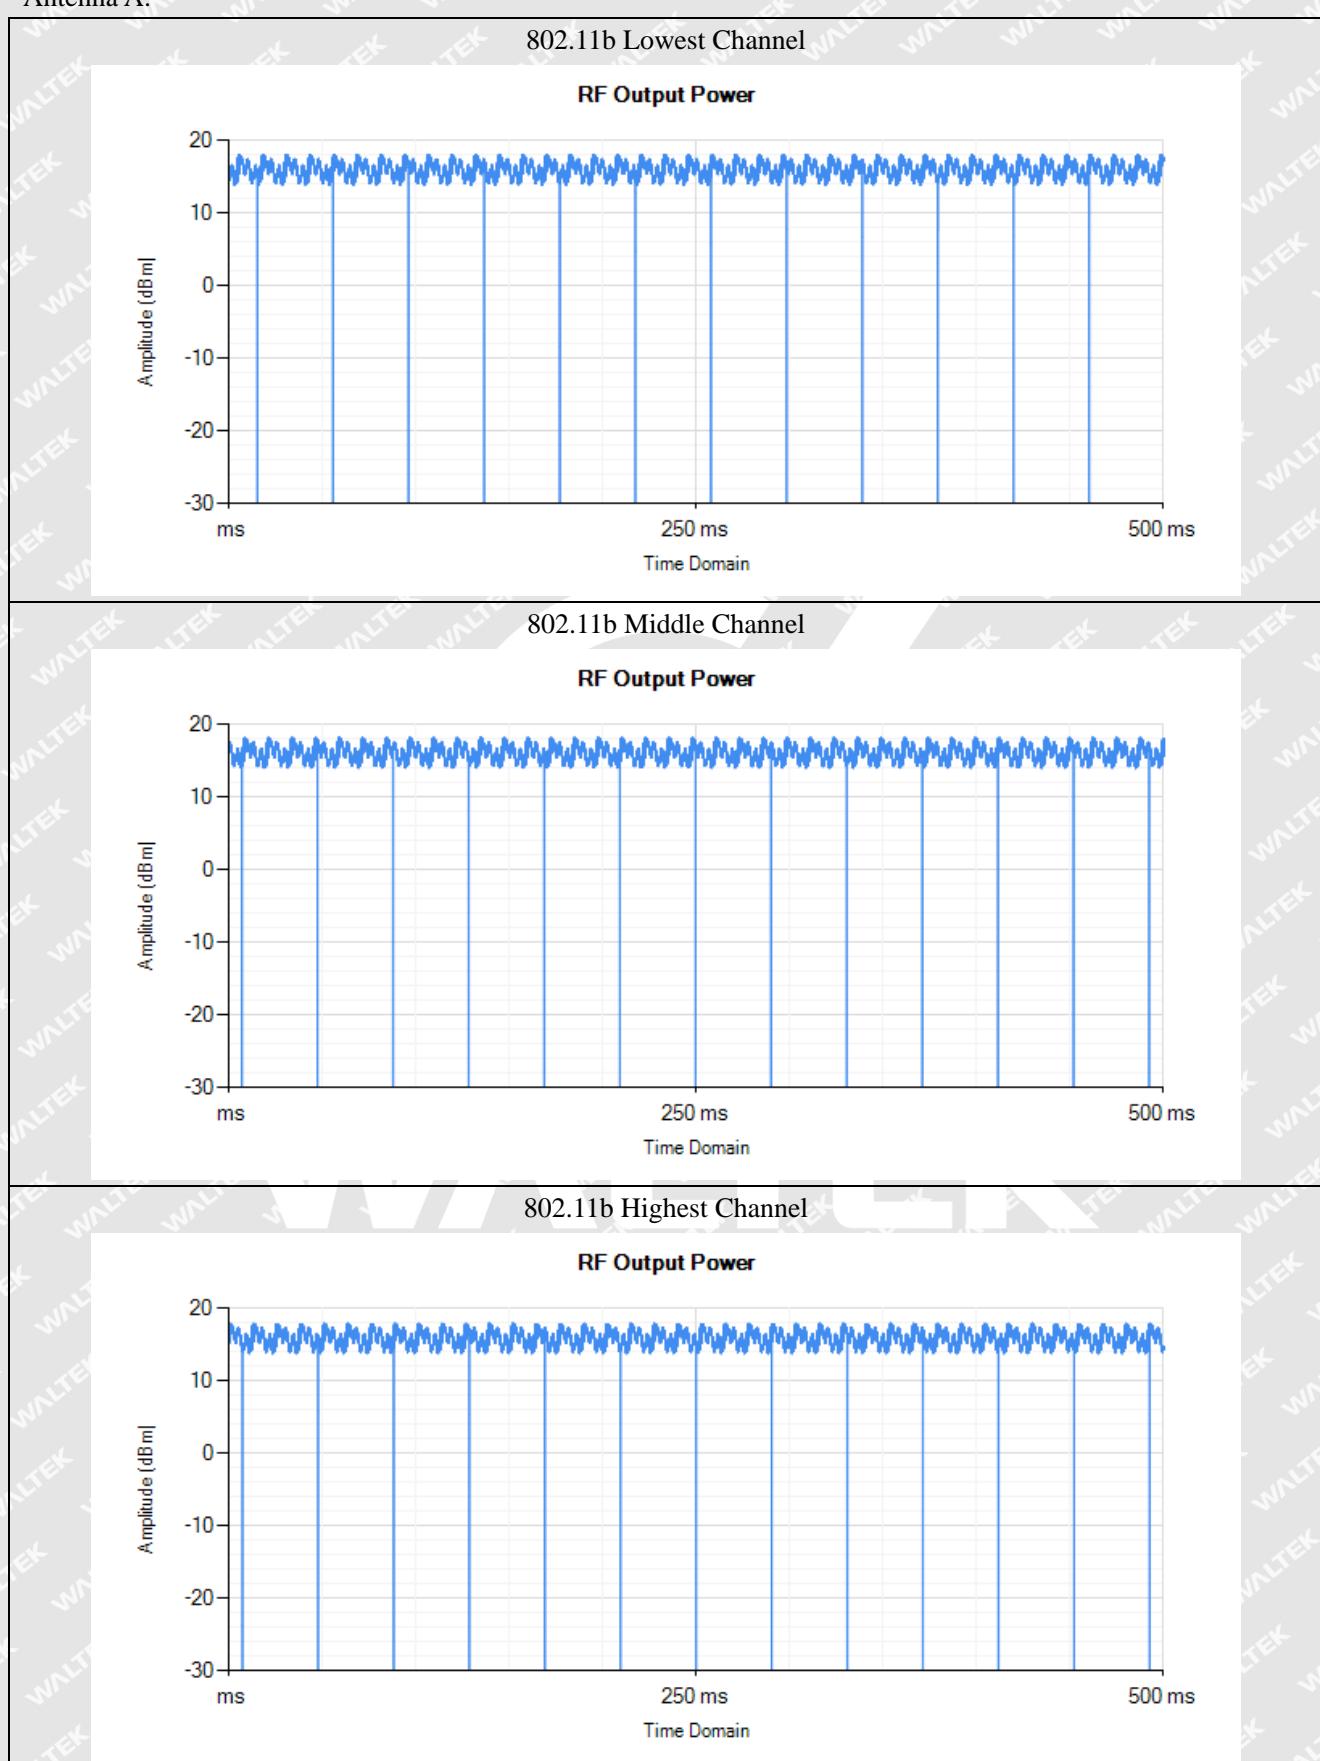

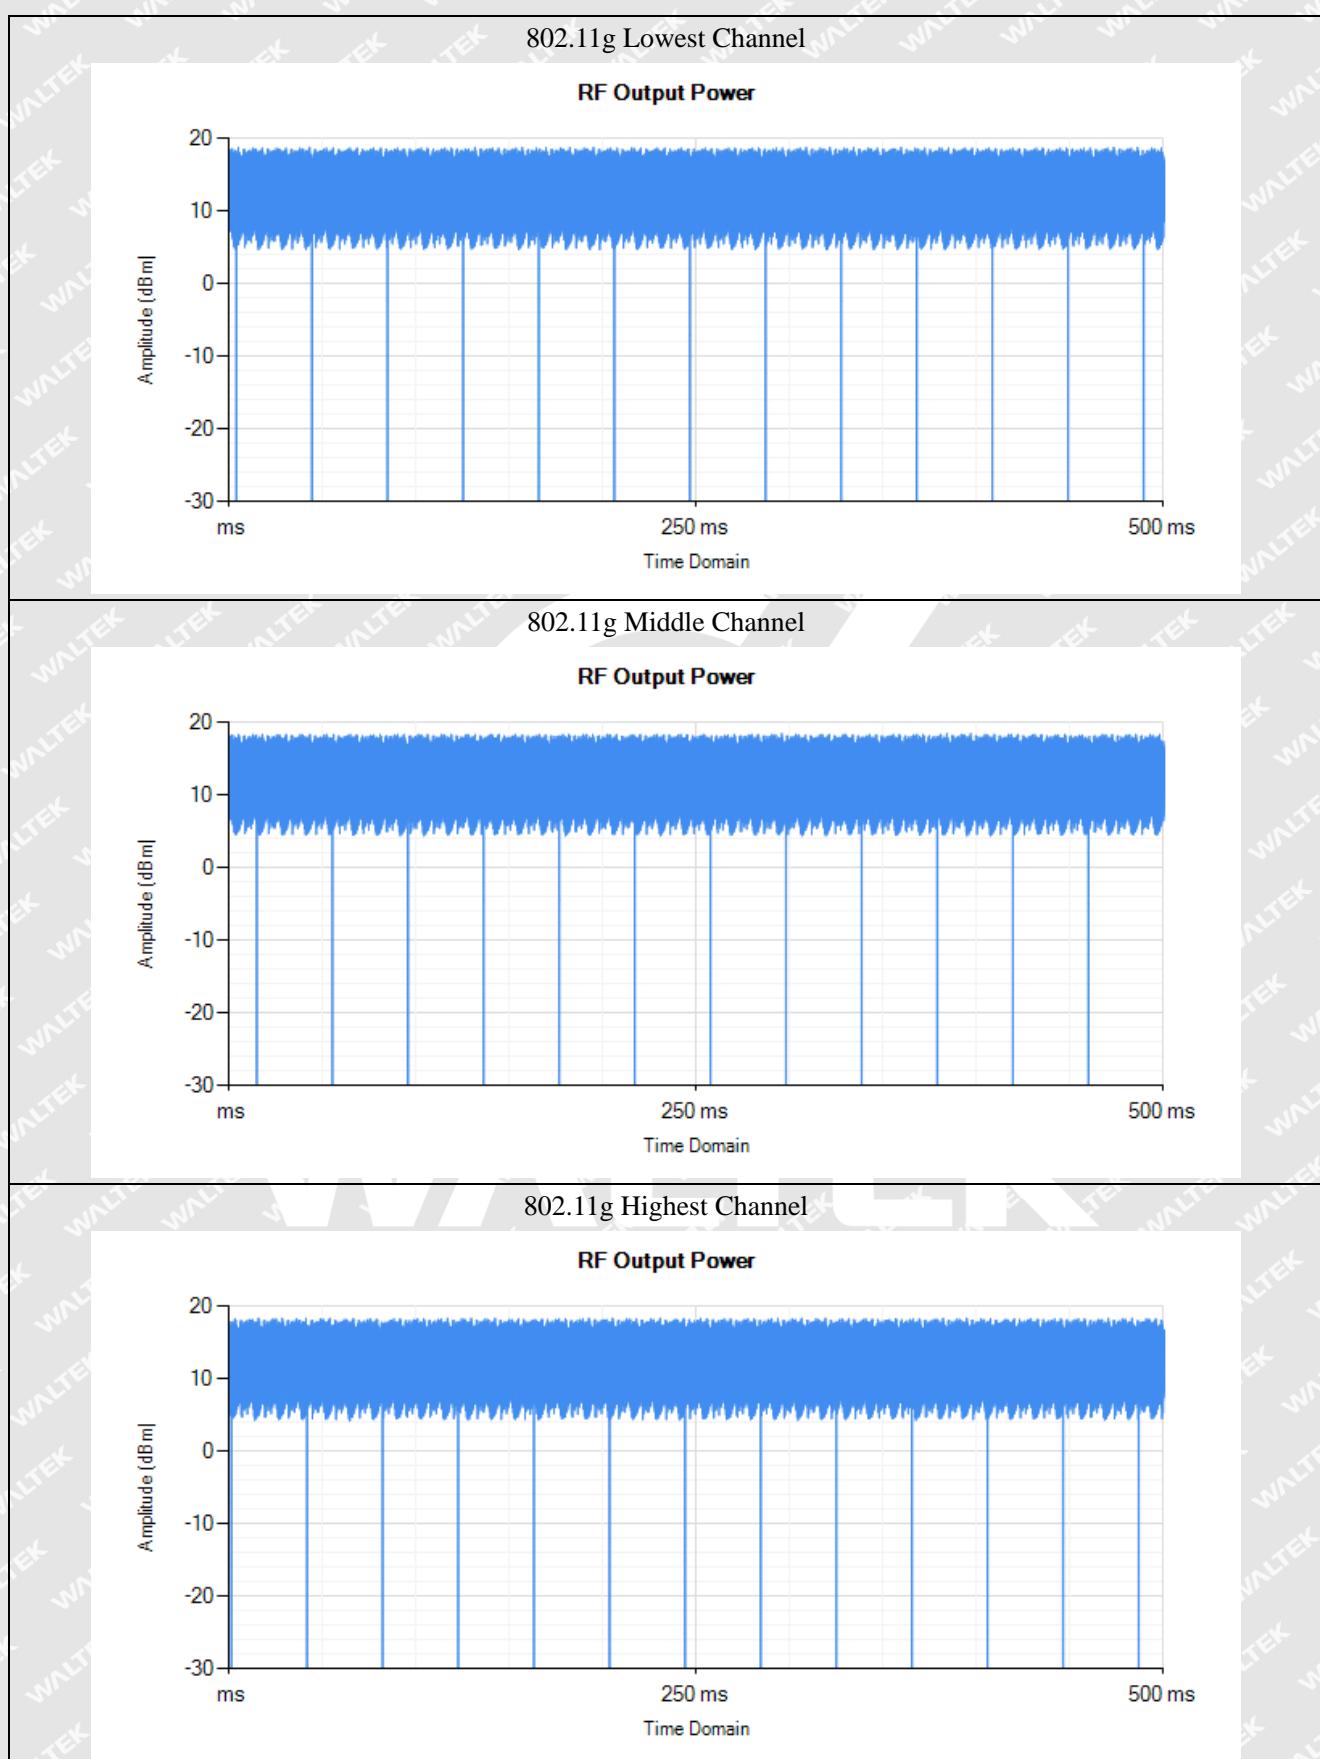


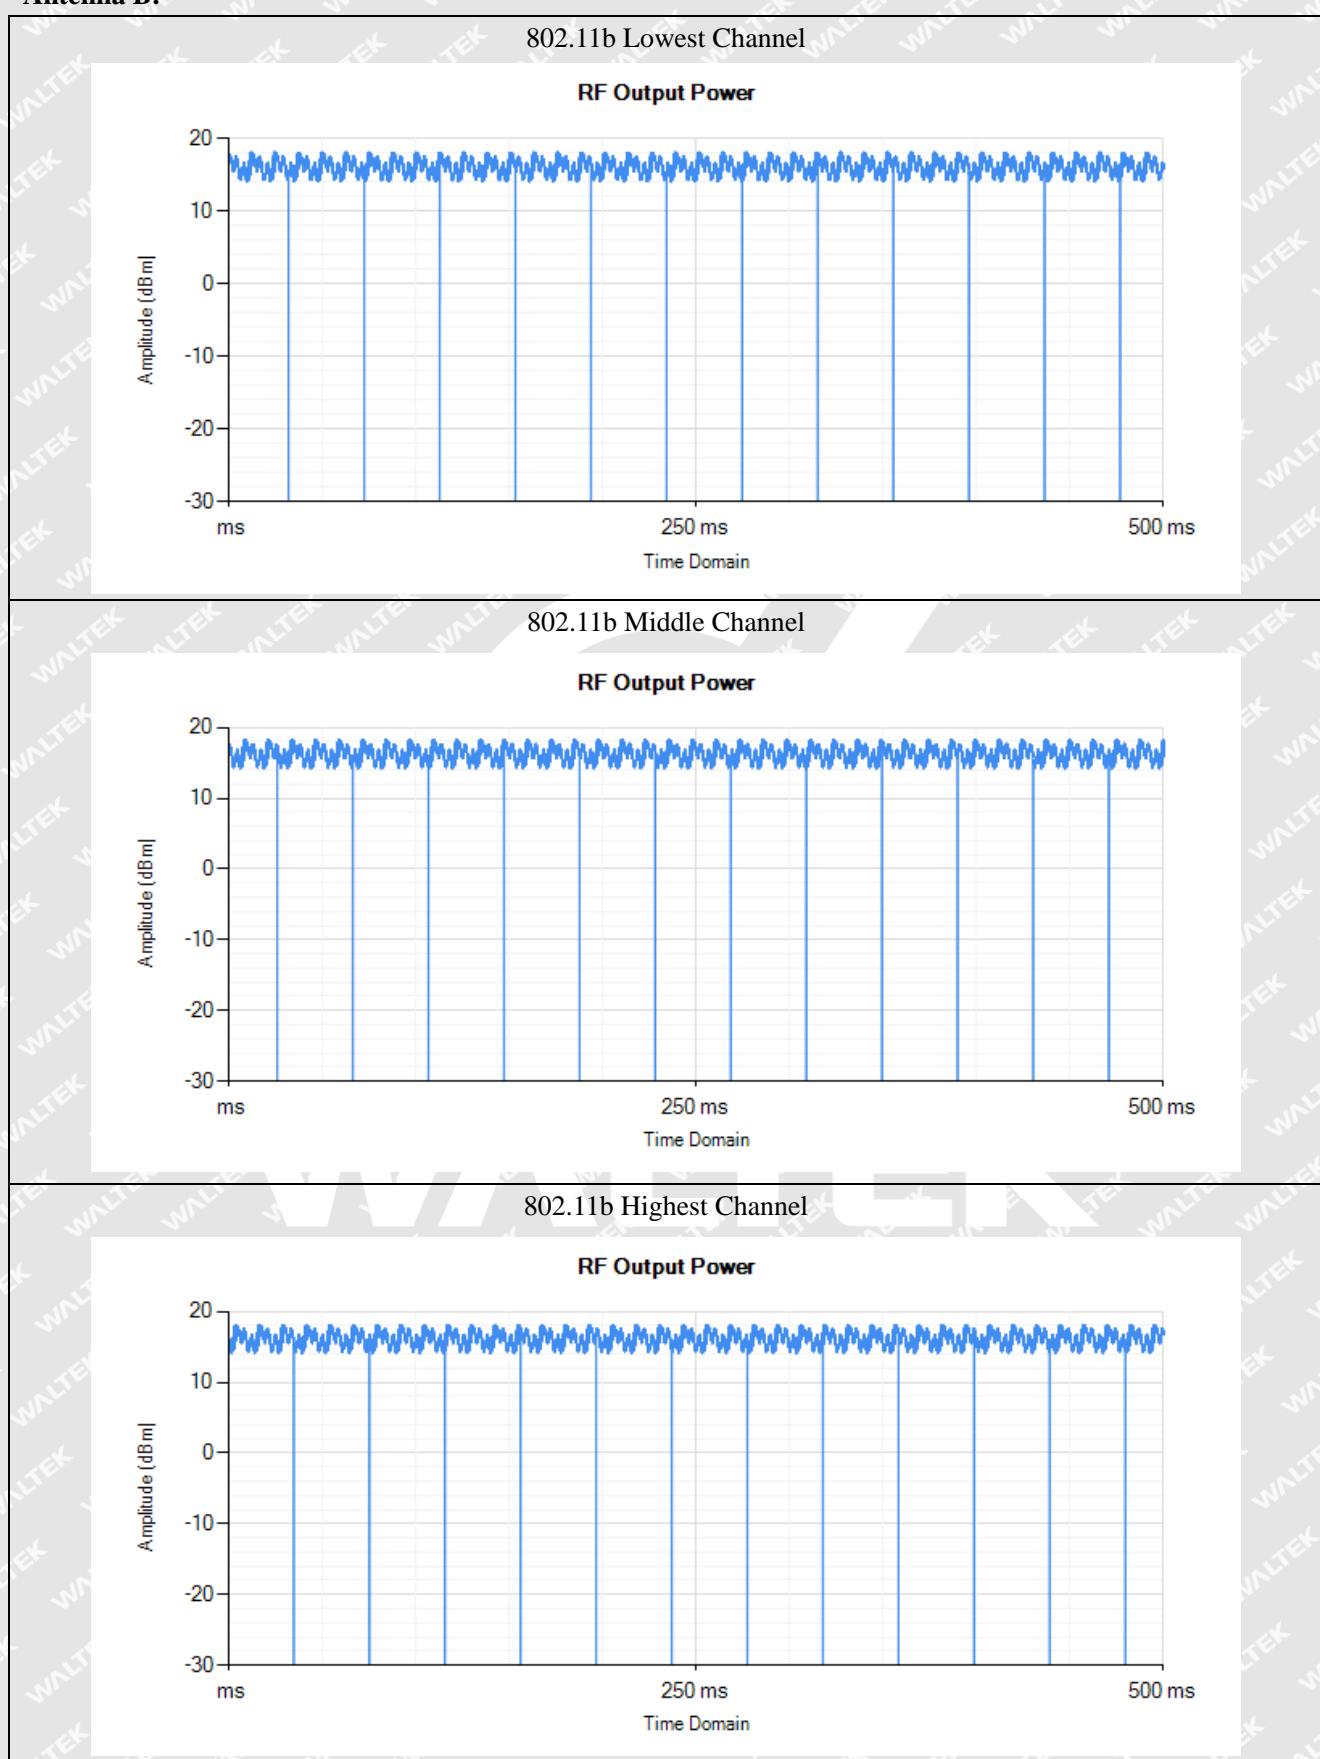**Antenna B:**

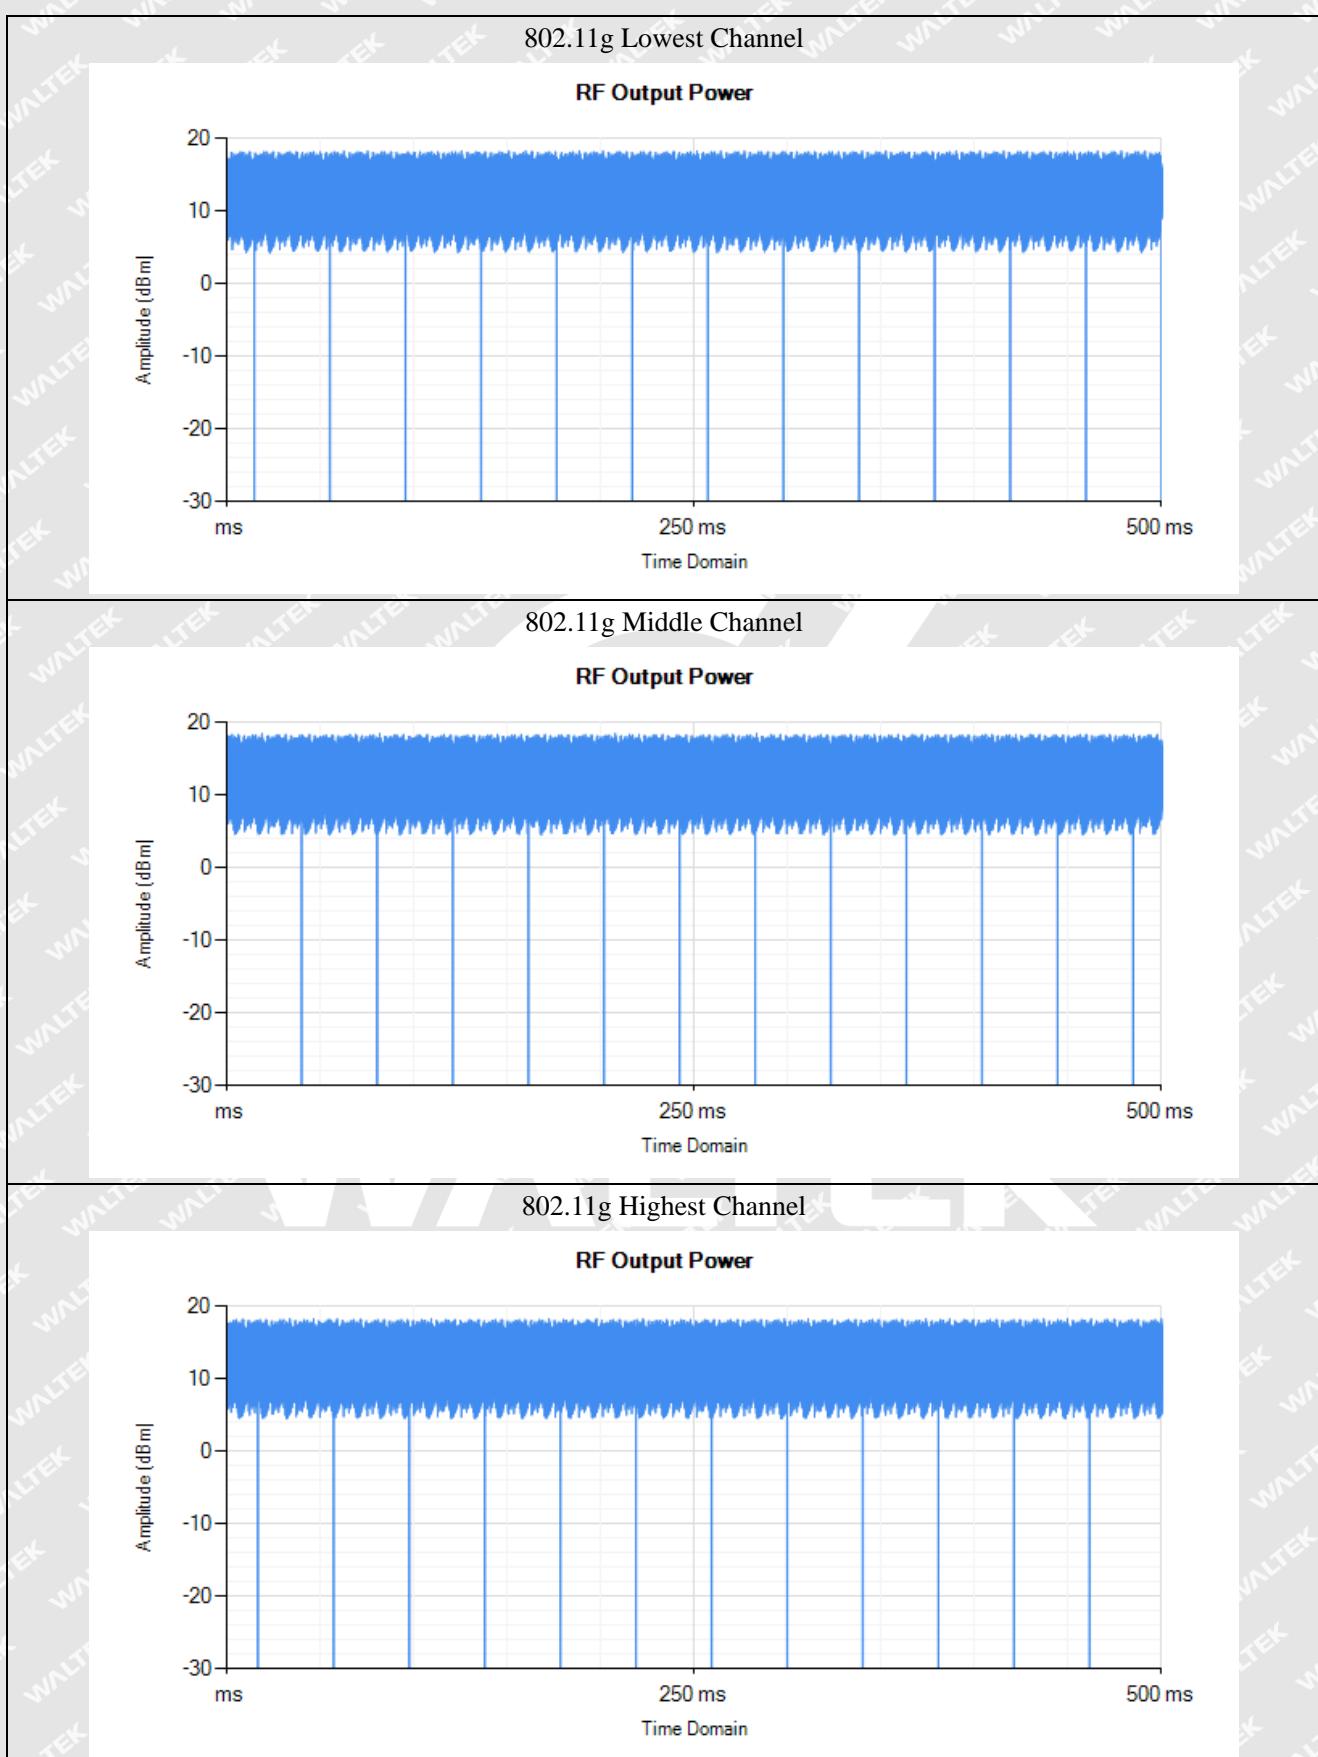


**MIMO(Antenna A+ B):**


802.11n HT20 Lowest Channel

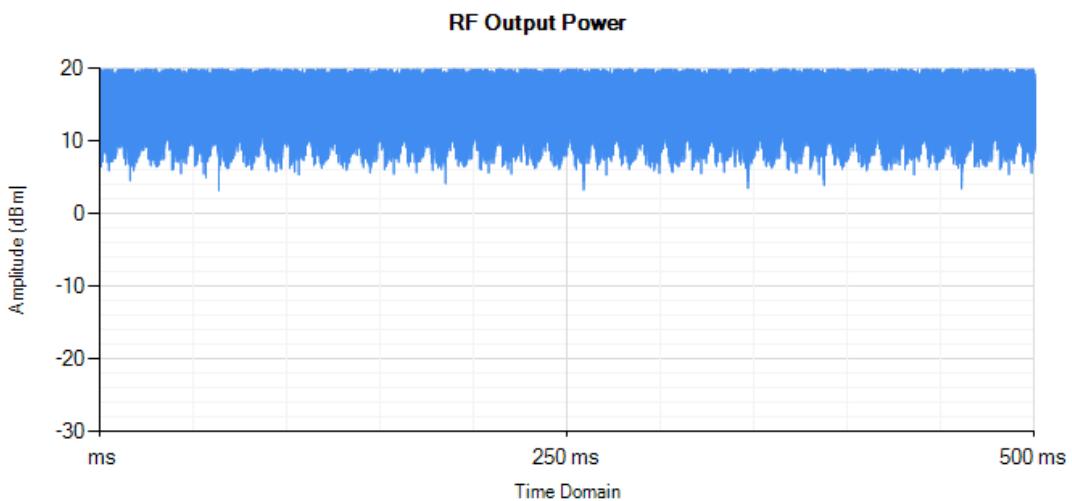


802.11n HT20 Middle Channel

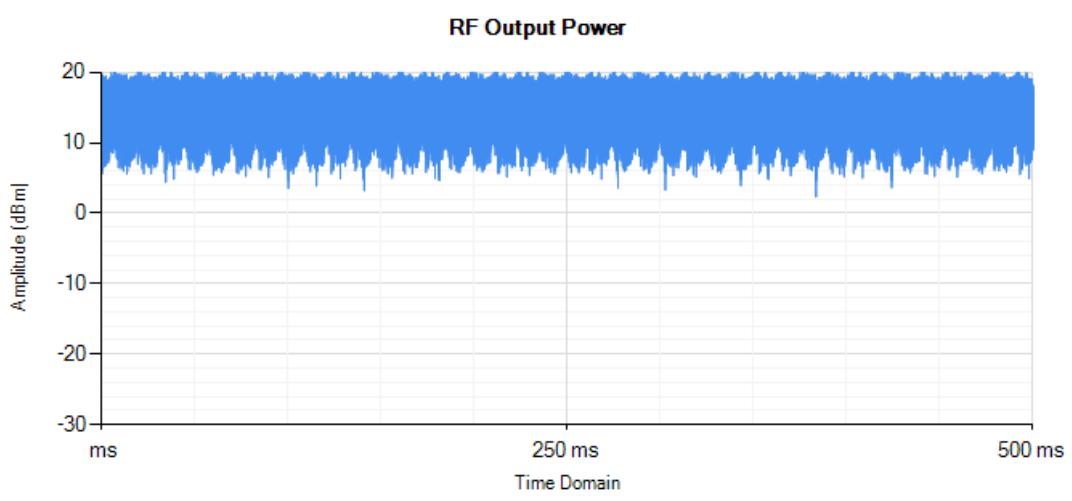

802.11n HT20 Highest Channel

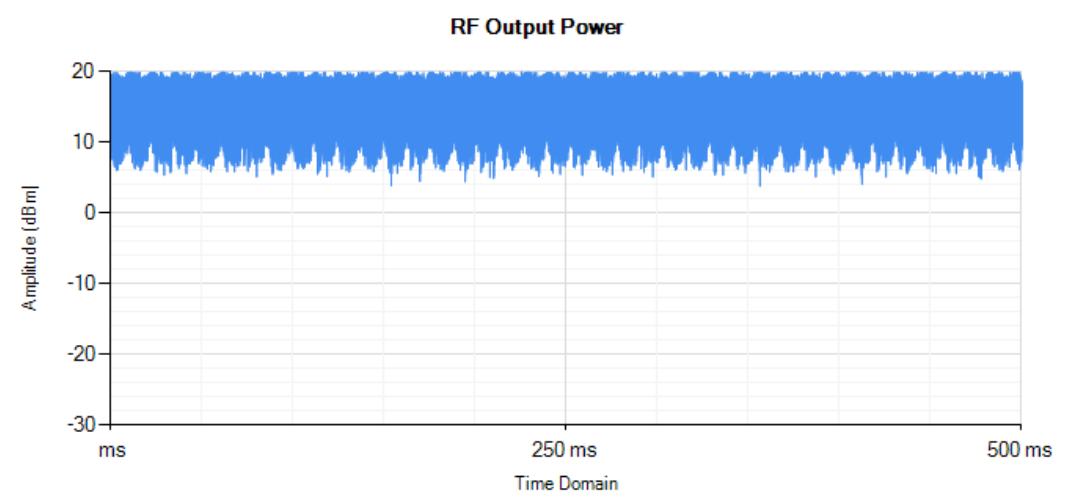

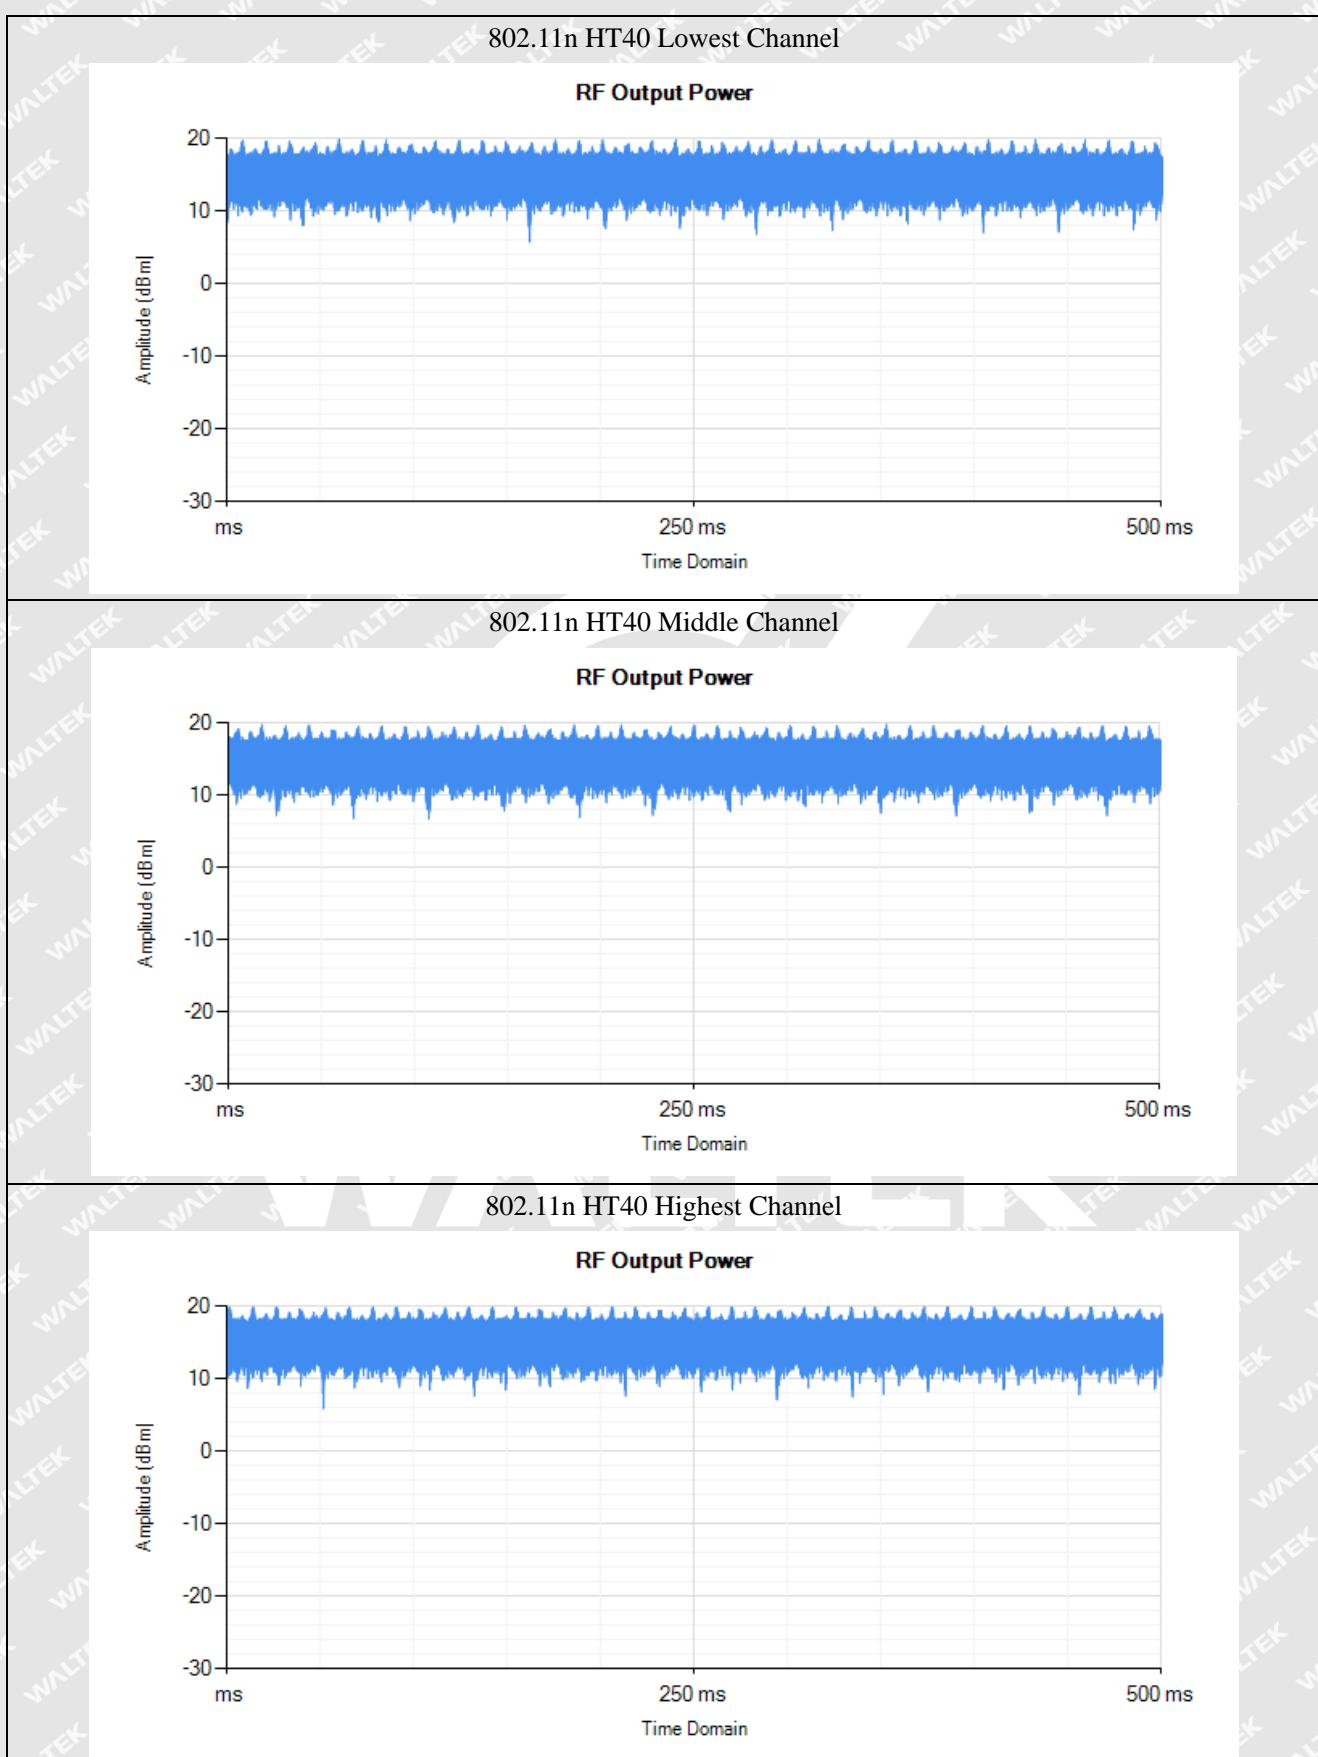



## 4. Power Spectral Density

### 4.1 Standard Applicable

According to Section 4.3.2.3.3, for equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

### 4.2 Test Procedure

According to section 5.4.3.2.1 of the standard EN 300328, the test procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350

NOTE: For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.

- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: Auto

For non-continuous signals, wait for the trace to be completed. Save the (trace) data set to a file.

Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or 3 (see clause 5.1.3.2), repeat the measurement for each of the transmit ports. For each frequency point, add up the amplitude (power) values for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for amplitude (power) for all the samples in the file.

Step 4:

Normalize the individual values for amplitude so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2.

Step 5:

Starting from the first sample in the file (lowest frequency), add up the power of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

**Step 6:**

Shift the start point of the samples added up in step 5 by 1 sample and repeat the procedure in step 5 (i.e. sample #2 to #101).

**Step 7:**

Repeat step 6 until the end of the data set and record the radiated Power Spectral Density values for each of the 1 MHz segments.

From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

RBW/VBW=10/30 kHz

### 4.3 Summary of Test Results

**Antenna A:**

<b>Test Mode</b>	<b>Test Frequency</b>	<b>Spectral Density</b>	<b>Limit</b>
	<b>MHz</b>	<b>dBm/MHz</b>	<b>dBm/MHz</b>
802.11b	2412	9.48	10
	2442	9.58	10
	2472	9.81	10
802.11g	2412	5.09	10
	2442	4.75	10
	2472	4.67	10

**Antenna B:**


<b>Test Mode</b>	<b>Test Frequency</b>	<b>Spectral Density</b>	<b>Limit</b>
	<b>MHz</b>	<b>dBm/MHz</b>	<b>dBm/MHz</b>
802.11b	2412	9.59	10
	2442	9.70	10
	2472	9.65	10
802.11g	2412	4.63	10
	2442	4.85	10
	2472	4.63	10


**MIMO(Antenna A + B):**


<b>Test Mode</b>	<b>Test Frequency</b>	<b>Spectral Density</b>	<b>Limit</b>
	<b>MHz</b>	<b>dBm/MHz</b>	<b>dBm/MHz</b>
802.11n HT20	2412	6.34	10
	2442	5.80	10
	2472	6.00	10
802.11n HT40	2412	2.21	10
	2442	2.08	10
	2472	2.67	10



Antenna A:

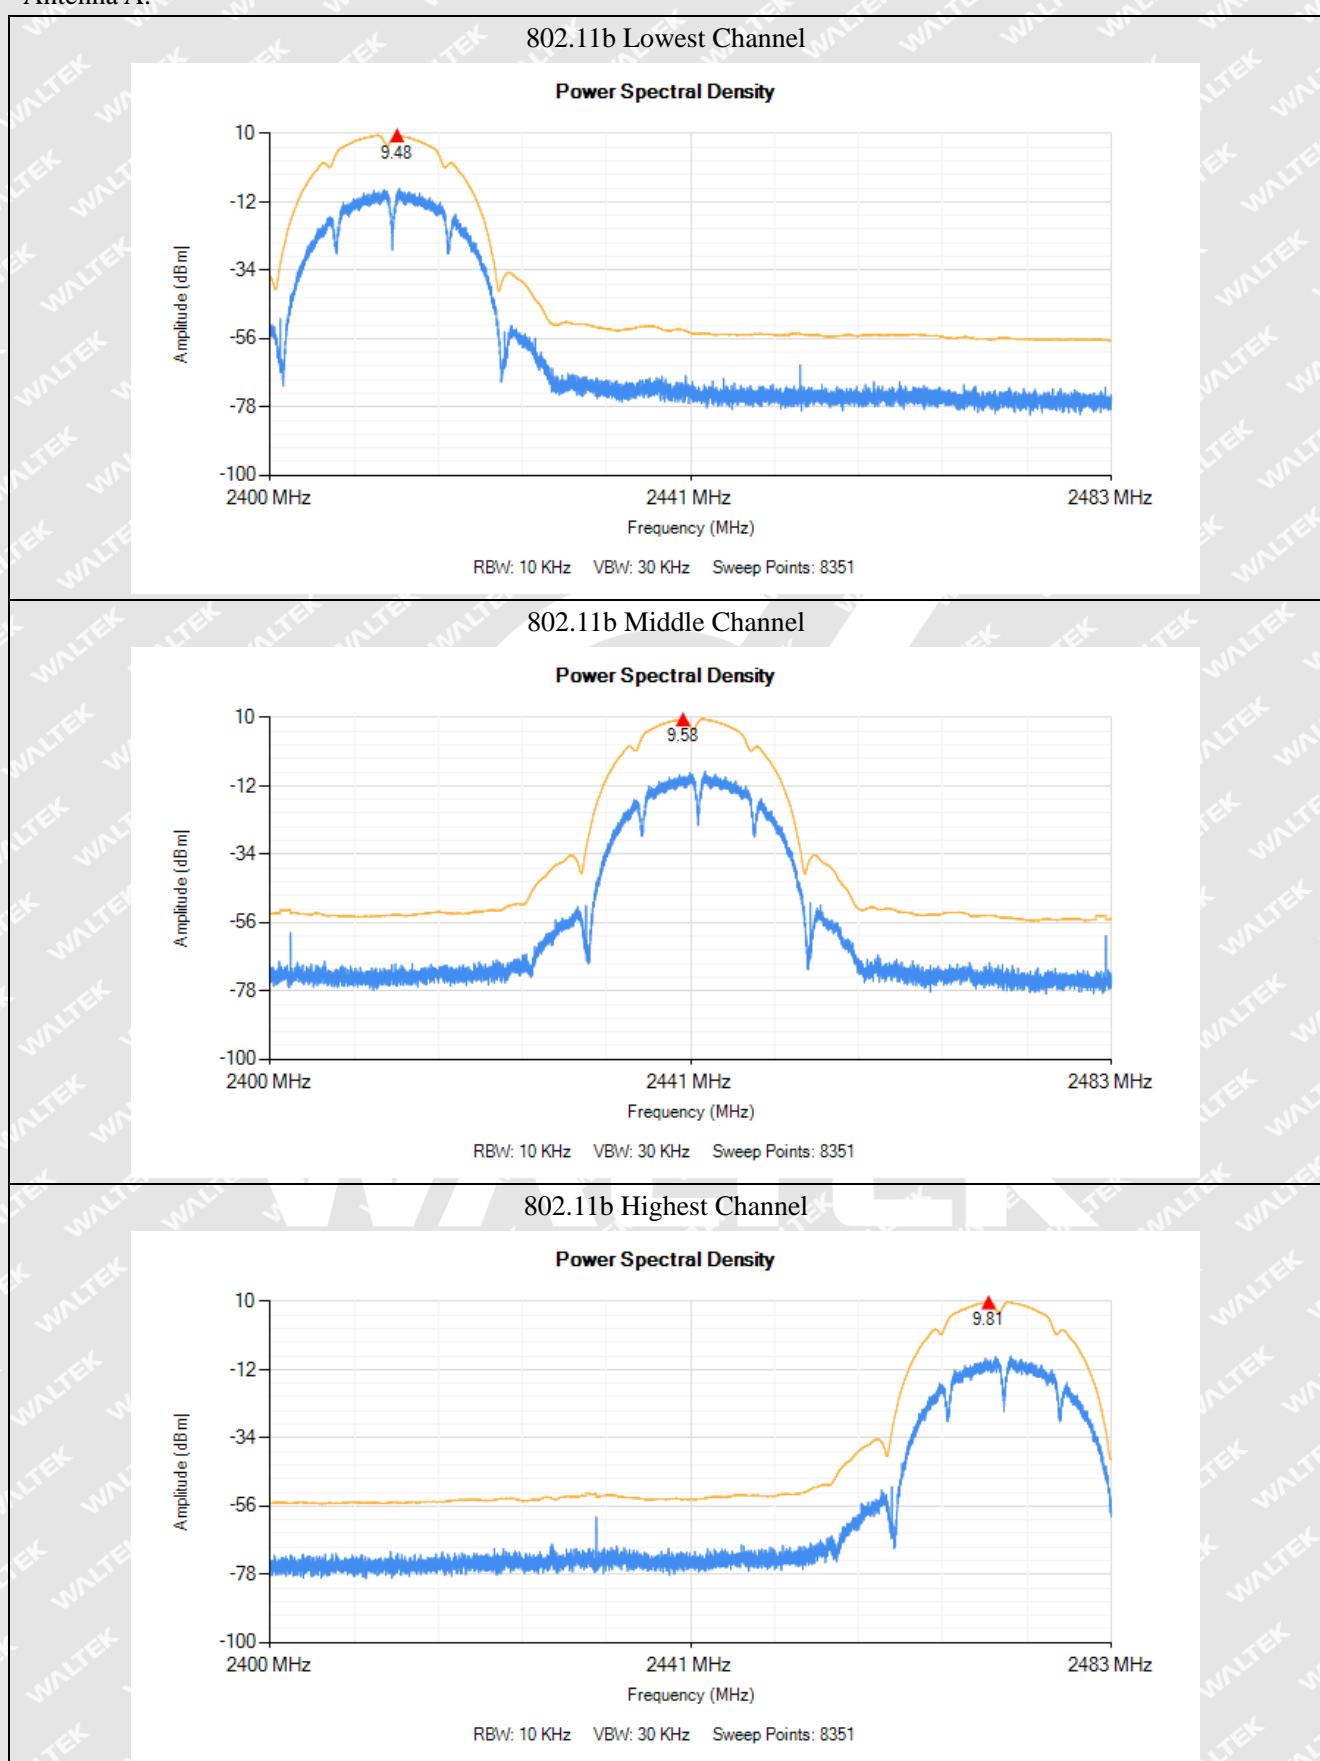

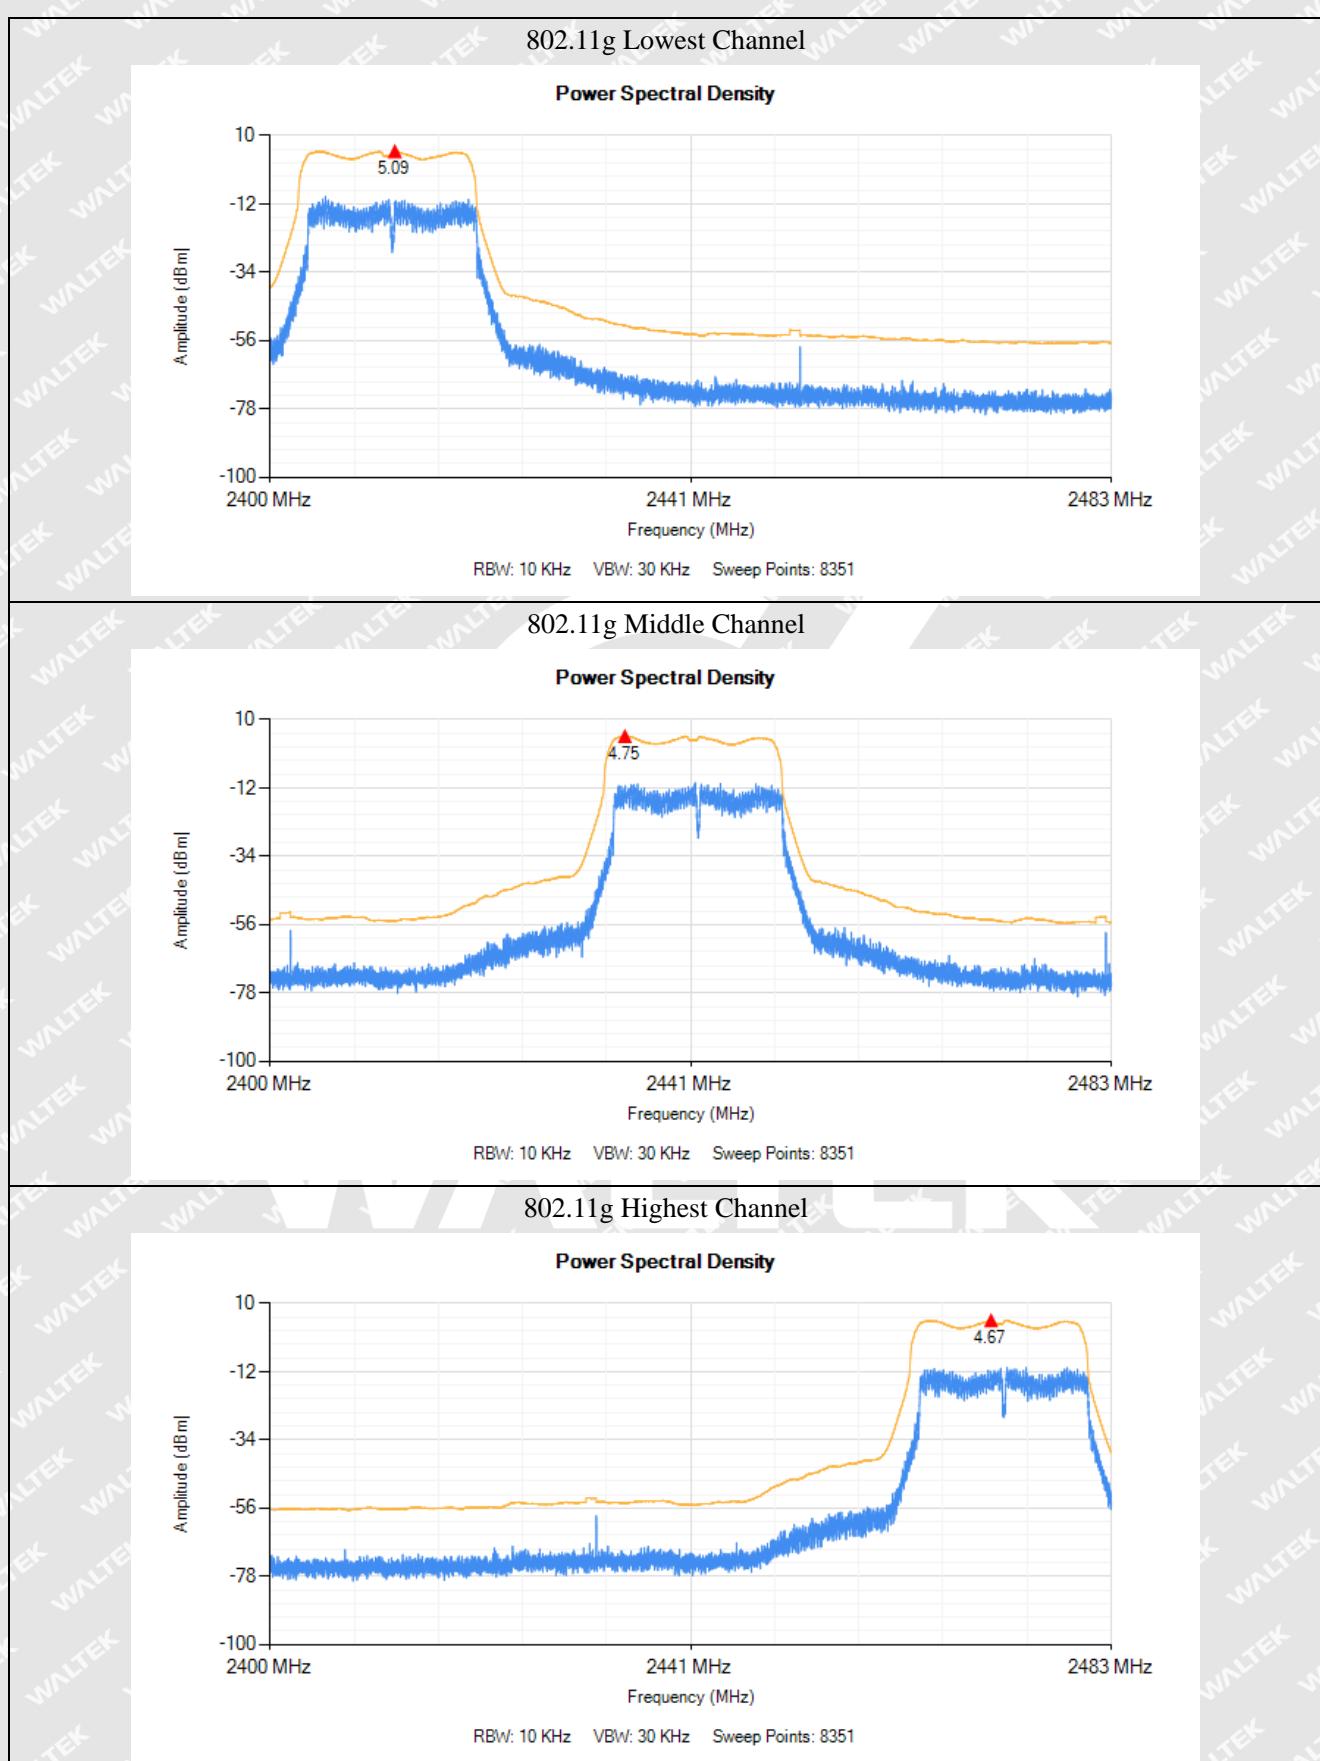


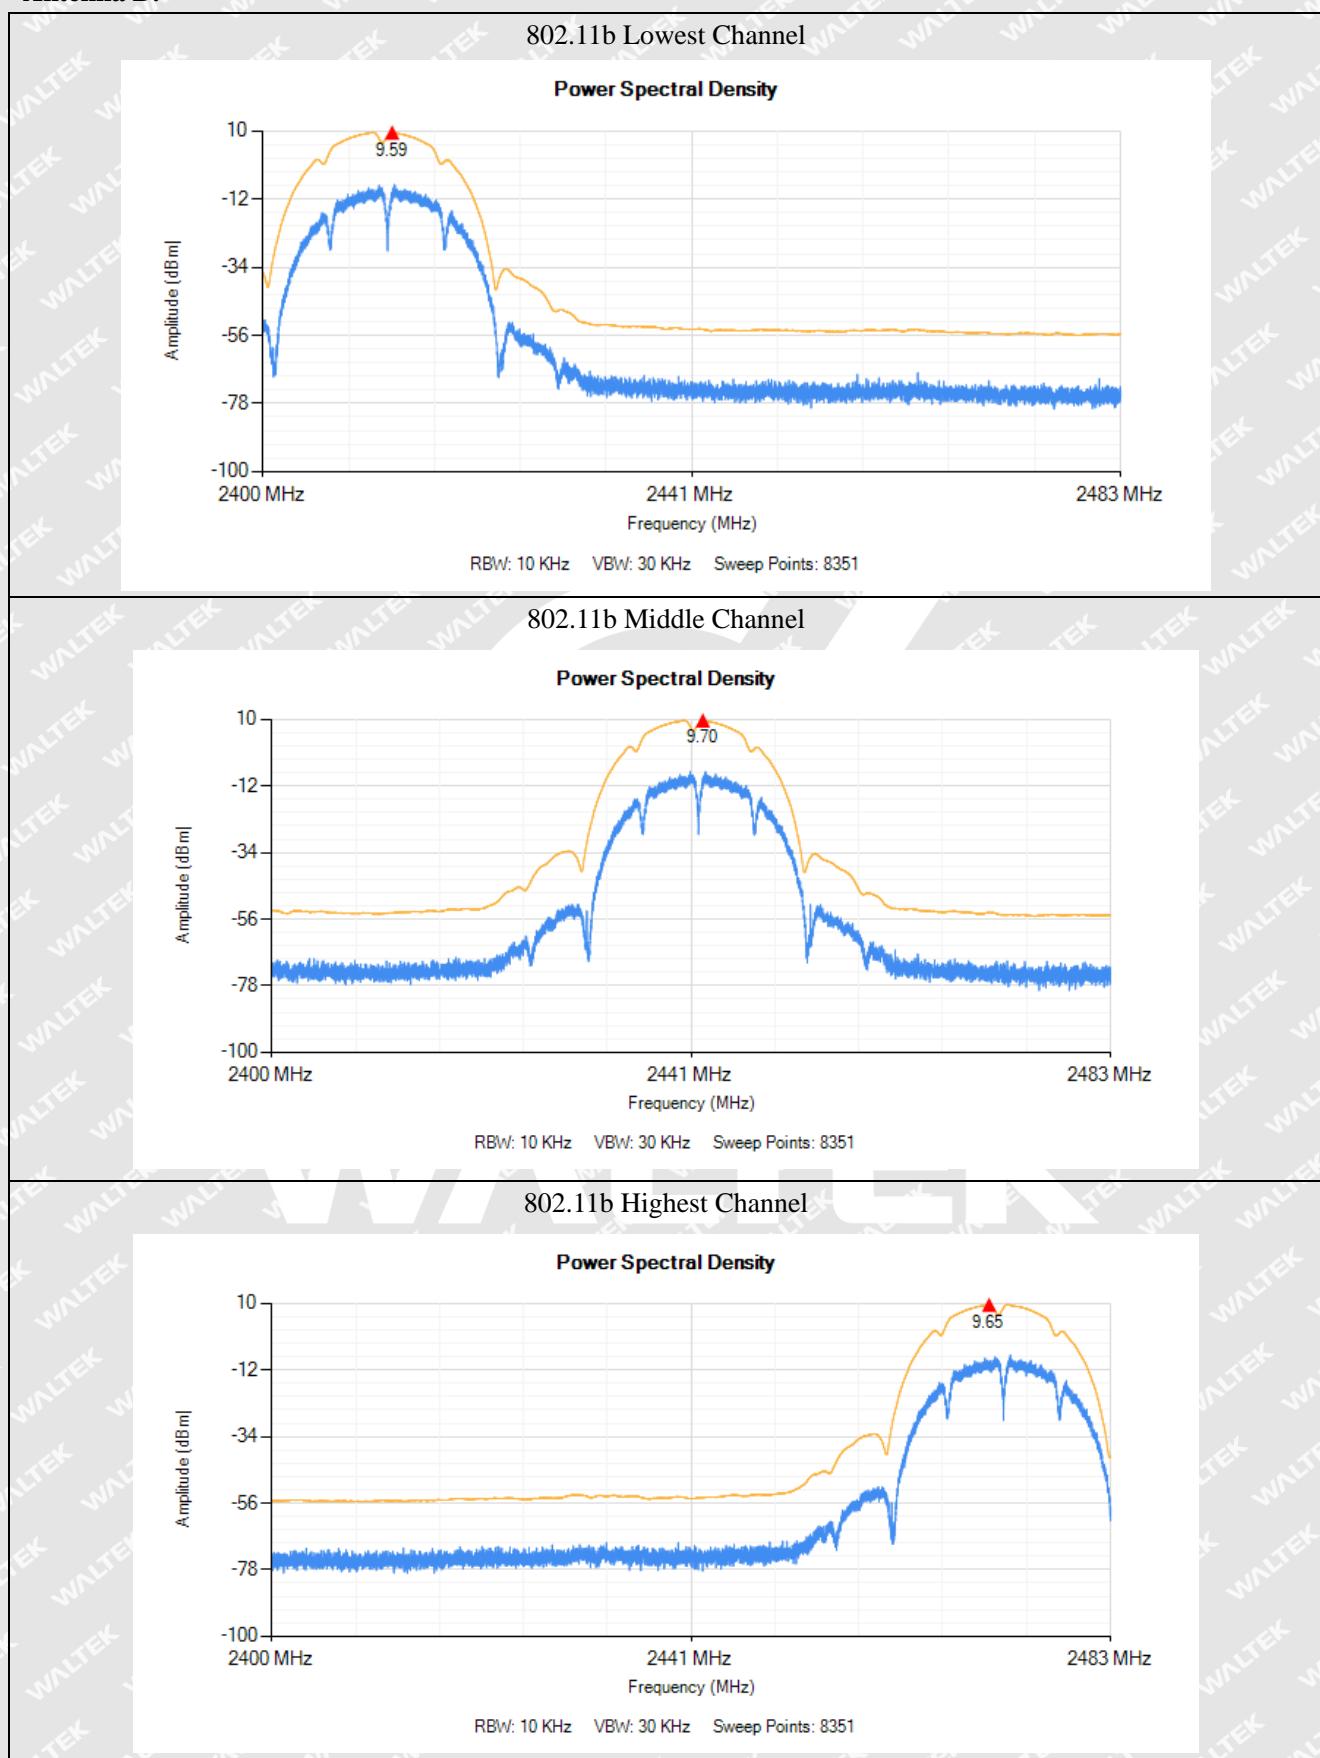**Antenna B:**




## 802.11g Lowest Channel

Power Spectral Density

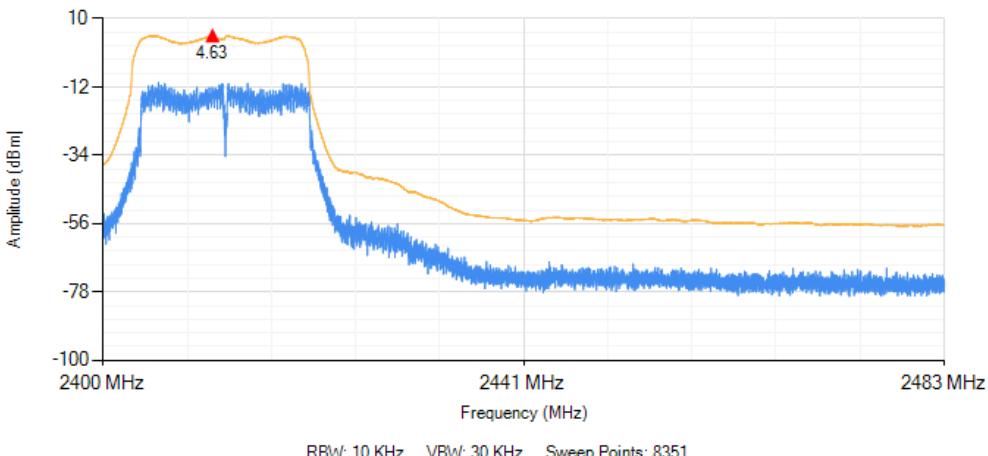


## 802.11g Middle Channel

Power Spectral Density

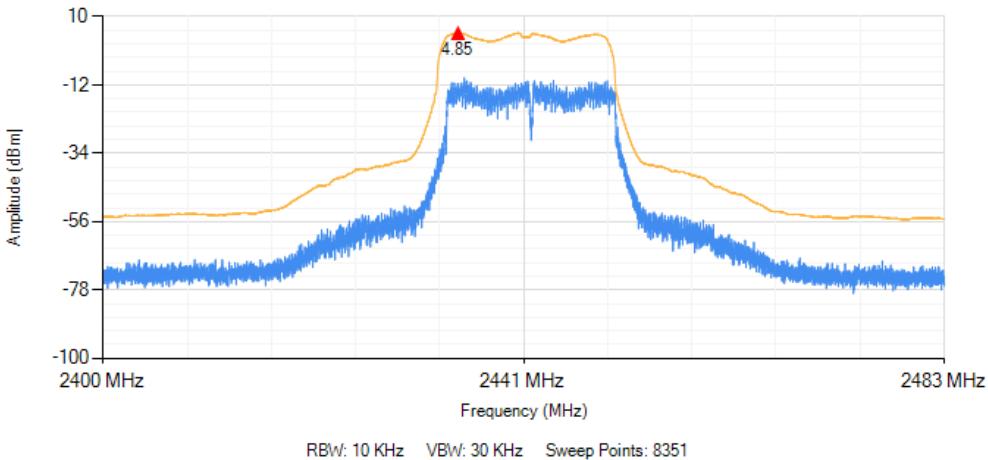


## 802.11g Highest Channel

Power Spectral Density

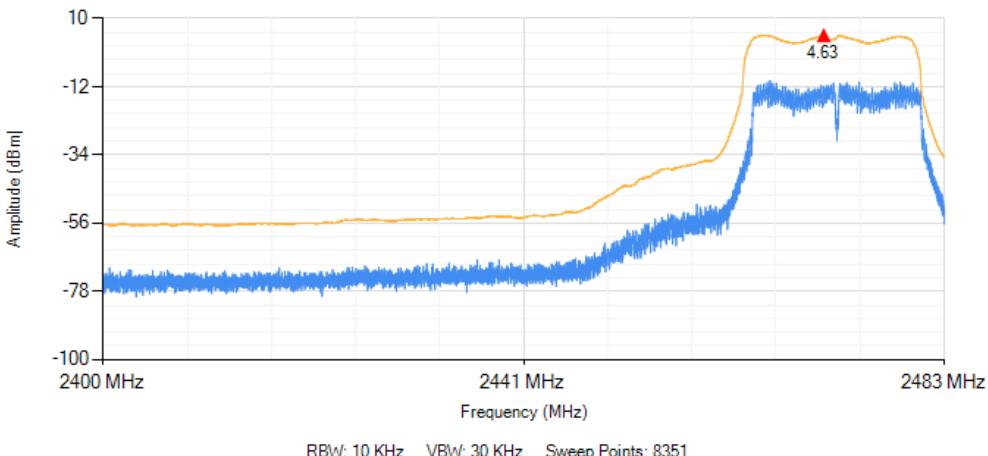


**MIMO(Antenna A + B):**


802.11n HT20 Lowest Channel

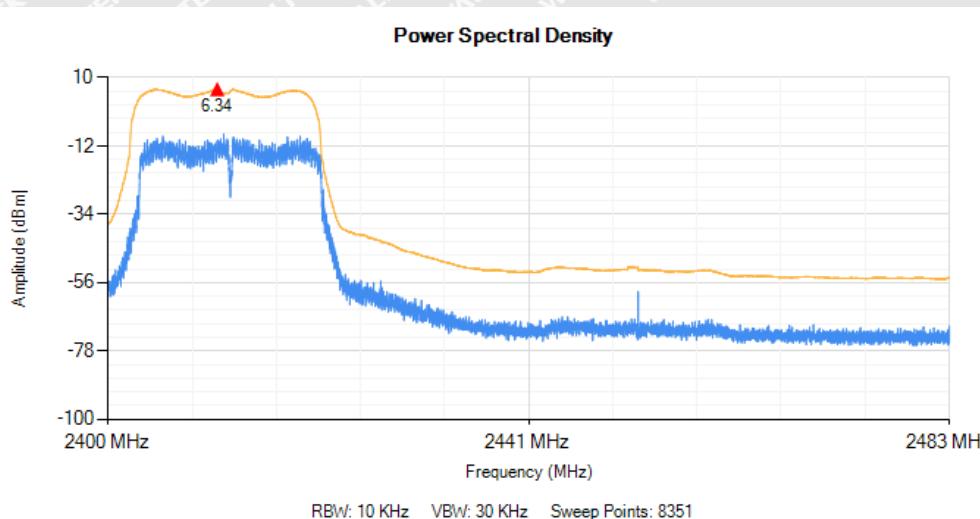


802.11n HT20 Middle Channel

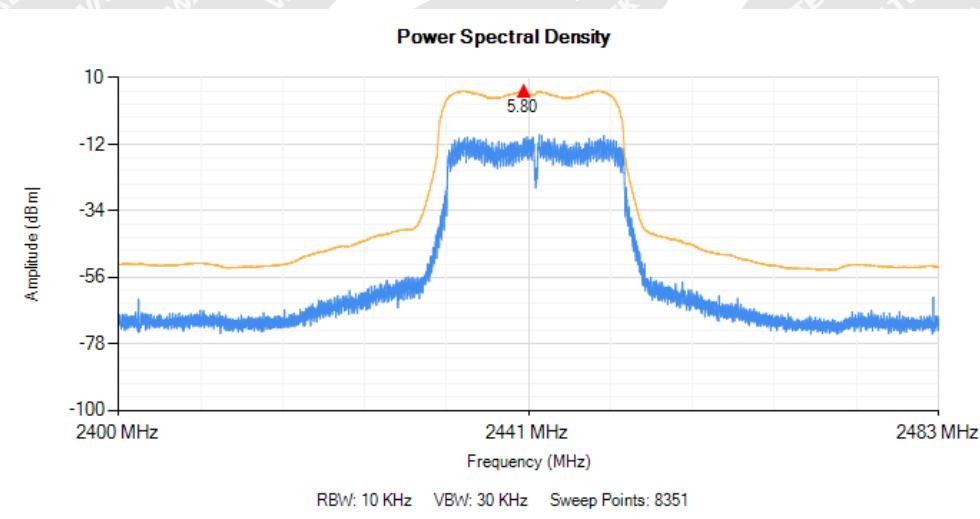

802.11n HT20 Highest Channel

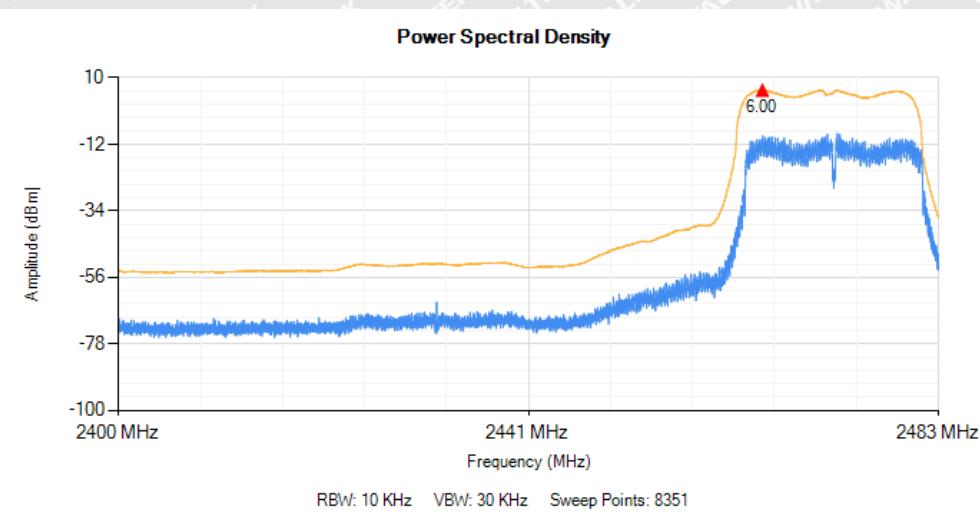

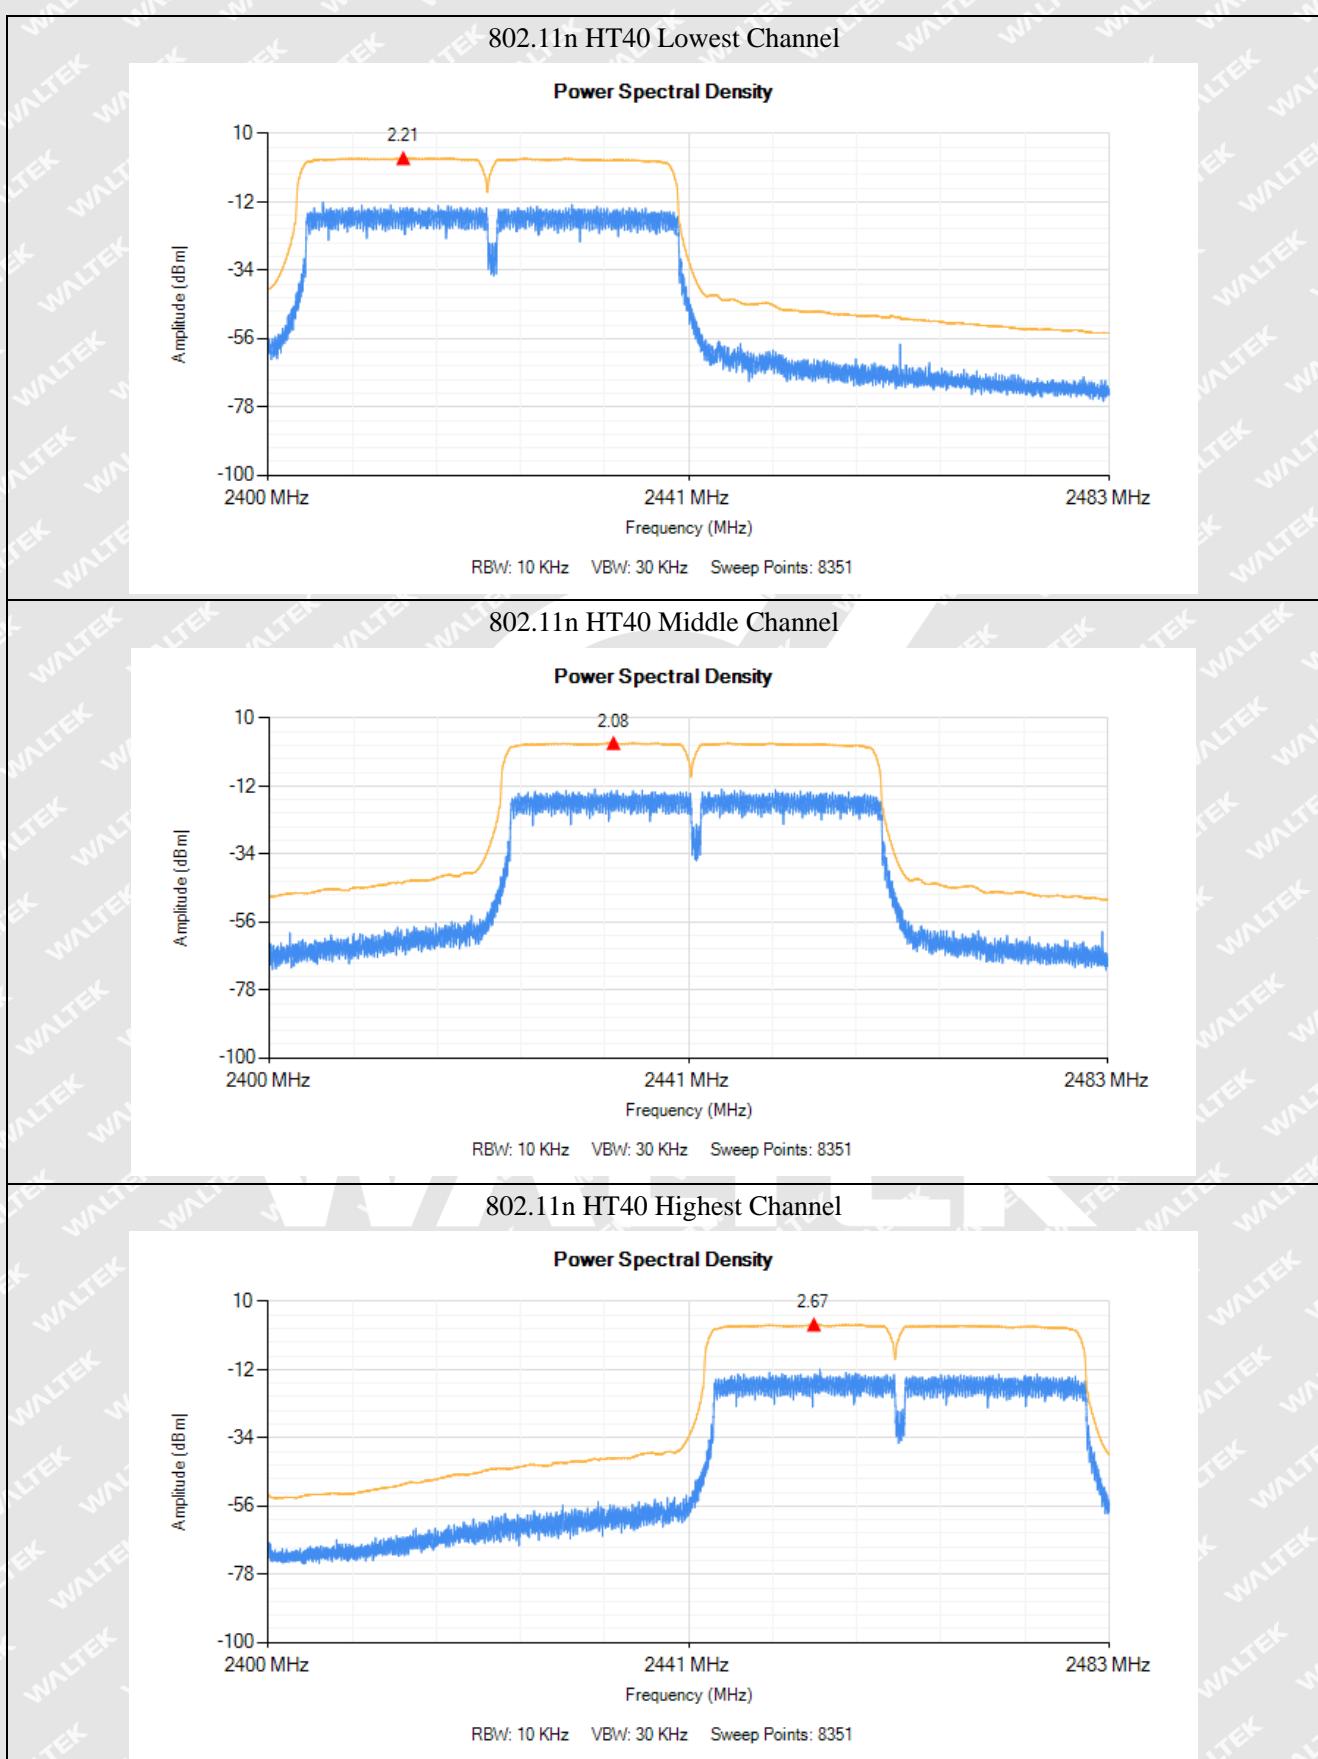



## 5. Adaptivity

### 5.1 Standard Application

According to section 4.3.2.6.2.2.2, Load Based Equipment shall comply with the following requirements:

Load Based Equipment may implement an LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using energy detect, as described in IEEE Std. 802.11™-2007 [i.4] clauses 9, 15, 18 or 19, in IEEE Std. 802.11n™-2009 [i.4], clauses 9, 11 and 20 or in IEEE Std. 802.15.4™-2011 [i.5], clauses 4 and 5 providing they comply with the conformance requirements referred to in clause 4.3.2.6.3.2.

Equipment using a modulation other than FHSS and using the non-LBT based Detect and Avoid mechanism, shall comply with the following minimum set of requirements:

- 1) During normal operation, the equipment shall evaluate the presence of a signal on its current operating channel. If it is determined that a signal is present with a level above the detection threshold defined in step 5) the channel shall be marked as 'unavailable'.
- 2) The channel shall remain unavailable for a minimum time equal to 1 s after which the channel may be considered again as an 'available' channel.
- 3) The total time during which an equipment has transmissions on a given channel without re-evaluating the availability of that channel, is defined as the Channel Occupancy Time.
- 4) The Channel Occupancy Time shall be less than 40 ms. Each such transmission sequence shall be followed by an Idle Period (no transmissions) of minimum 5 % of the Channel Occupancy Time with a minimum of 100 µs. After this, the procedure as in step 1) needs to be repeated.
- 5) The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver (assuming a 0 dBi receive antenna). For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:  $TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out})$  ( $P_{out}$  in mW e.i.r.p.)
- 6) The equipment shall comply with the requirements defined in step 1) to step 4) of the present clause in the presence of an unwanted CW signal as defined in table 9.

Non-LBT based Detect and Avoid:

Table 9: Unwanted Signal parameters

Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
-30	2 395 or 2 488,5 (see note 1)	-35 (see note 2)

NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.

NOTE 2: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.



LBT based Detect and Avoid:

Table 10: Unwanted Signal parameters

Wanted signal mean power from companion device	Unwanted signal frequency (MHz)	Unwanted signal power (dBm)
sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 3)


NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.

NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.

NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.

## 5.2 Test procedure

According to the section 5.4.6.2.1, the test block diagram shall be used.

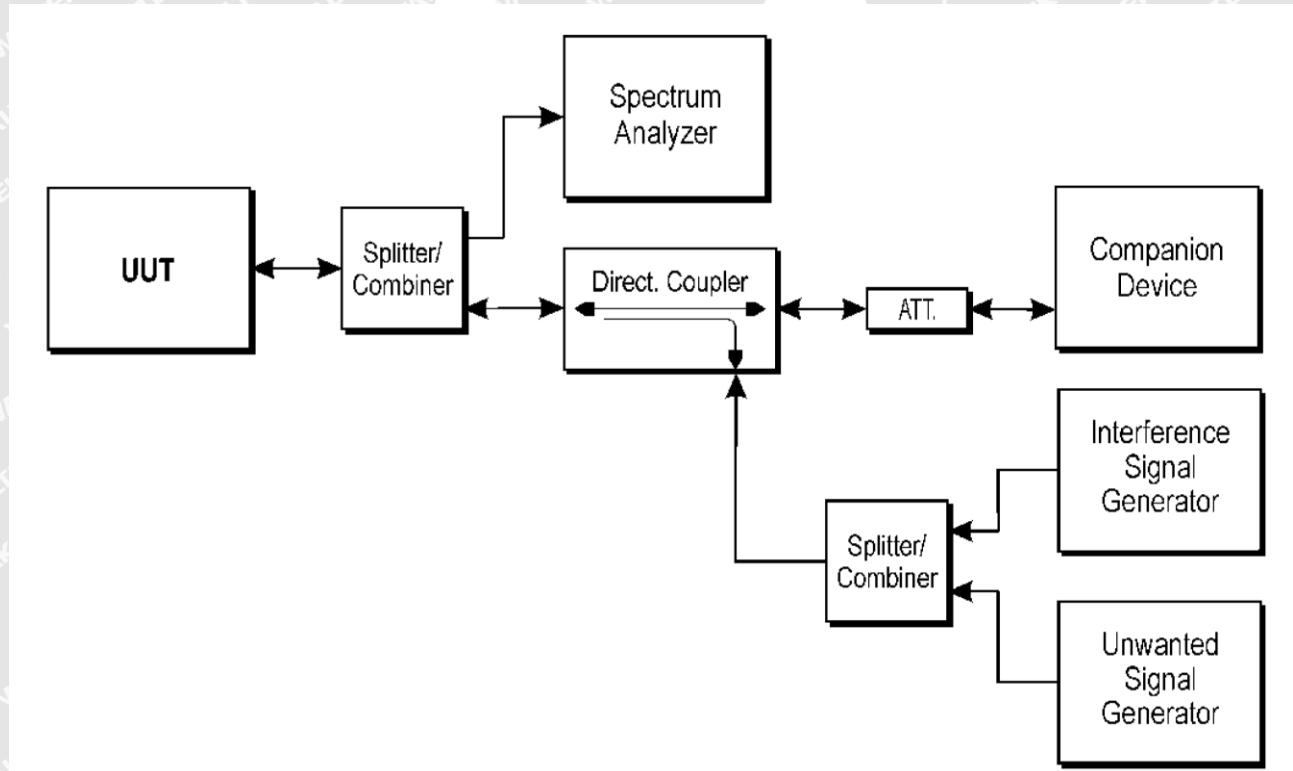

All test procedure is carried to the section 5.4.6.2.1

RBW/VBW=8MHz/30MHz

## 5.3 Summary of Test Results/Plots



**AWGN Interference Level (dBm) = -70 dBm/MHz + 10 × log10 (100 mW / Pout) (Pout in mW e.i.r.p.)**

**Antenna A:**


<b>802.11b Lowest Channel (2412MHz)</b>	
AWGN Interference Level (dBm)	-68.16
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.05
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.3
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11b Highest Channel (2472MHz)</b>	
AWGN Interference Level (dBm)	-68.53
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.13
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.31
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11g Lowest Channel (2412MHz)</b>	
AWGN Interference Level (dBm)	-65.98
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.03
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.3
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11g Highest Channel (2472MHz)</b>	
AWGN Interference Level (dBm)	-65.56
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.12
Interference Start Time (ms)	10000
Minimum Idle Time (ms)	0.13
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000

**Antenna B:**

<b>802.11b Lowest Channel (2412MHz)</b>	
AWGN Interference Level (dBm)	-68.30
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.05
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.32
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11b Highest Channel (2472MHz)</b>	
AWGN Interference Level (dBm)	-68.38
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.04
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.31
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11g Lowest Channel (2412MHz)</b>	
AWGN Interference Level (dBm)	-65.55
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.05
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.31
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11g Highest Channel (2472MHz)</b>	
AWGN Interference Level (dBm)	-65.59
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.03
Interference Start Time (ms)	10000
Minimum Idle Time (ms)	0.52
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000

**MIMO(Antenna A+ B):**


<b>802.1n-HT20 Lowest Channel (2412MHz)</b>	
AWGN Interference Level (dBm)	-67.44
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.03
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.3
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11n-HT20 highest Channel (2472MHz)</b>	
AWGN Interference Level (dBm)	-67.16
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.04
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.31
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11n-HT40 Lowest Channel (2422MHz)</b>	
AWGN Interference Level (dBm)	-67.12
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.04
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.66
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000
<b>802.11n-HT40 Highest Channel (2462MHz)</b>	
AWGN Interference Level (dBm)	-67.46
Block Signal Level (dBm)	-35.00
Max COT Time (ms)	0.04
Interference Start Time (ms)	10000
Min Idle Time (ms)	0.56
Duty Cycle (%)	0
Pulse Width (ms)	0
Block Signal Inject time(ms)	70000

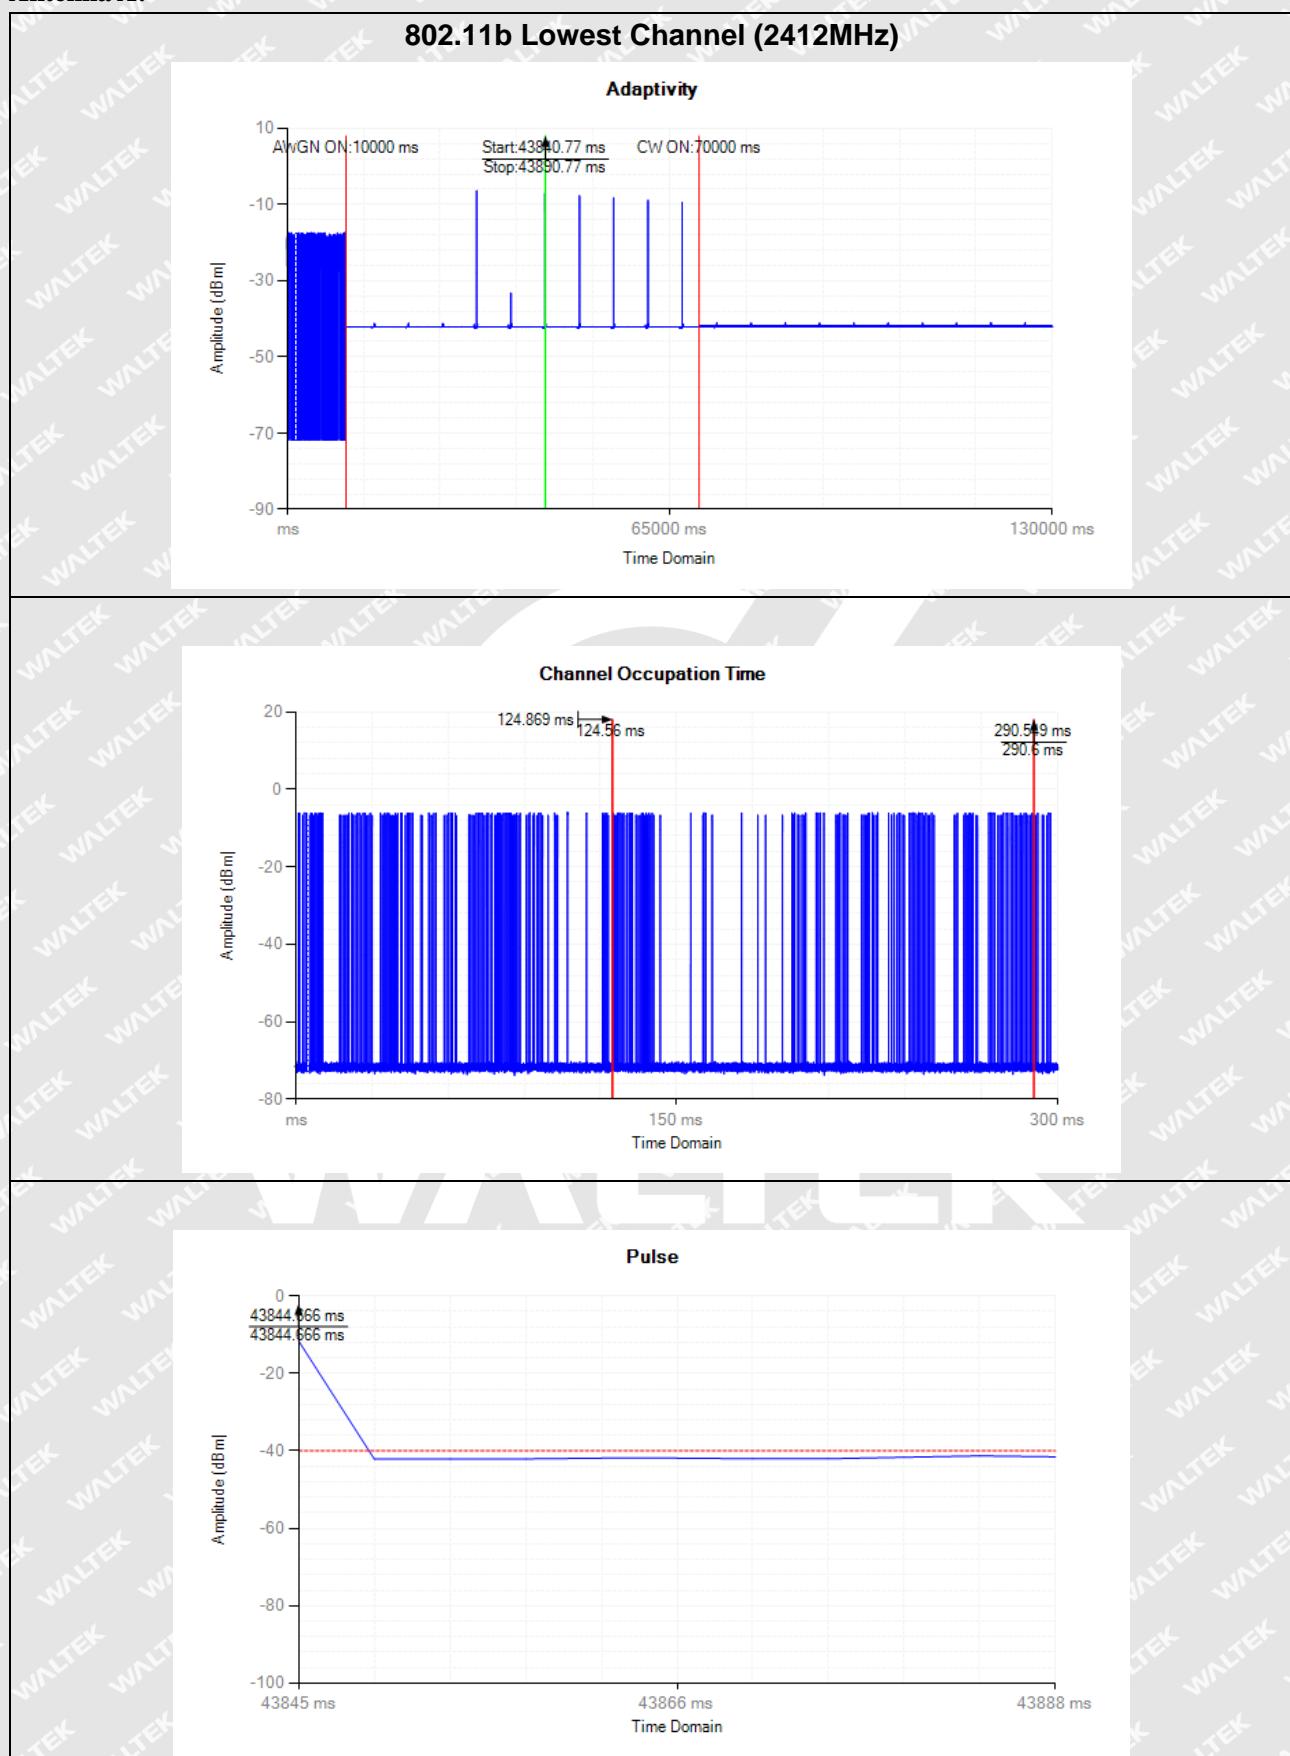**Antenna A:**




### Highest Channel (2472MHz)


#### Adaptivity



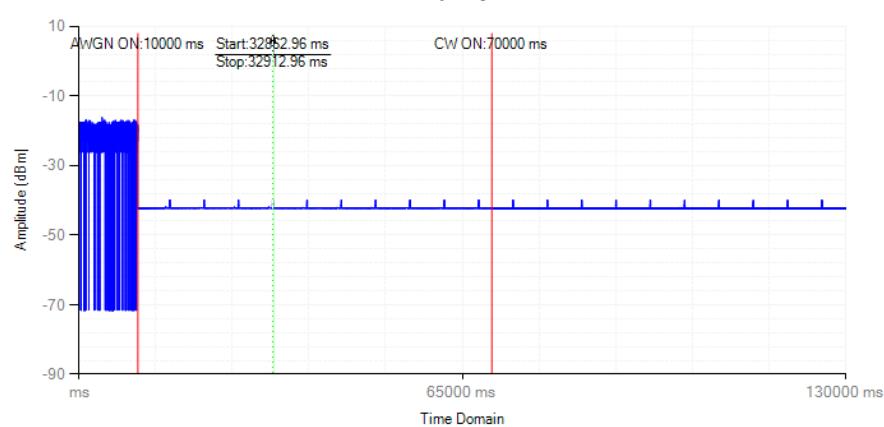





#### Channel Occupation Time



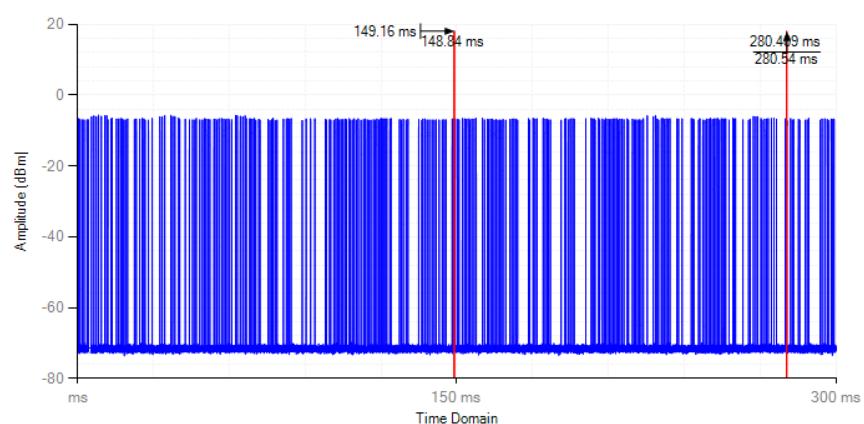


#### Pulse

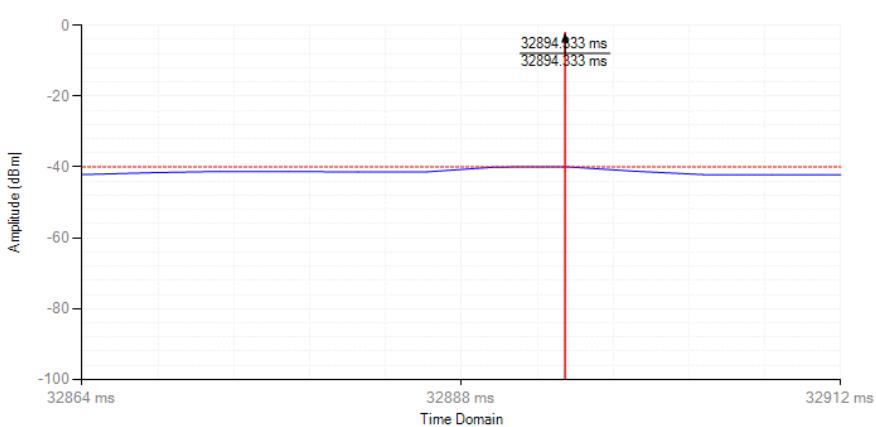

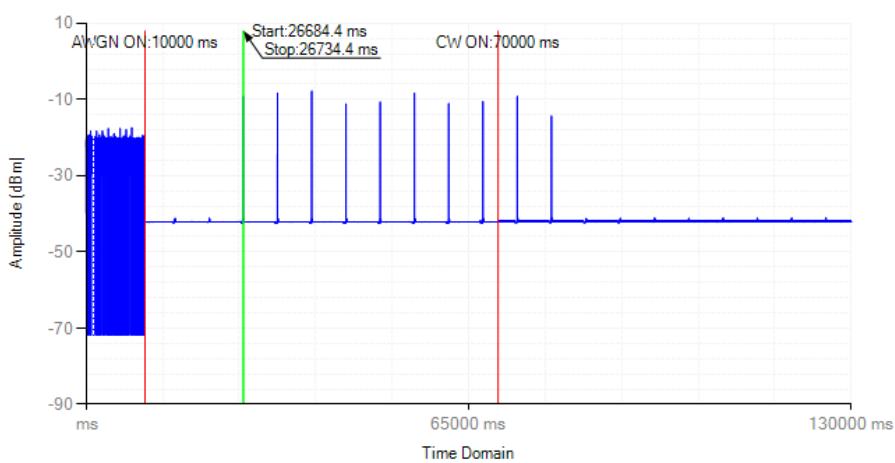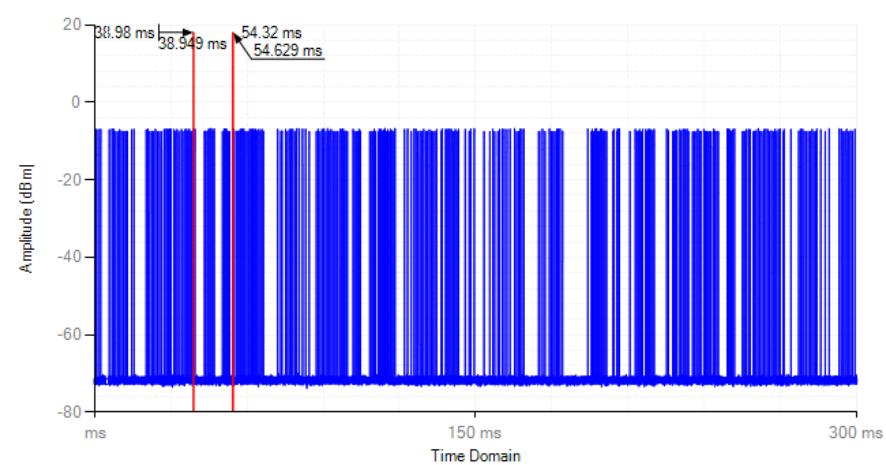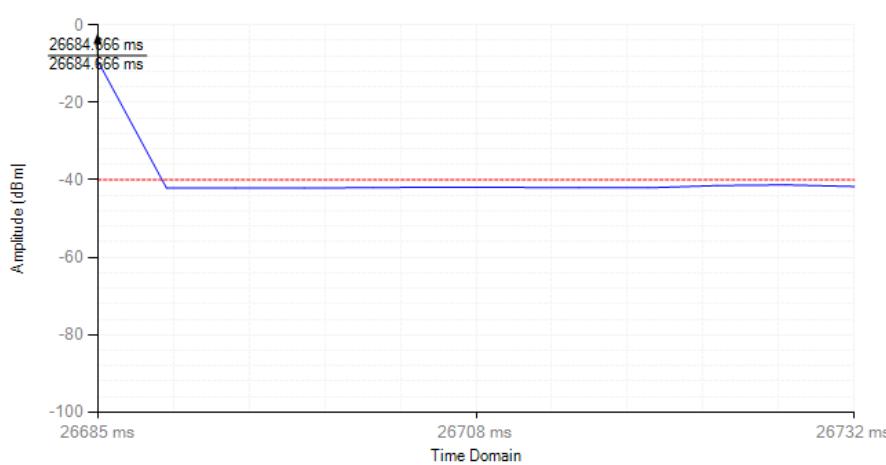**802.11g Lowest Channel (2412MHz)****Adaptivity****Channel Occupation Time****Pulse**

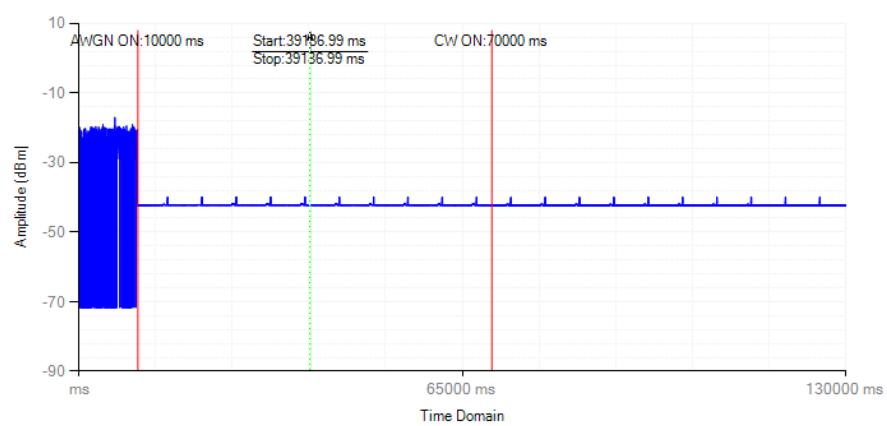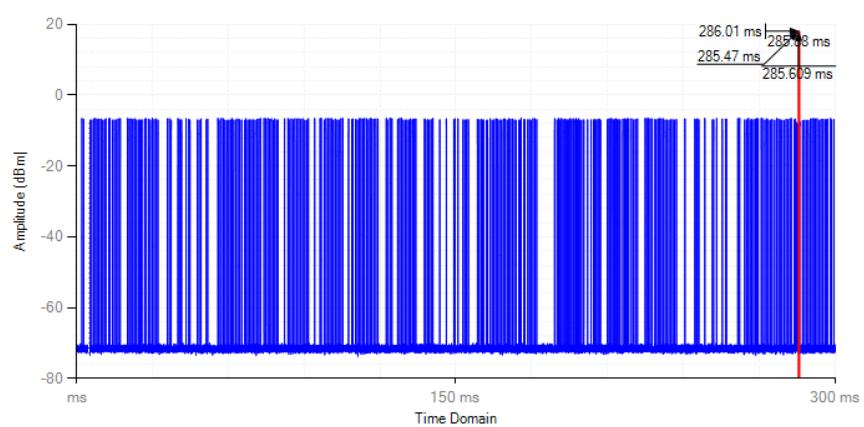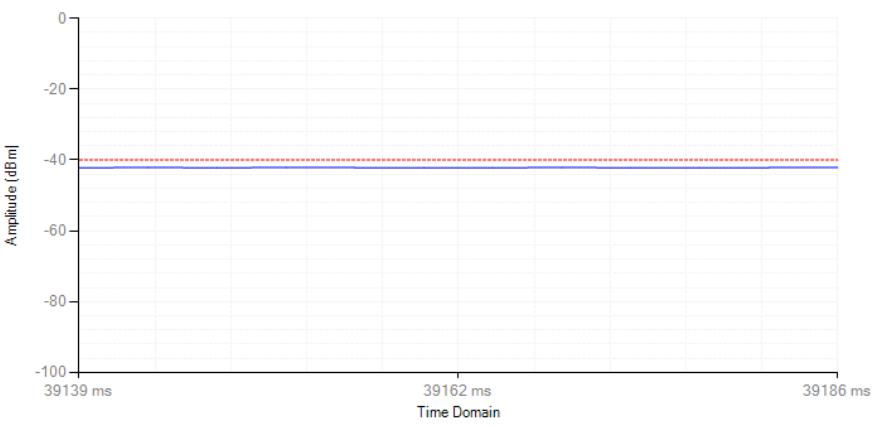
**802.11g Highest Channel (2472MHz)****Adaptivity****Channel Occupation Time****Pulse**

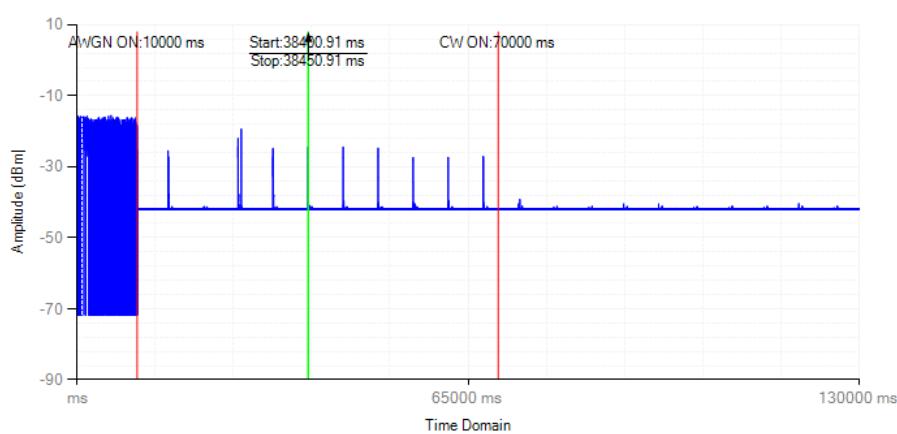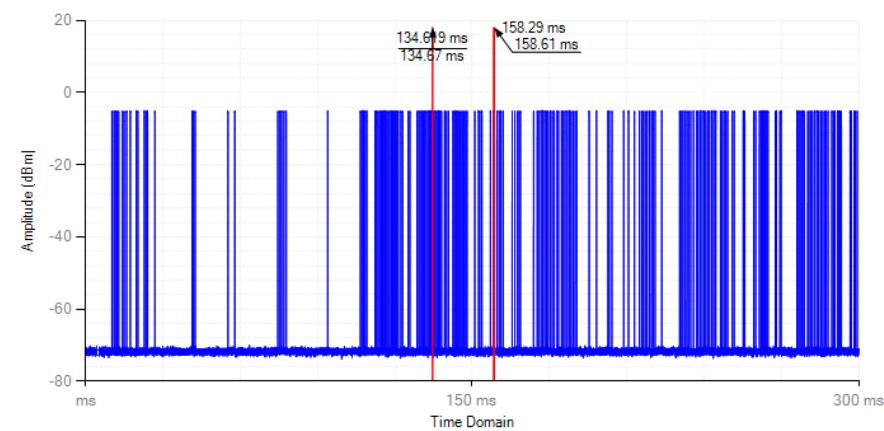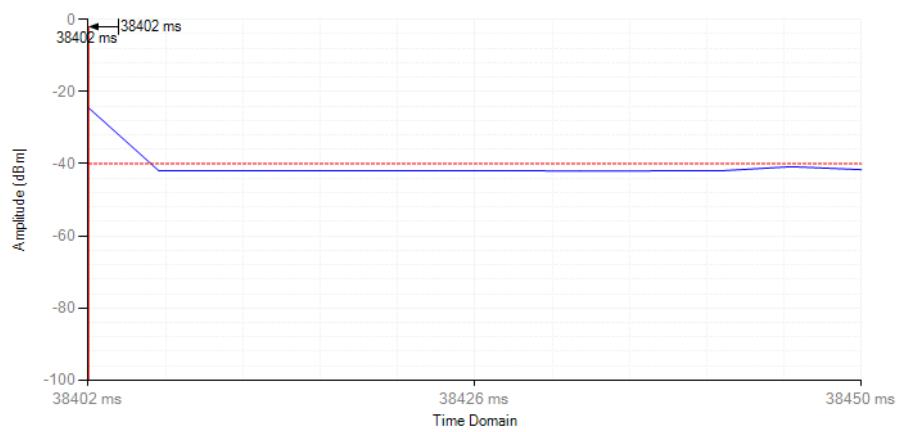**Antenna B:****802.11b Lowest Channel (2412MHz)****Adaptivity****Channel Occupation Time****Pulse**




### Highest Channel (2472MHz)


#### Adaptivity

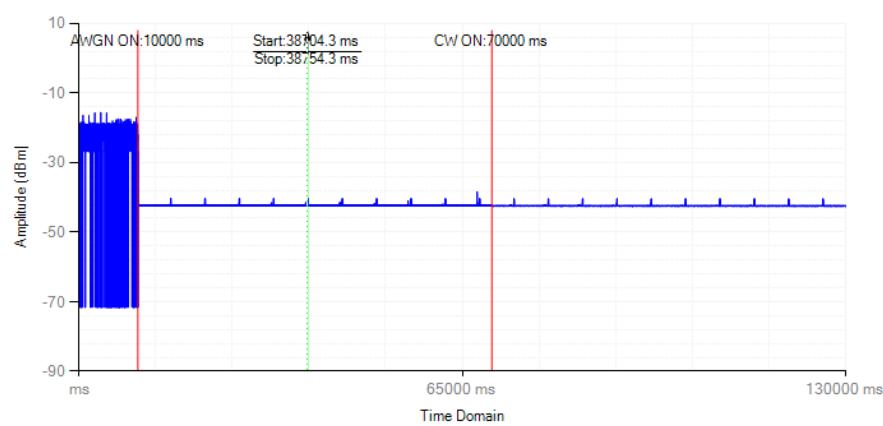

#### Channel Occupation Time

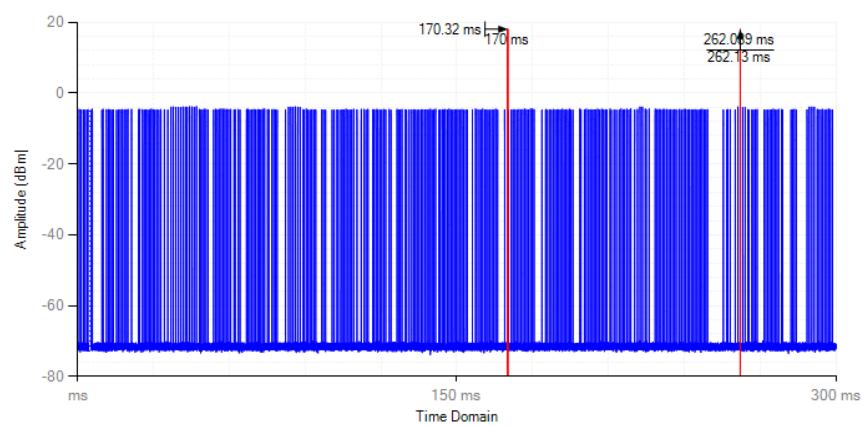


#### Pulse

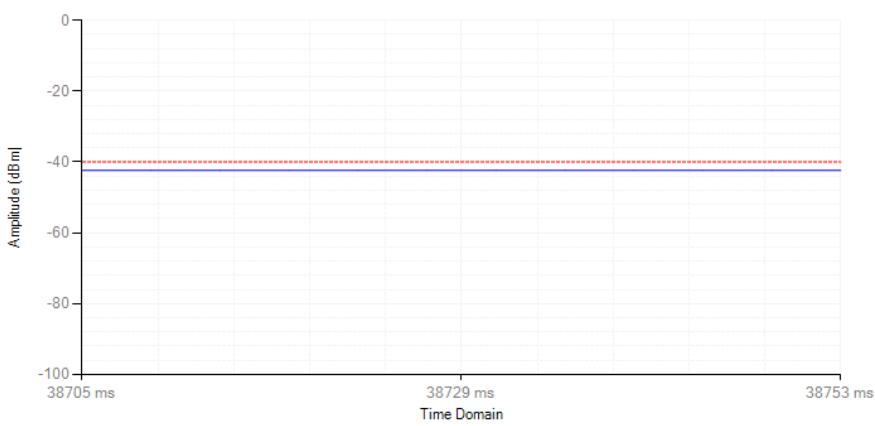




### 802.11g Lowest Channel (2412MHz)


#### Adaptivity



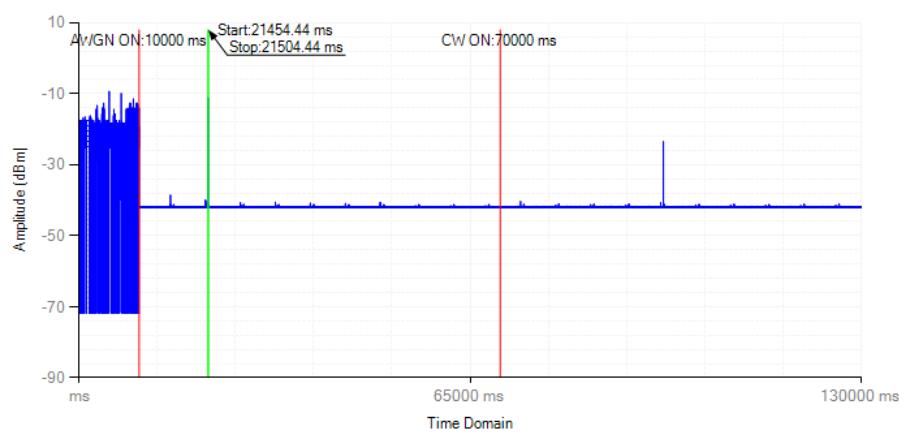



#### Channel Occupation Time

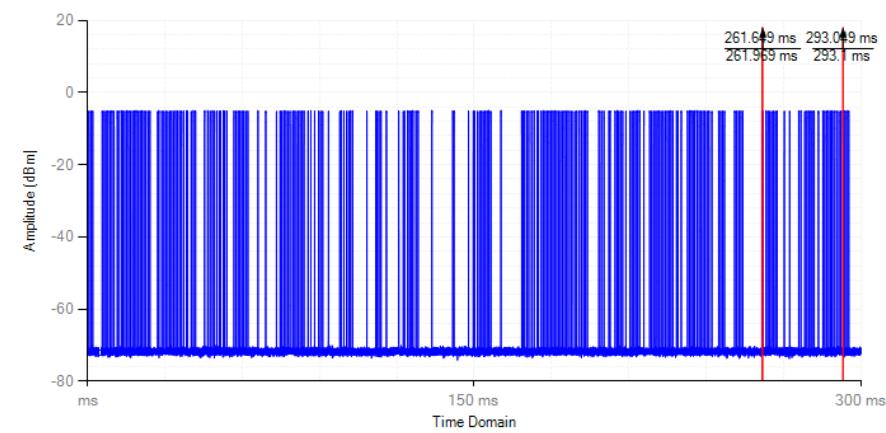



#### Pulse

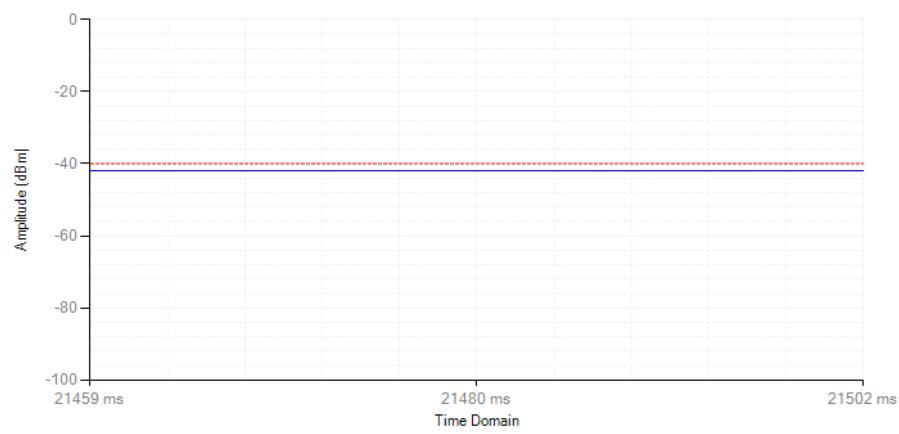


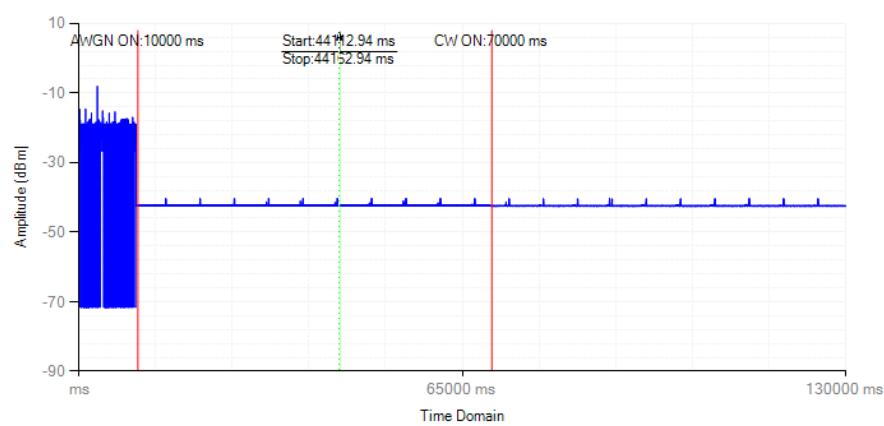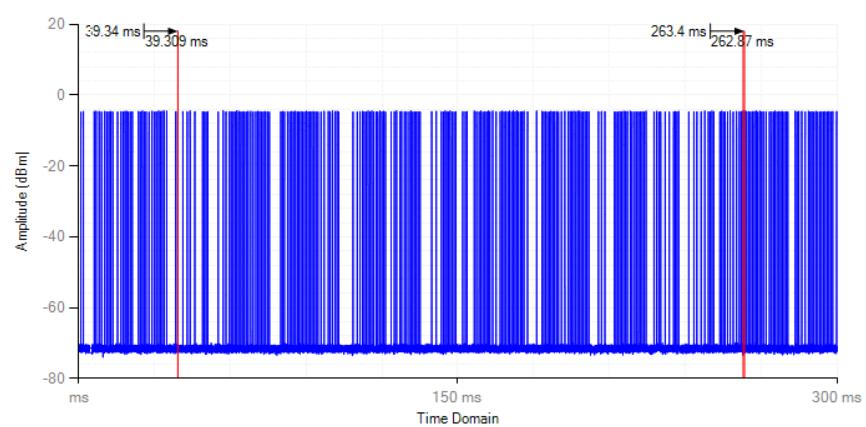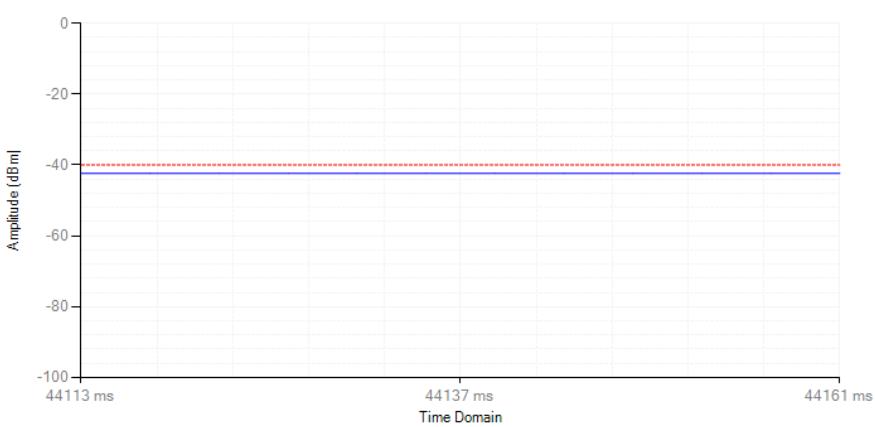**802.11g Highest Channel (2472MHz)****Adaptivity****Channel Occupation Time****Pulse**

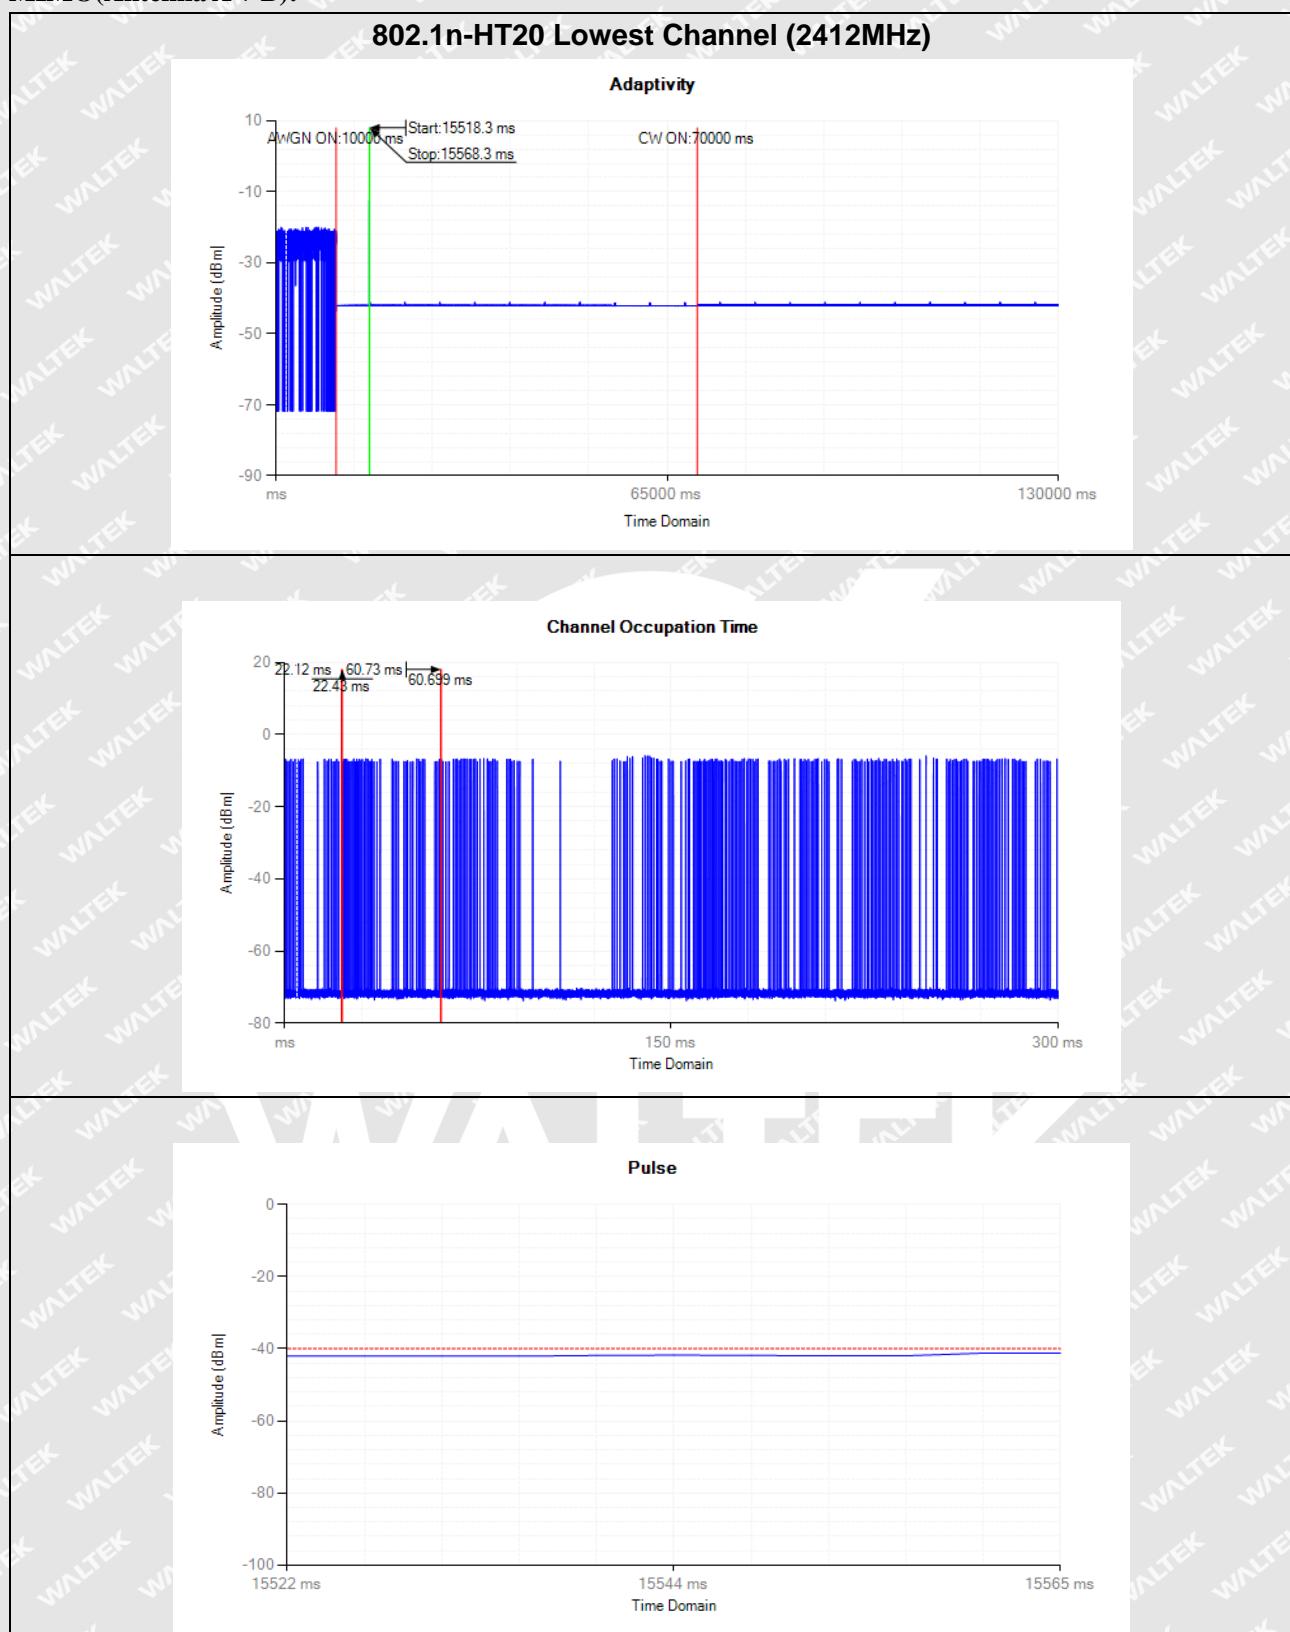**MIMO(Antenna A + B):**

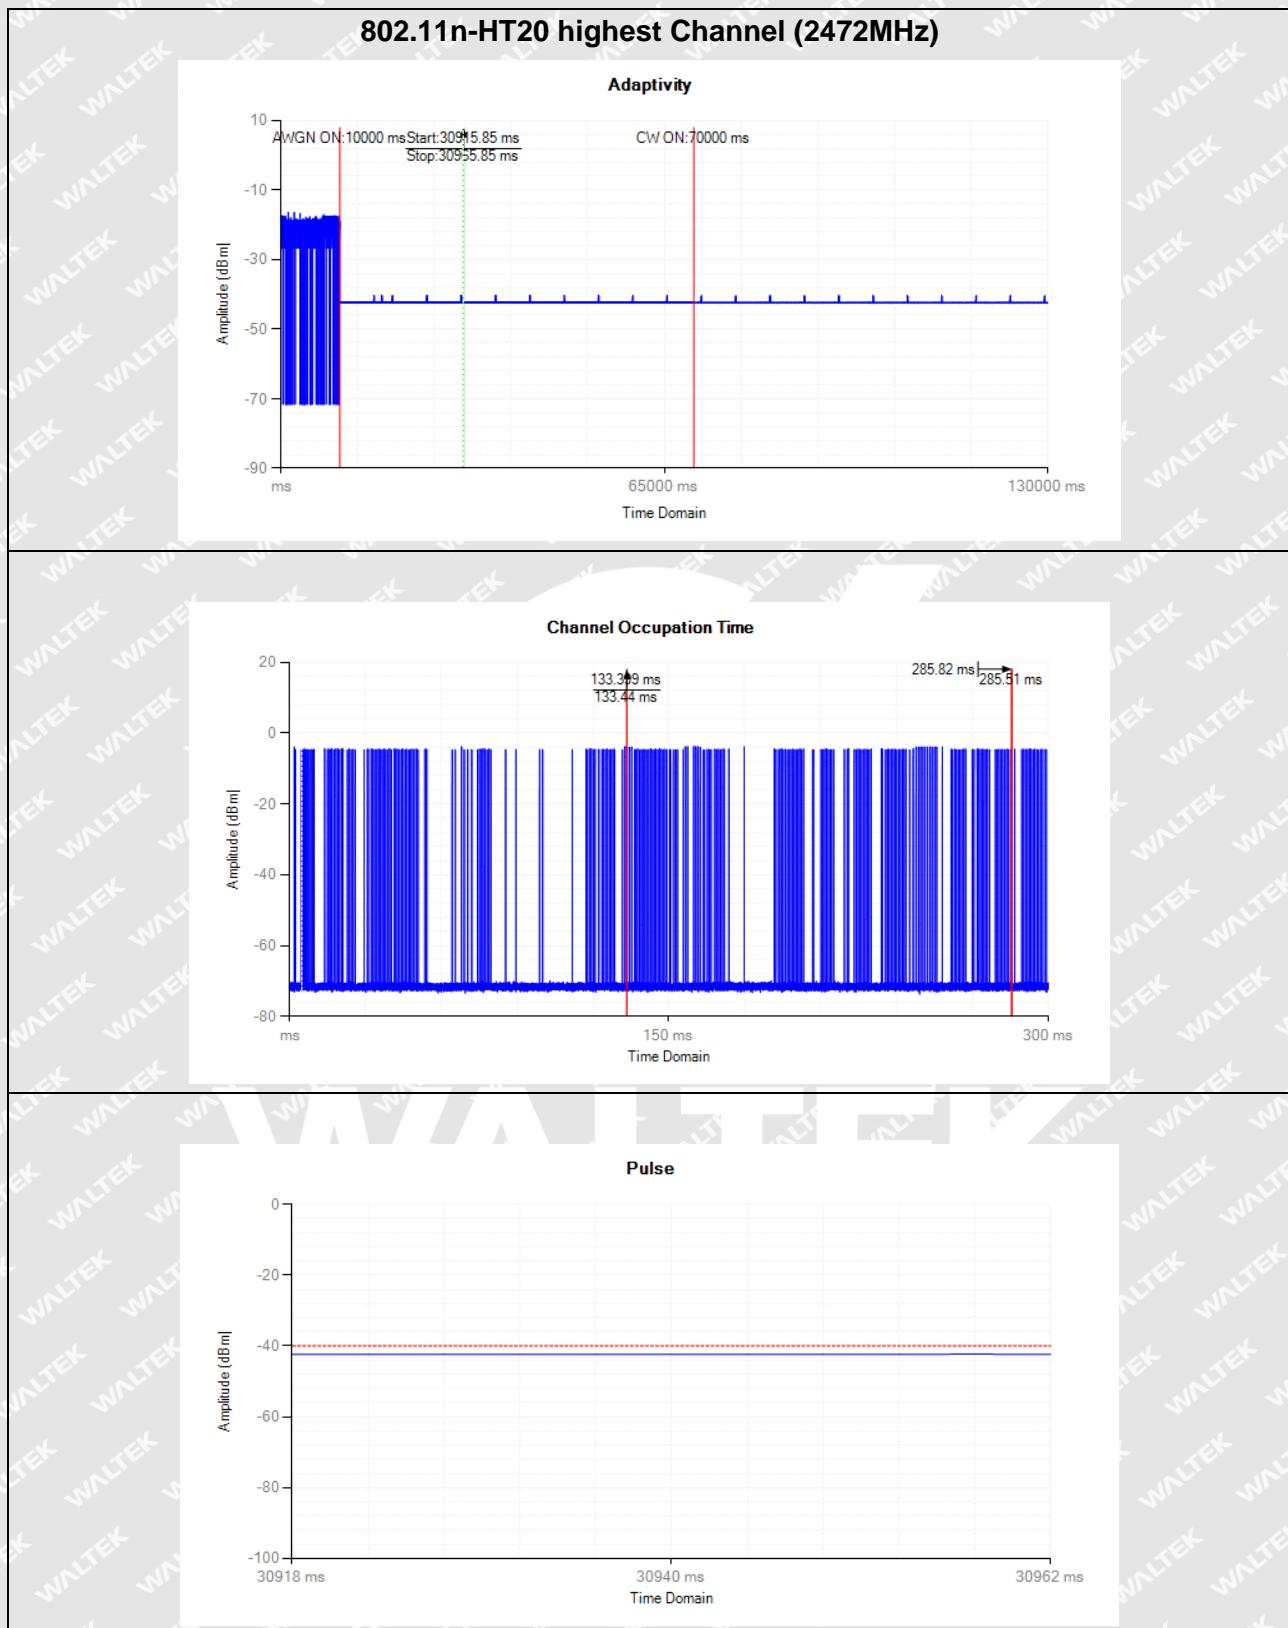

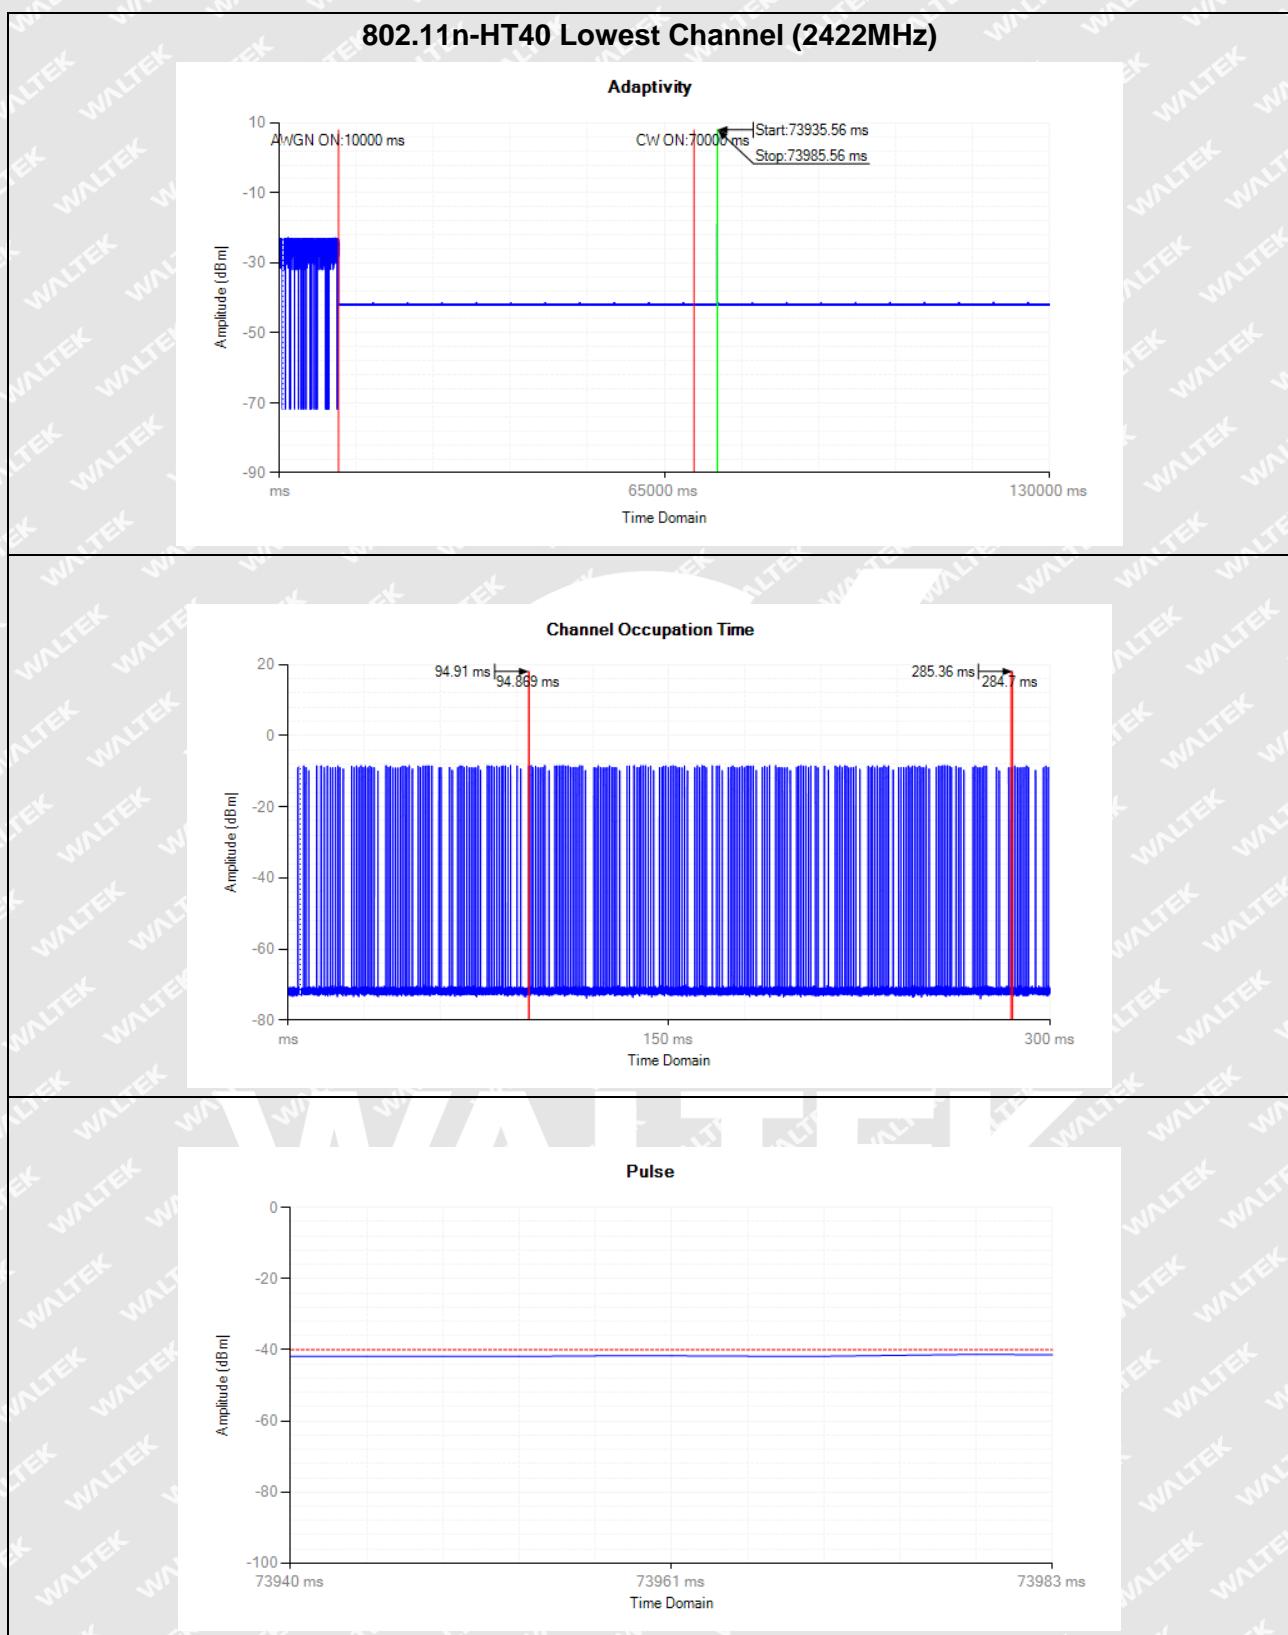

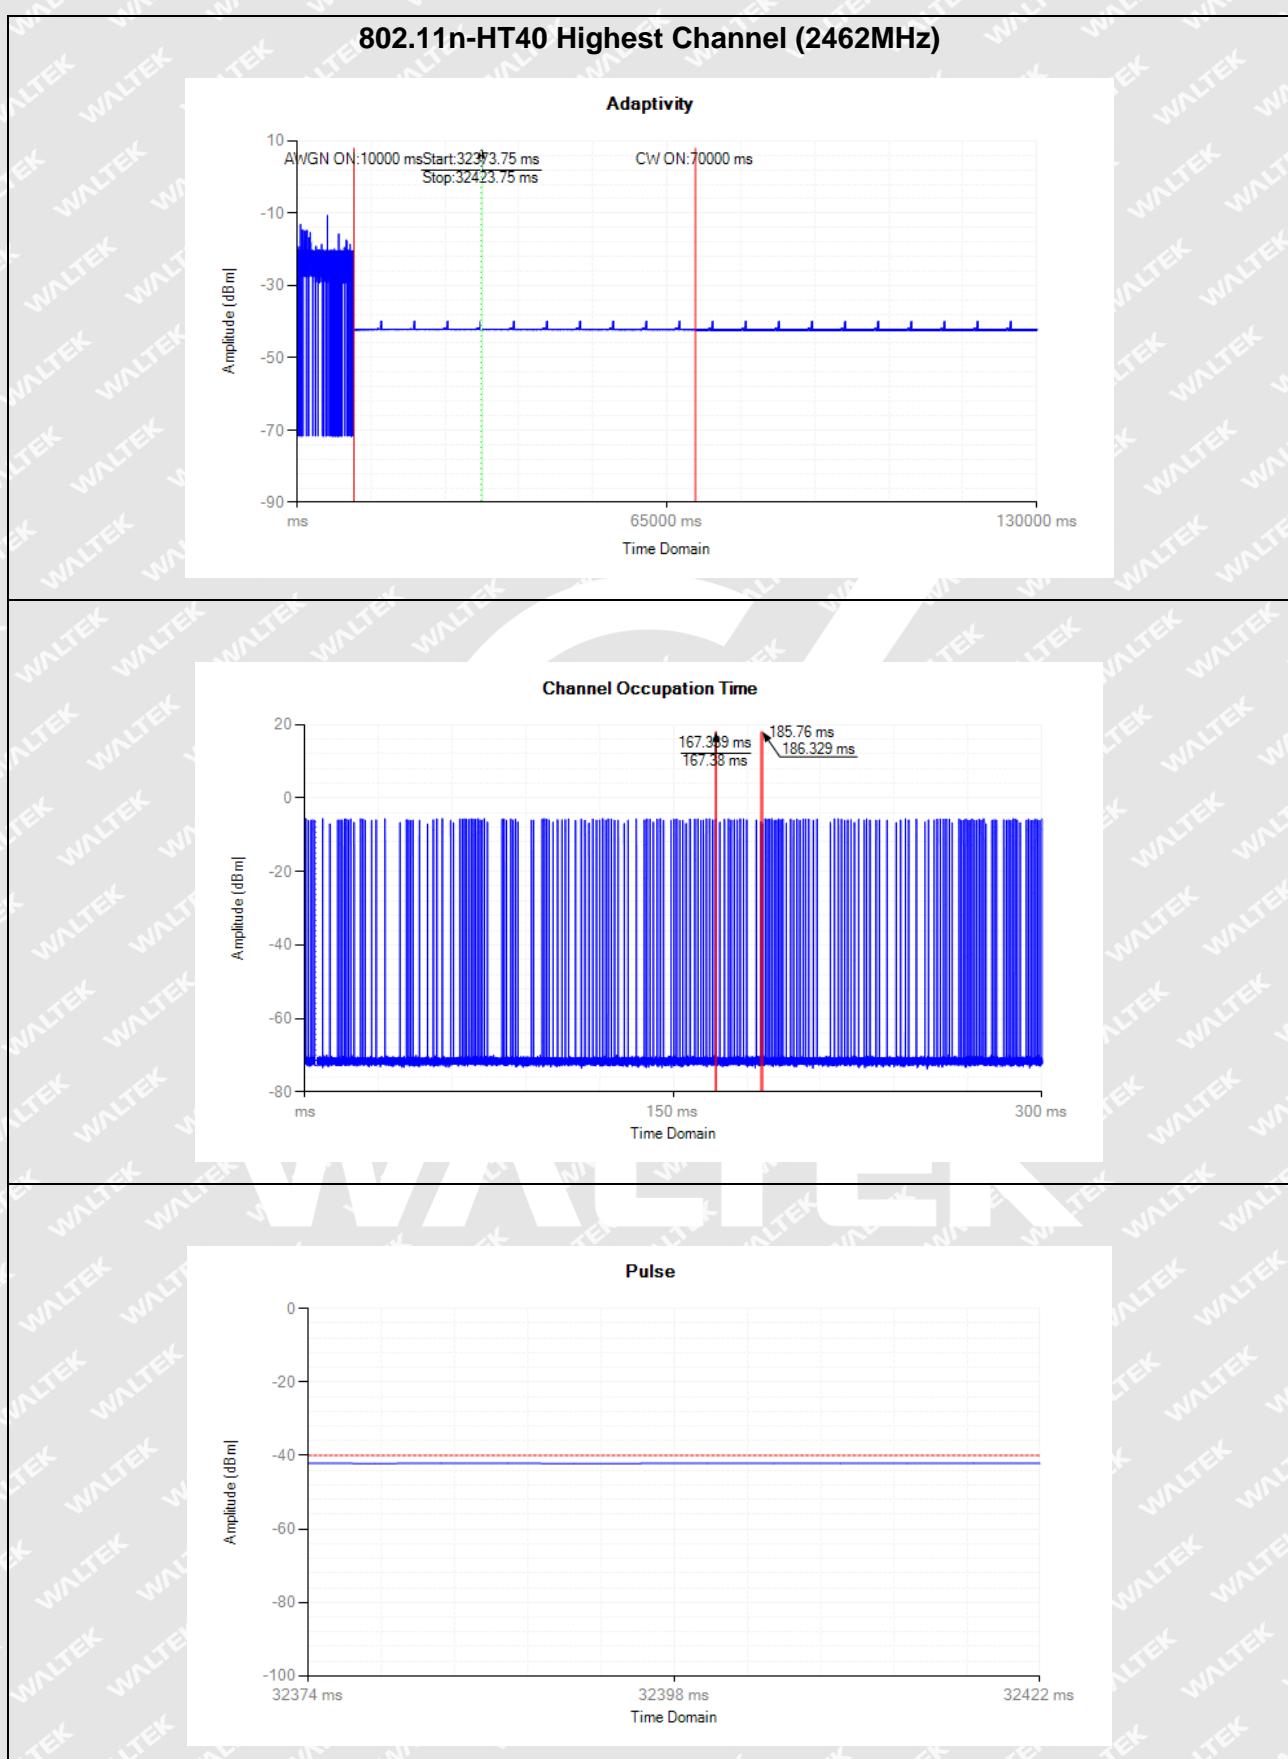



## 6. Occupied Channel Bandwidth

### 6.1 Standard Application

According to section 4.3.2.7.3, the Occupied Channel Bandwidth shall fall completely within the band given in clause 1. In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

### 6.2 Test procedure

According to the section 5.4.7.2.1, the measurement procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW:  $3 \times \text{RBW}$
- Frequency Span:  $2 \times \text{Occupied Channel Bandwidth}$
- Detector Mode: RMS
- Trace Mode: Max Hold

Step 2:

Wait until the trace is completed.

Find the peak value of the trace and place the analyser marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

### 6.3 Summary of Test Results/Plots

**Antenna A:**


Mode	Channel	Measured Frequency (MHz)		Limit (MHz)	Result
		Low	High		
802.11b	Low	2404.465	2419.475	2400.00~2483.50	Pass
	High	2464.48	2479.46		
802.11g	Low	2403.55	2420.27	2400.00~2483.50	Pass
	High	2463.55	2480.27		


**Antenna B:**


Mode	Channel	Measured Frequency (MHz)		Limit (MHz)	Result
		Low	High		
802.11b	Low	2404.445	2419.455	2400.00~2483.50	Pass
	High	2464.415	2479.465		
802.11g	Low	2403.555	2420.265	2400.00~2483.50	Pass
	High	2463.545	2480.275		


**MIMO(Antenna A + B):**


Mode	Channel	Measured Frequency (MHz)		Limit (MHz)	Result
		Low	High		
802.11n HT20	Low	2403.185	2420.735	2400.00~2483.50	Pass
	High	2463.195	2480.725		
802.11n HT40	Low	2403.965	2440.035	2400.00~2483.50	Pass
	High	2443.96	2480.02		

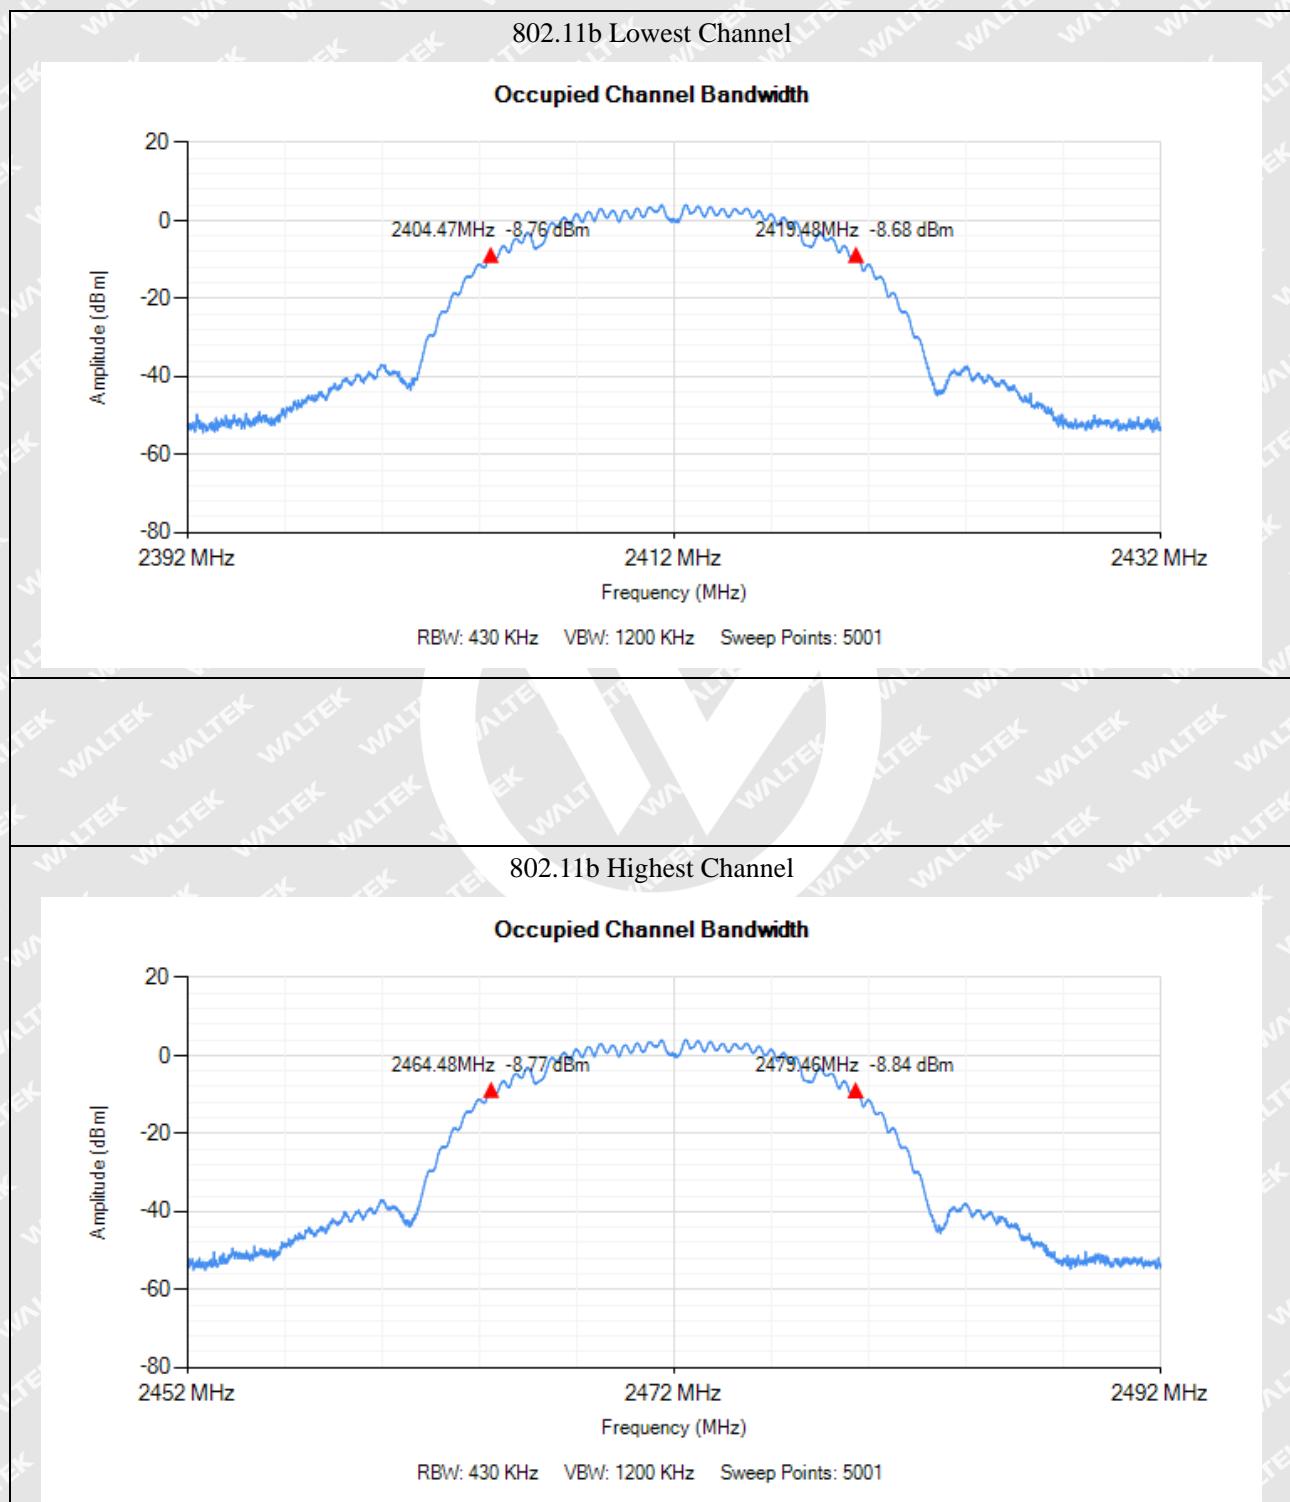**Antenna A**

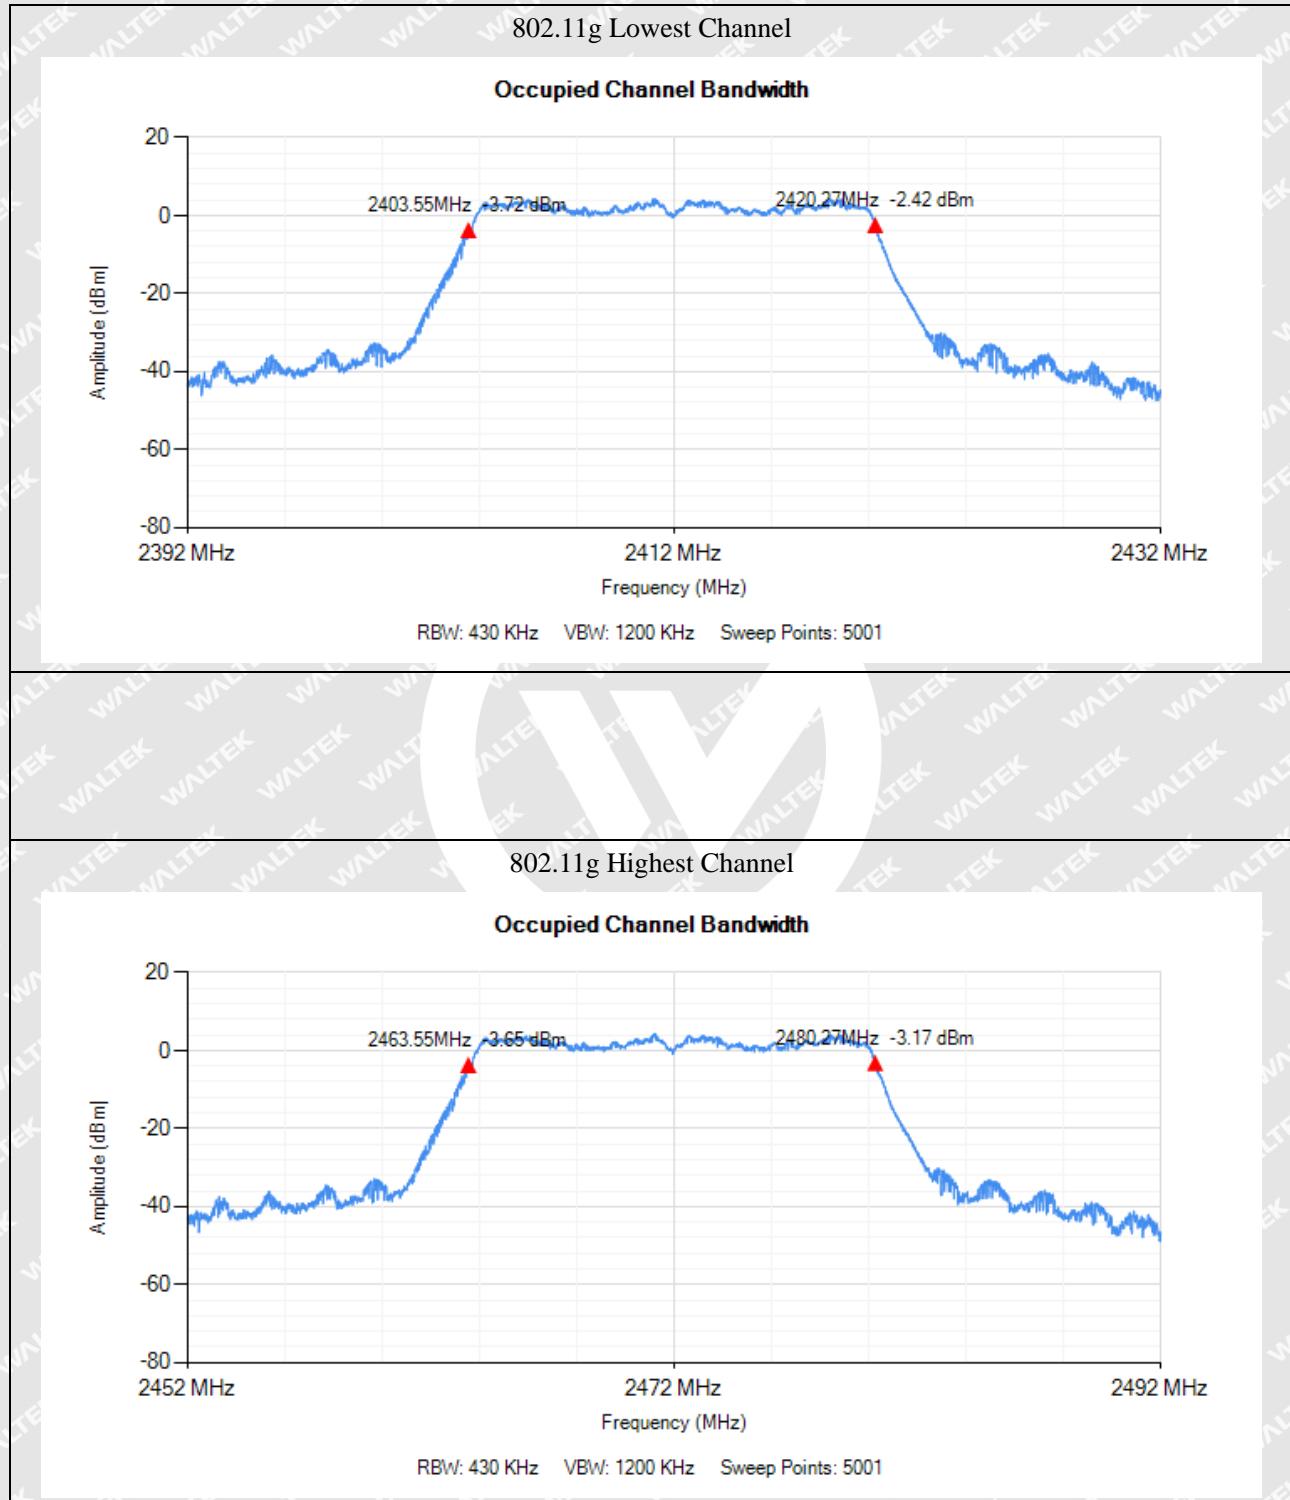

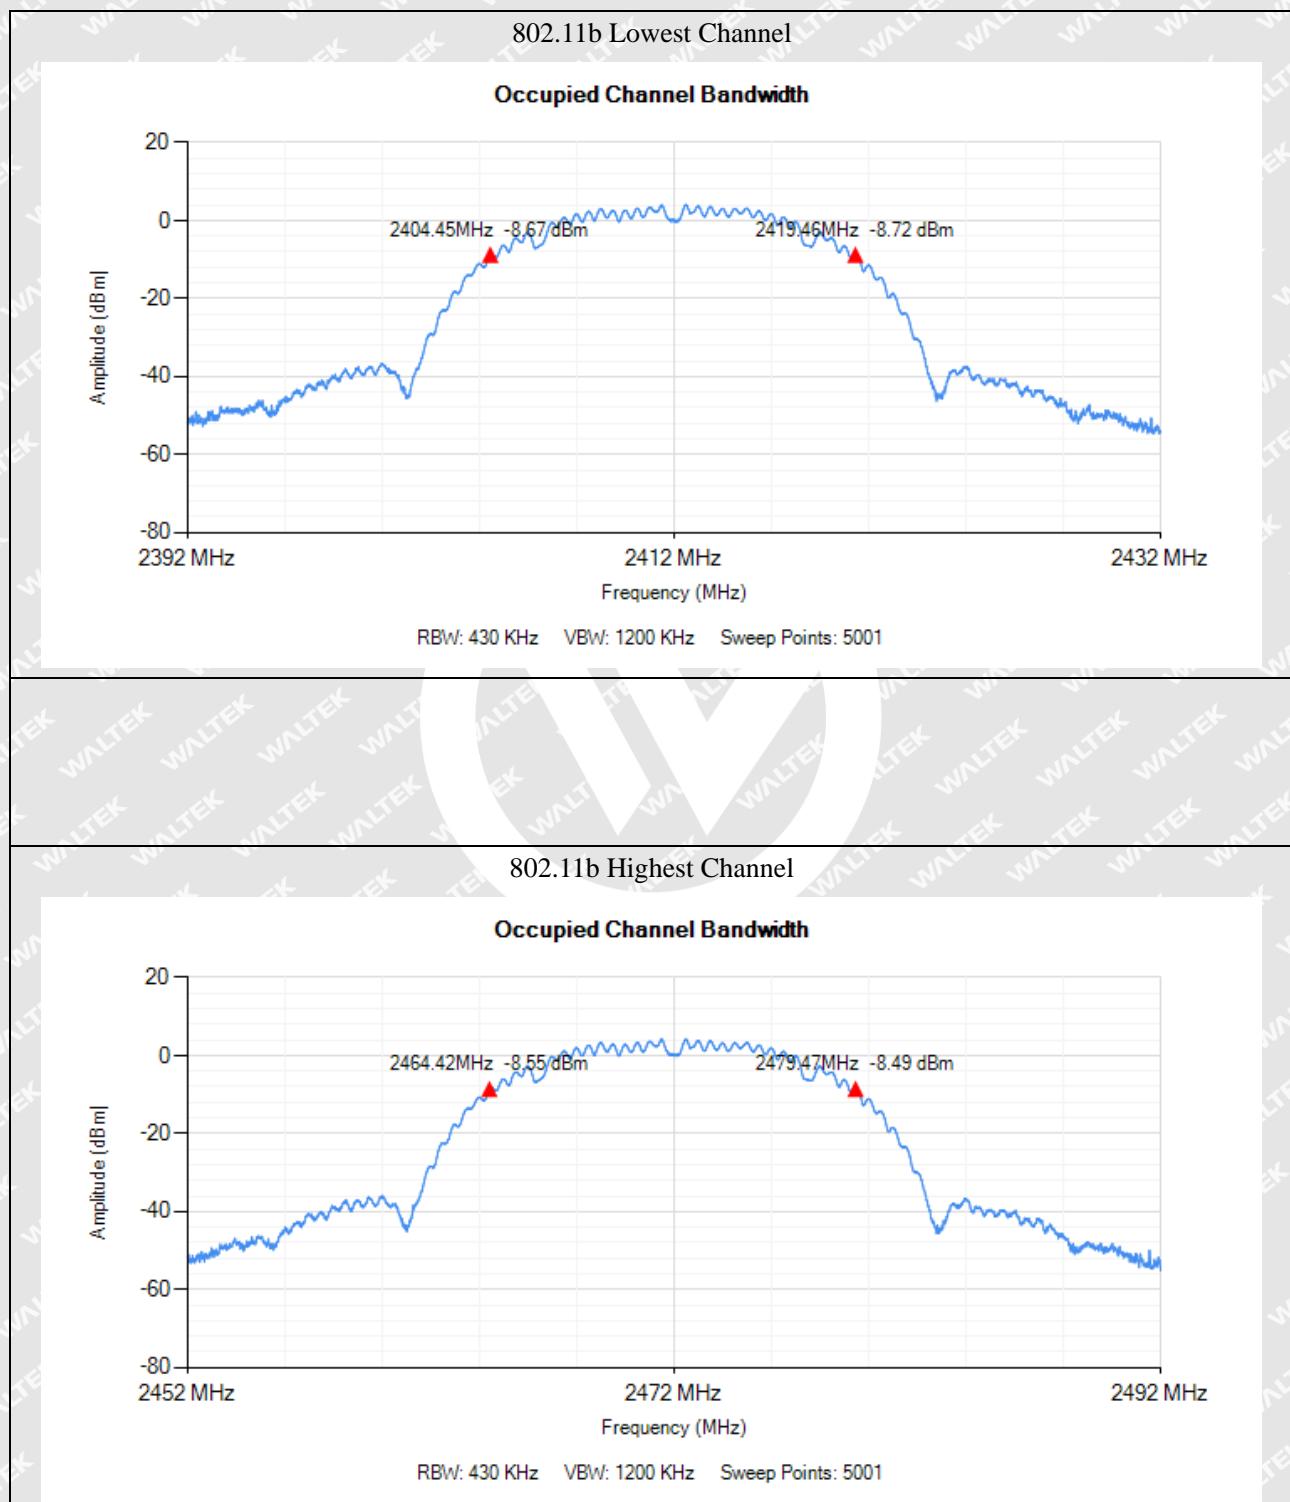**Antenna B**

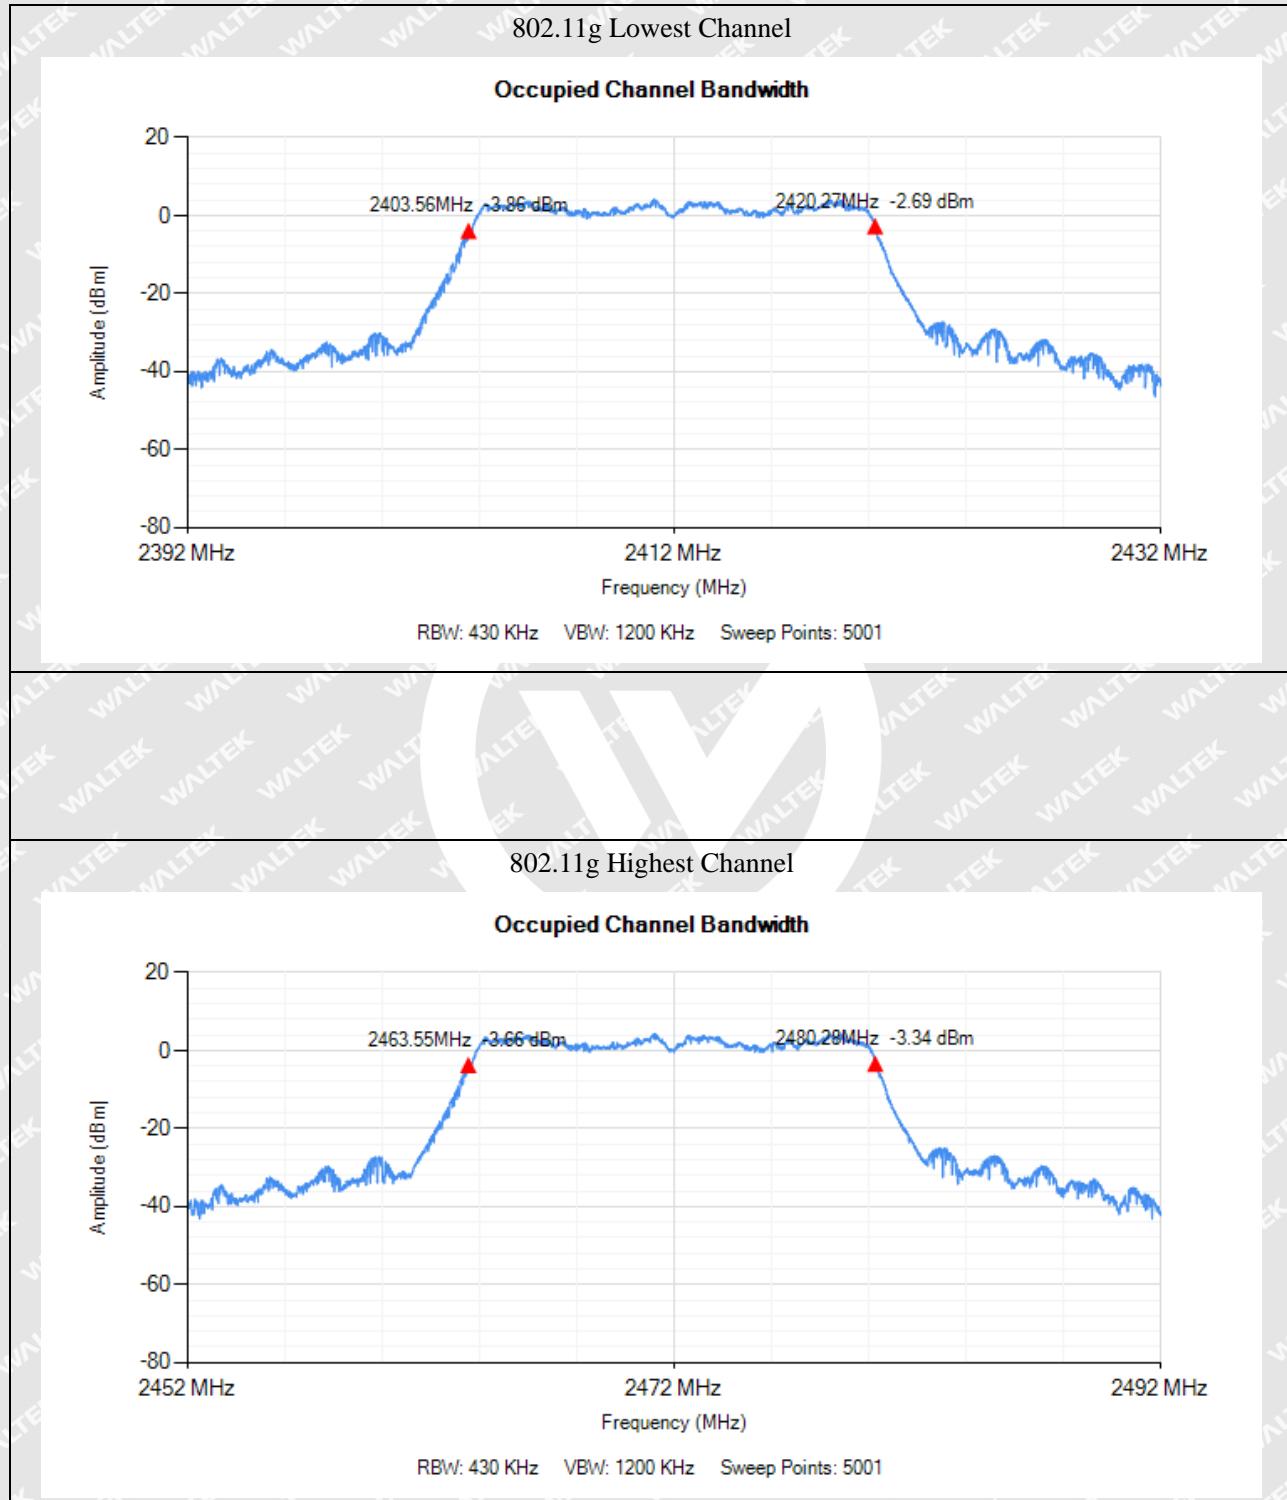


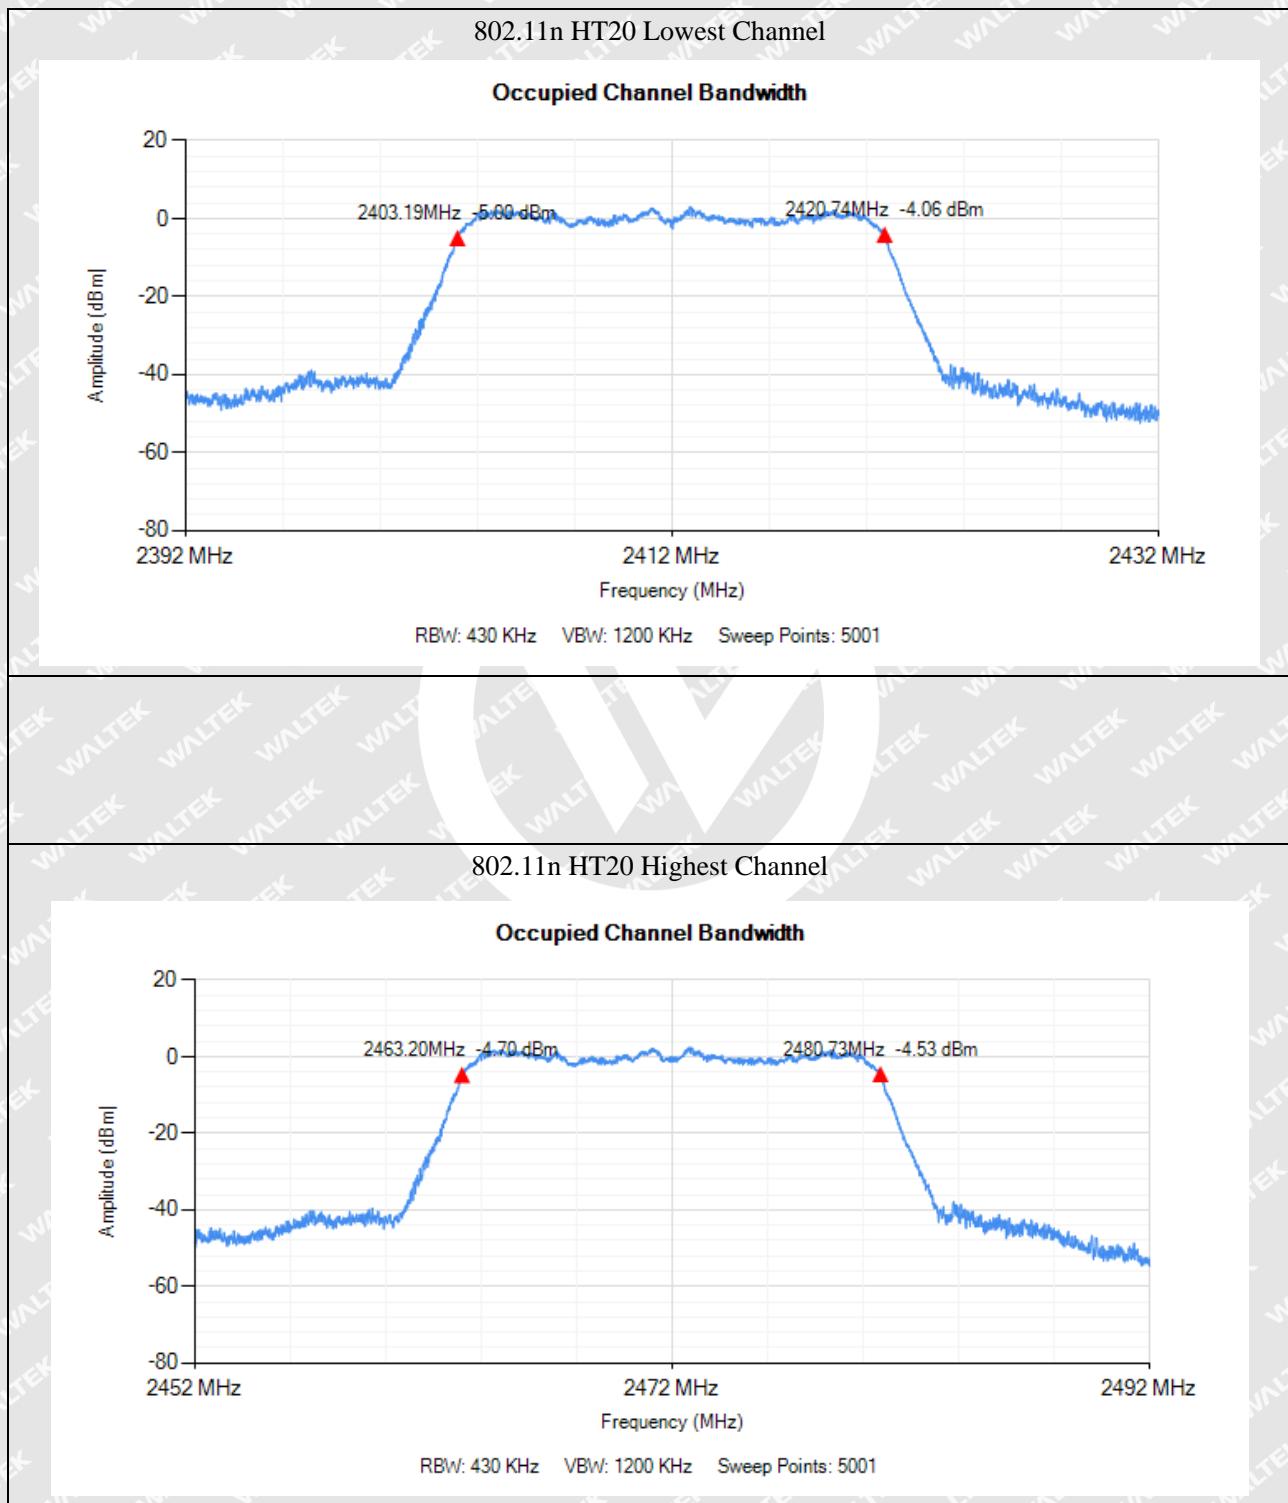**MIMO(Antenna A + B):**




## 802.11n HT40 Lowest Channel

## Occupied Channel Bandwidth

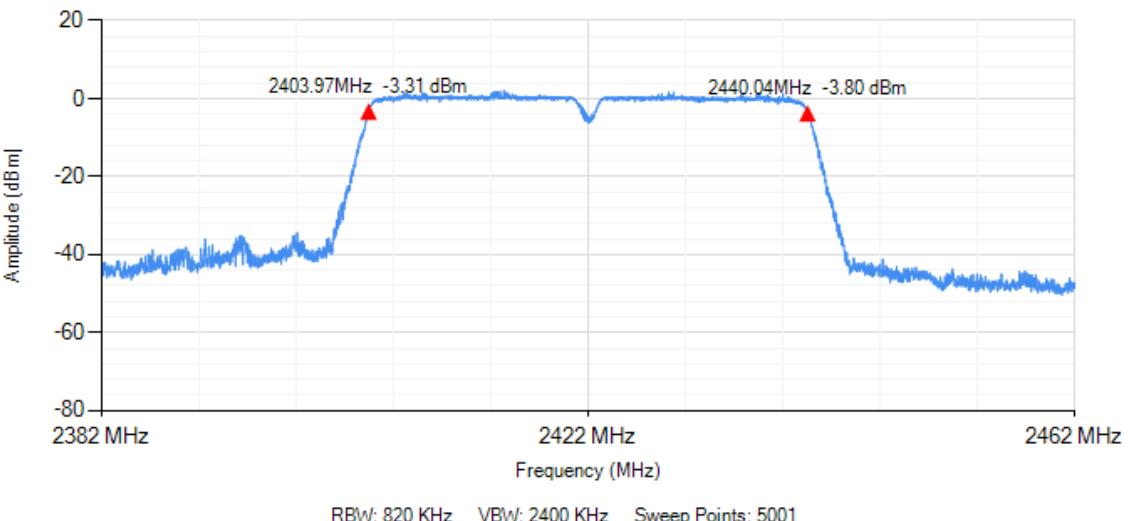

## 802.11n HT40 Highest Channel

## Occupied Channel Bandwidth

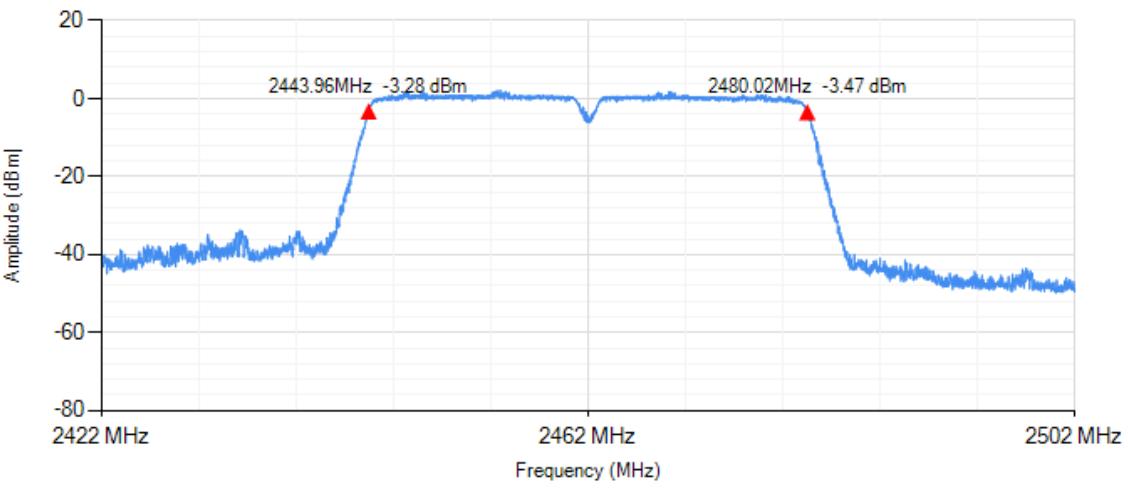




## 7. Transmitter Unwanted Emissions in the Out-of-band Domain

### 7.1 Standard Application

According to section 4.3.2.8.3, the transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.

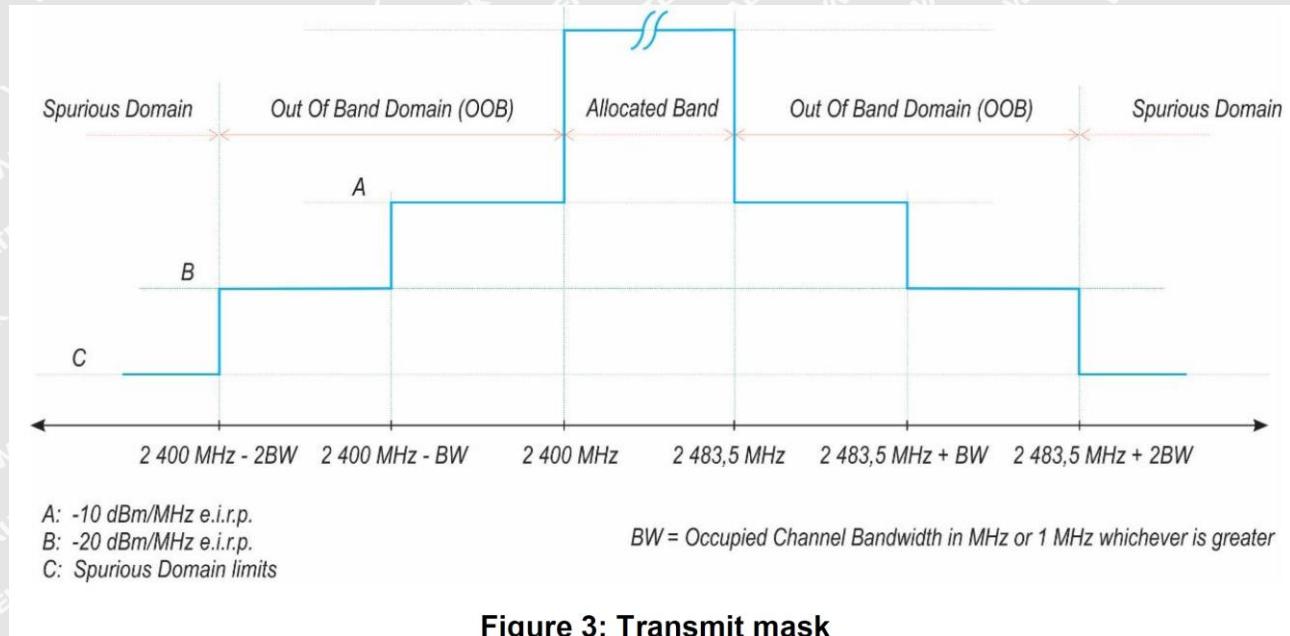

**Figure 3: Transmit mask**

### 7.2 Test procedure

According to the section 5.4.8.2.1, the measurement procedure shall be as follows:

The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

#### Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:
  - Centre Frequency: 2 484 MHz
  - Span: 0 Hz
  - Resolution BW: 1 MHz
  - Filter mode: Channel filter
  - Video BW: 3 MHz
  - Detector Mode: RMS
  - Trace Mode: Clear / Write
  - Sweep Mode: Continuous
  - Sweep Points: 5 000
  - Trigger Mode: Video trigger



- Sweep Time: Suitable to capture one transmission burst

Step 2: (segment 2 483,5 MHz to 2 483,5 MHz + BW)

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3: (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW)

- Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz.

Step 4: (segment 2 400 MHz - BW to 2 400 MHz)

- Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.

Step 5: (segment 2 400 MHz - 2BW to 2 400 MHz - BW)

- Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figures 1 or 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.

These measurements have to be performed at normal environmental conditions and shall be repeated at the extremes of the operating temperature range.

RBW/VBW=1MHz/3MHz



### 7.3 Summary of Test Results/Plots

#### Antenna A

Test CH.	Test Segment	Max. Emissions Reading (dBm)	Limit
	MHz	Normal	dBm
<b>Test Mode: 802.11b</b>			
Lowest	2400-BW to 2400	-34.971	-10
	2400-2BW to 2400-BW	-50.468	-20
Highest	2483.5 to 2483.5+BW	-34.659	-10
	2483.5+BW to 2483.5+2BW	-51.599	-20
<b>Test Mode: 802.11g</b>			
Lowest	2400-BW to 2400	-35.921	-10
	2400-2BW to 2400-BW	-48.318	-20
Highest	2483.5 to 2483.5+BW	-37.349	-10
	2483.5+BW to 2483.5+2BW	-50.759	-20

Note 1: BW please refer to section 6.3

Note 2: the data just list the worst cases

#### Antenna B

Test CH.	Test Segment	Max. Emissions Reading (dBm)	Limit
	MHz	Normal	dBm
<b>Test Mode: 802.11b</b>			
Lowest	2400-BW to 2400	-33.781	-10
	2400-2BW to 2400-BW	-50.598	-20
Highest	2483.5 to 2483.5+BW	-33.519	-10
	2483.5+BW to 2483.5+2BW	-51.879	-20
<b>Test Mode: 802.11g</b>			
Lowest	2400-BW to 2400	-33.831	-10
	2400-2BW to 2400-BW	-49.848	-20
Highest	2483.5 to 2483.5+BW	-31.449	-10
	2483.5+BW to 2483.5+2BW	-50.639	-20

Note 1: BW please refer to section 6.3


Note 2: the data just list the worst cases

**MIMO(Antenna A+ B):**

Test CH.	Test Segment	Max. Emissions Reading (dBm)	Limit
	MHz	Normal	dBm
<b>Test Mode: 802.11b</b>			
Lowest	2400-BW to 2400	-40.201	-10
	2400-2BW to 2400-BW	-48.498	-20
Highest	2483.5 to 2483.5+BW	-42.319	-10
	2483.5+BW to 2483.5+2BW	-51.909	-20
<b>Test Mode: 802.11g</b>			
Lowest	2400-BW to 2400	-40.261	-10
	2400-2BW to 2400-BW	-51.228	-20
Highest	2483.5 to 2483.5+BW	-42.339	-10
	2483.5+BW to 2483.5+2BW	-51.802	-20

Note 1: BW please refer to section 6.3


Note 2: the data just list the worst cases

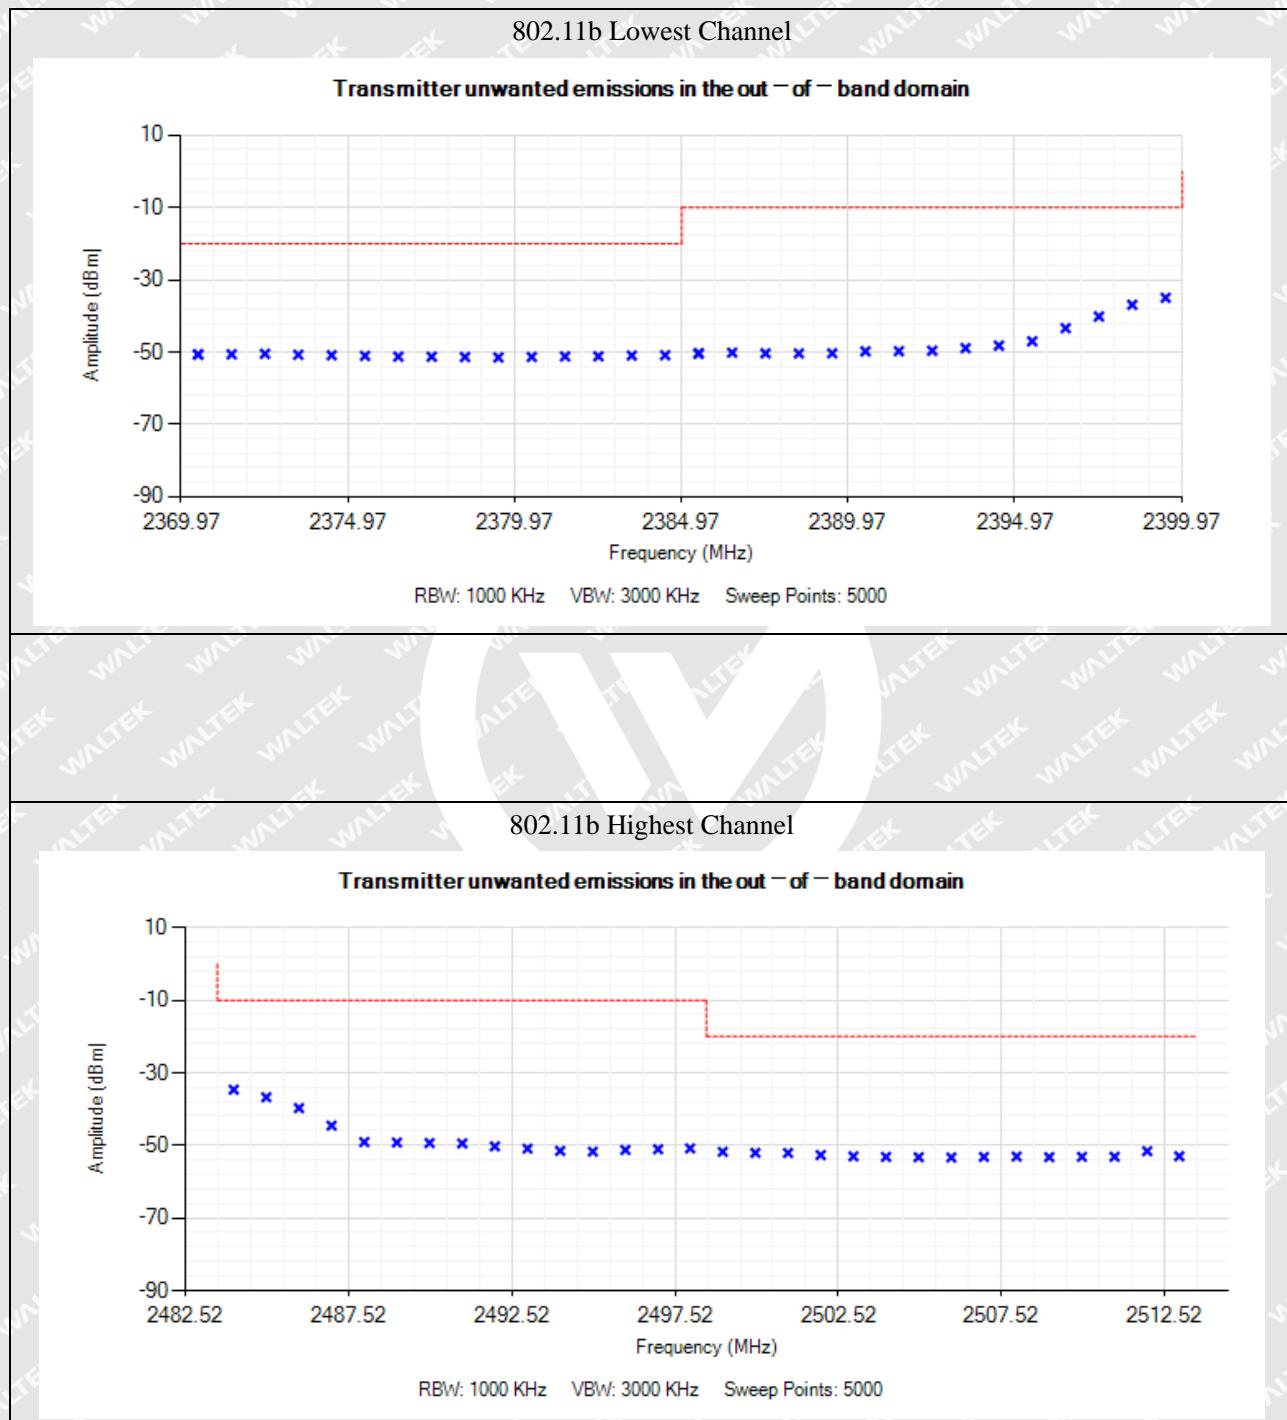**Antenna A**




## 802.11g Lowest Channel


## Transmitter unwanted emissions in the out - of - band domain

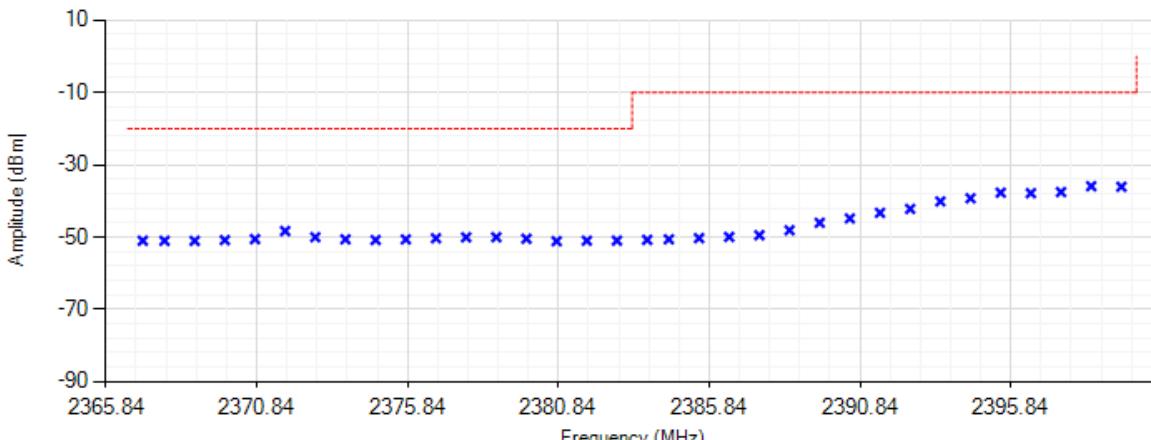



## 802.11g Highest Channel

## Transmitter unwanted emissions in the out - of - band domain

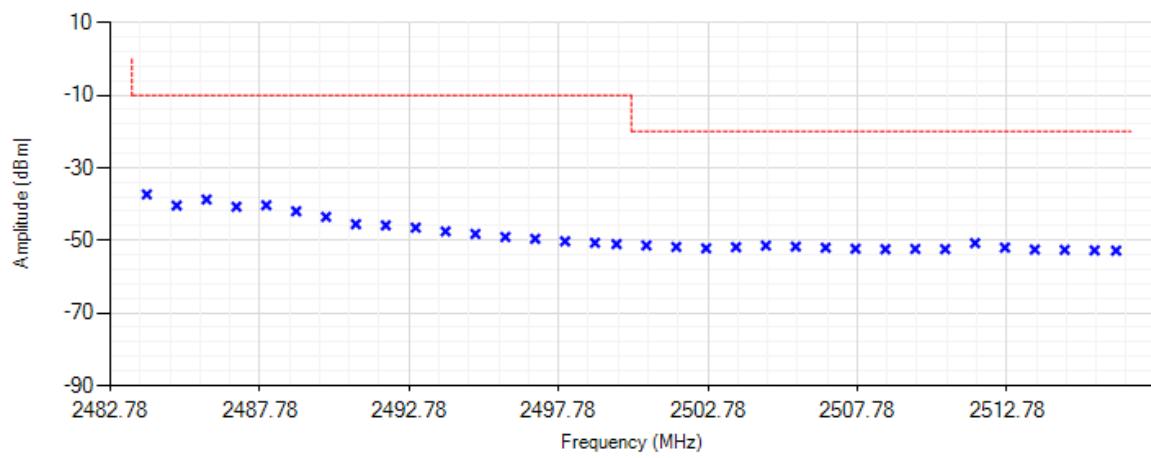

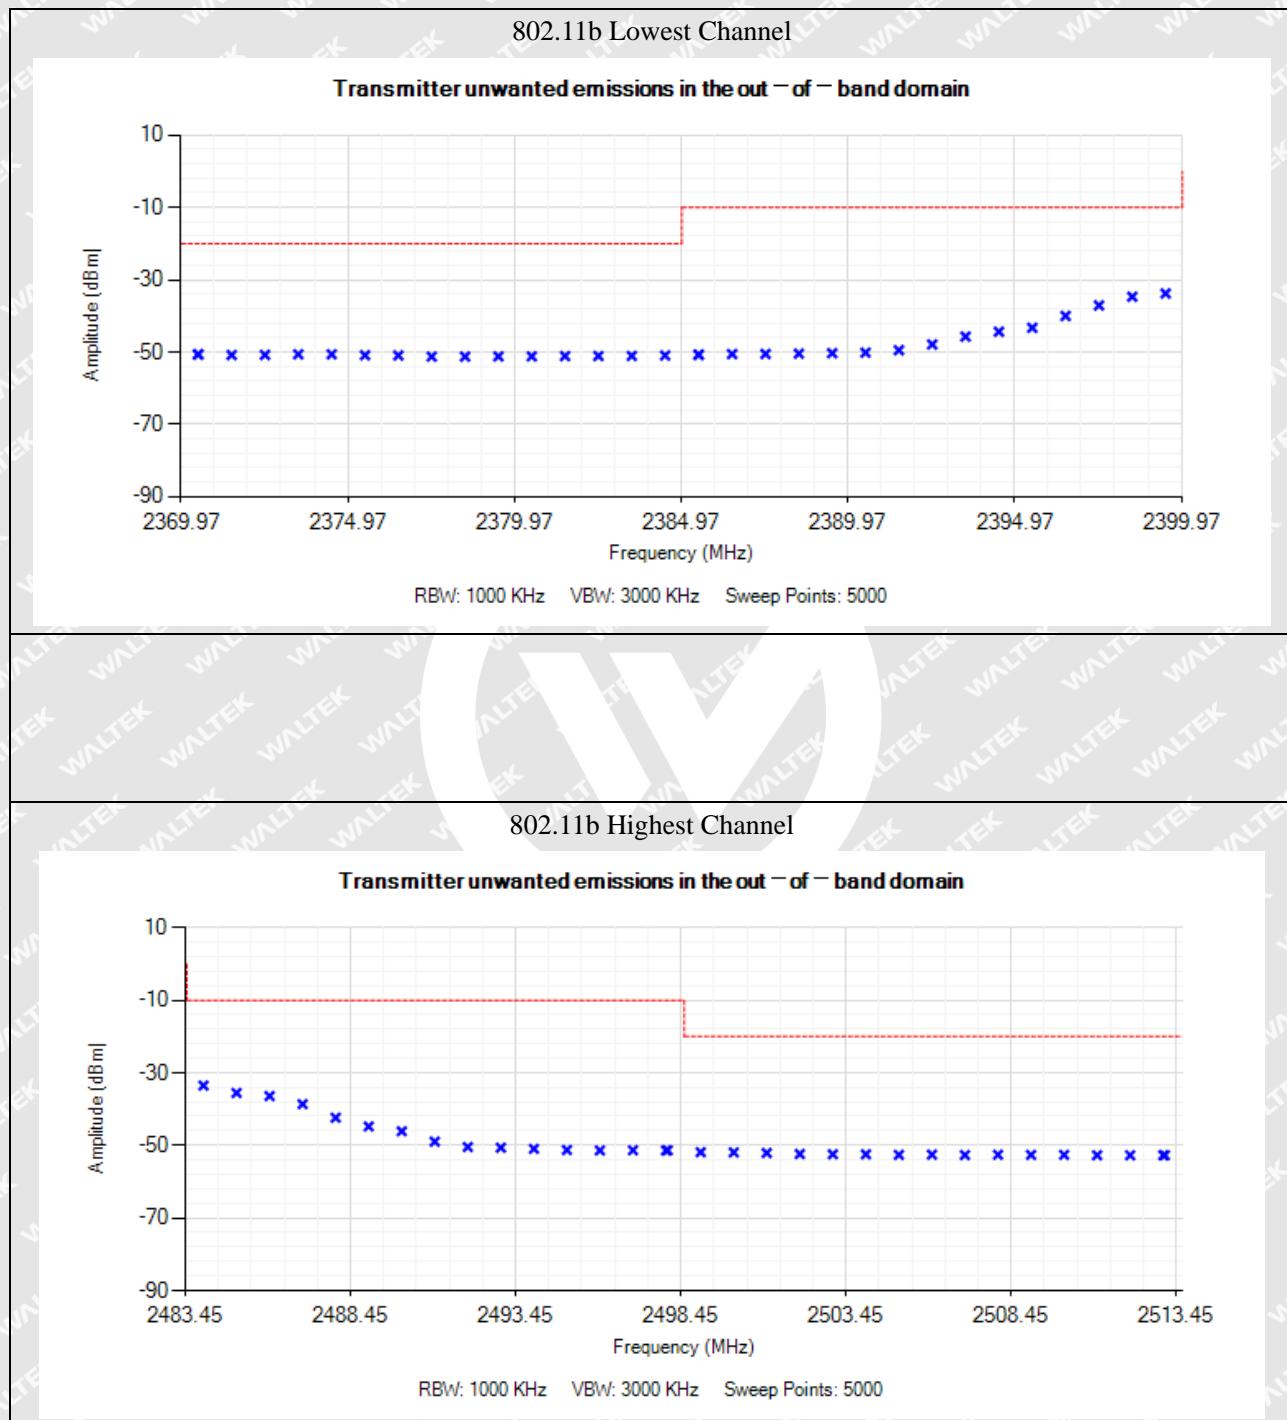**Antenna B**

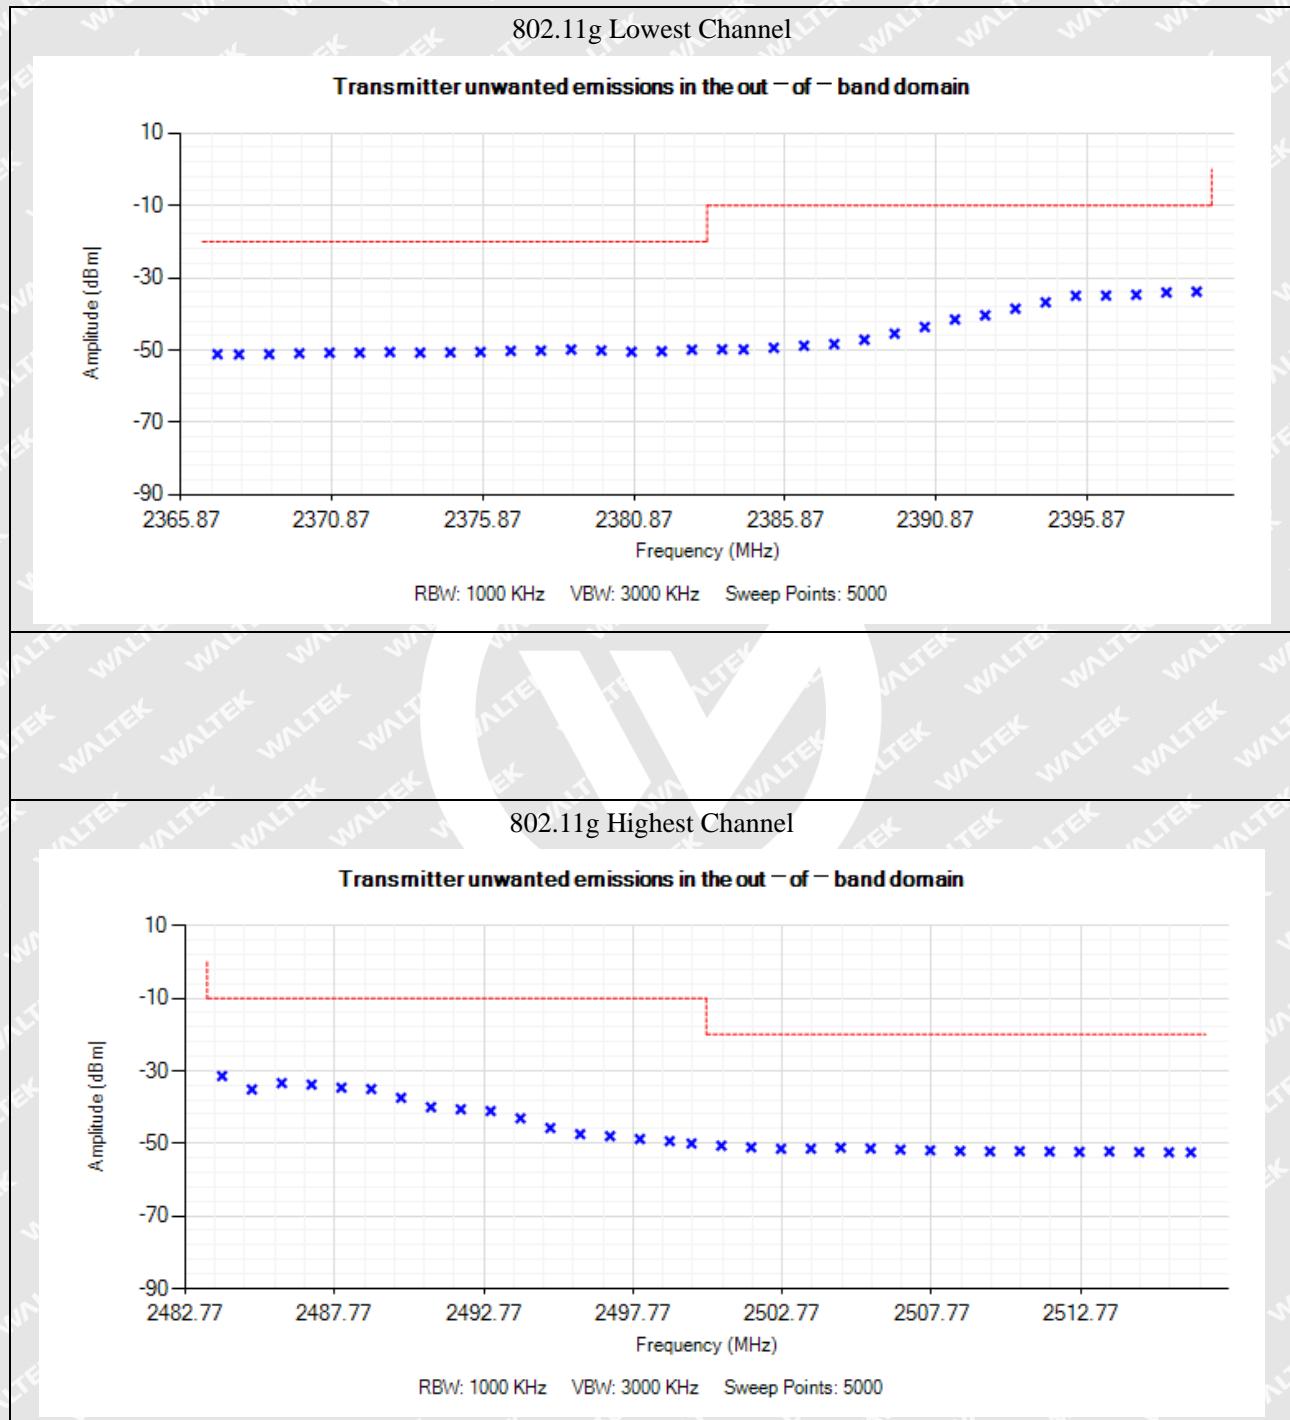


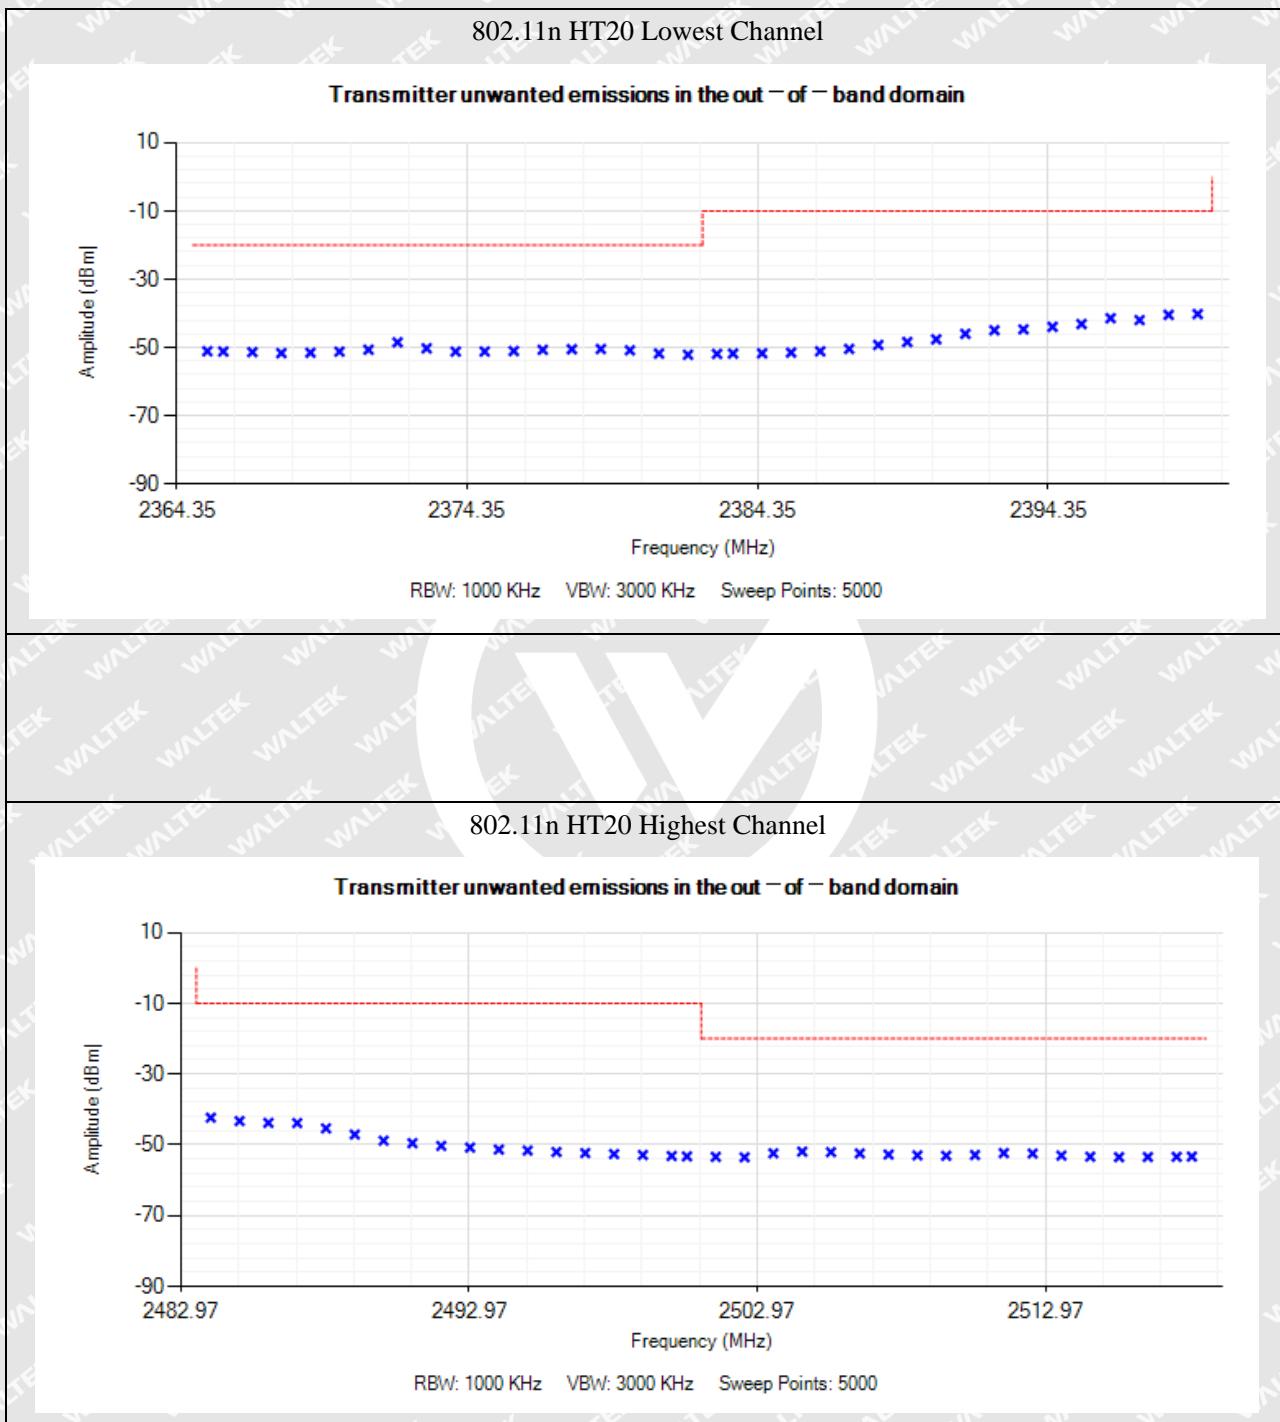**MIMO(Antenna A+ B):**




## 802.11n HT40 Lowest Channel

## Transmitter unwanted emissions in the out - of - band domain

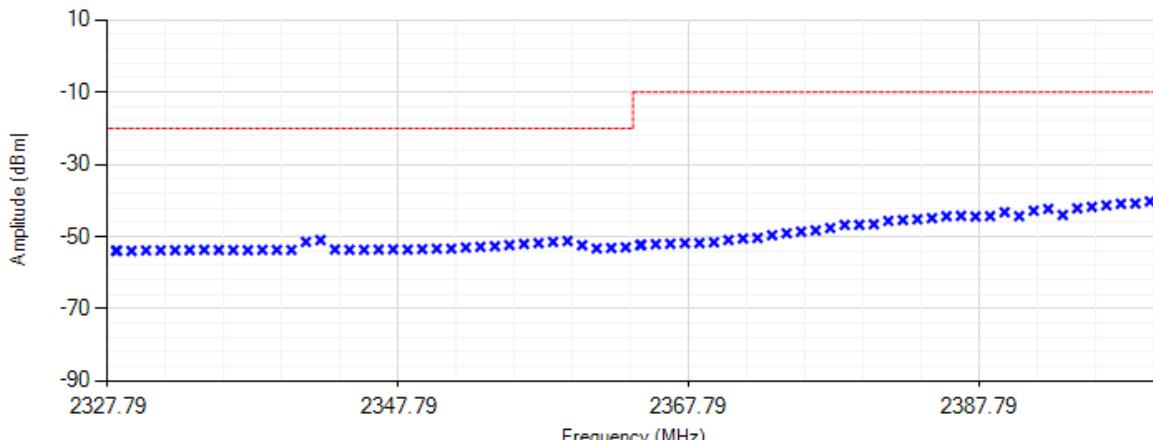

## 802.11n HT40 Highest Channel

## Transmitter unwanted emissions in the out - of - band domain

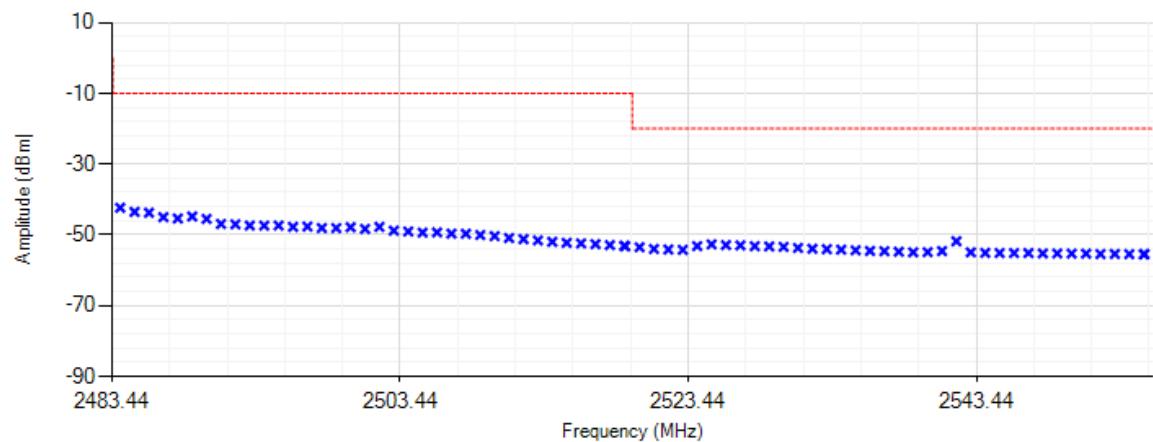



## 8. Transmitter Unwanted Emissions in the Spurious Domain

### 8.1 Standard Applicable

According to section 4.3.2.9.3, the transmitter unwanted emissions in the spurious domain shall not exceed the values given in the following table.

Transmitter limit for spurious emissions

Frequency range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

### 8.2 Test Procedure

The device under test has an integral antenna and the radiated measurement shall apply to the device, using the method of measurement as described in the EN300328 section 5.4.9.2.

RBW=100kHz      VBW=300kHz    30MHz-1GHz  
 RBW=1MHz        VBW=3MHz     1GHz-12.75GHz

### 8.3 Summary of Test Results/Plots


According to the data, the EUT complied with the EN 300328 standards, and had the worst cases:



➤ Radiated Spurious Emission From 30MHz To 1GHz  
Antenna A(worst case)

**802.11b**


Test Channel:	Lowest channel	Polarity:	Horizontal
---------------	----------------	-----------	------------

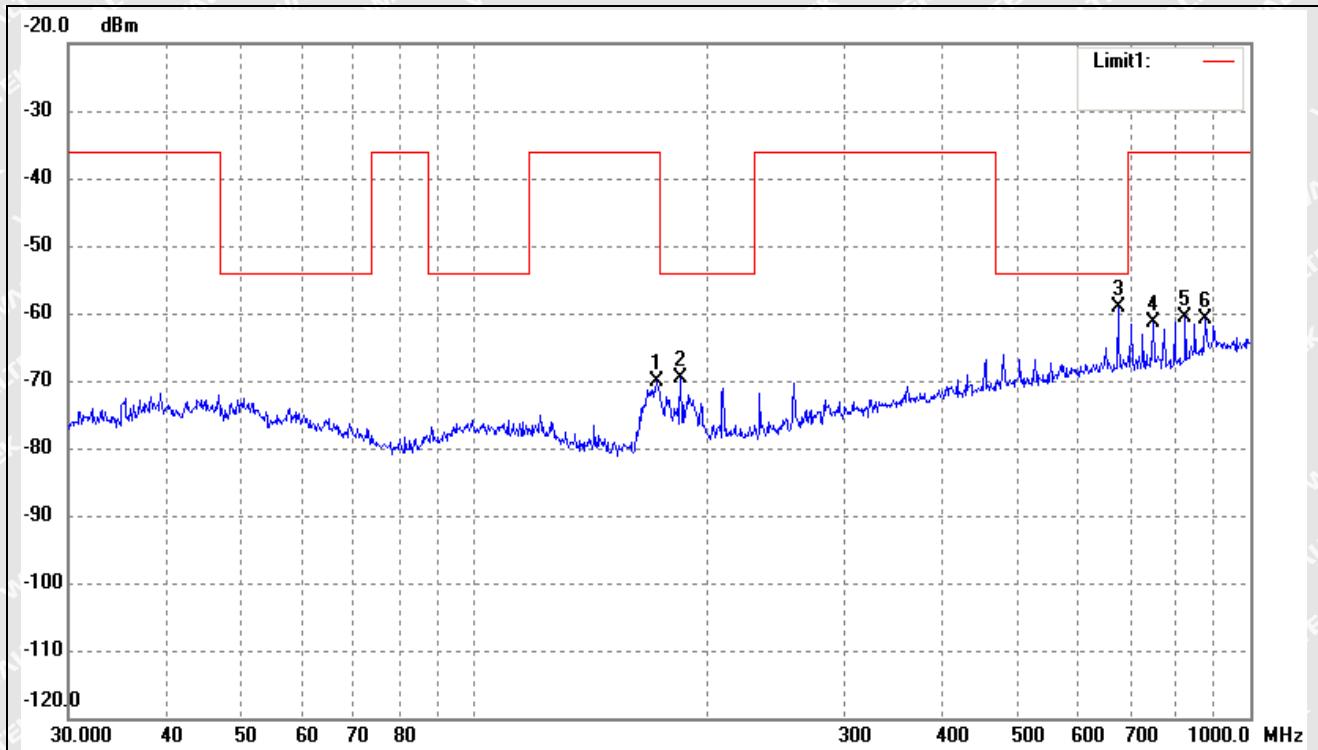

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	171.9946	-67.03	-3.08	-70.11	-36.00	-34.11	ERP
2	184.4898	-67.58	-1.98	-69.56	-54.00	-15.56	ERP
3	675.2080	-69.13	9.93	-59.20	-54.00	-5.20	ERP
4	750.1083	-71.90	10.50	-61.40	-36.00	-25.40	ERP
5	824.5968	-72.46	11.80	-60.66	-36.00	-24.66	ERP
6	875.2470	-73.16	12.35	-60.81	-36.00	-24.81	ERP

**802.11b**


Test Channel:	Lowest channel	Polarity:	Vertical
---------------	----------------	-----------	----------

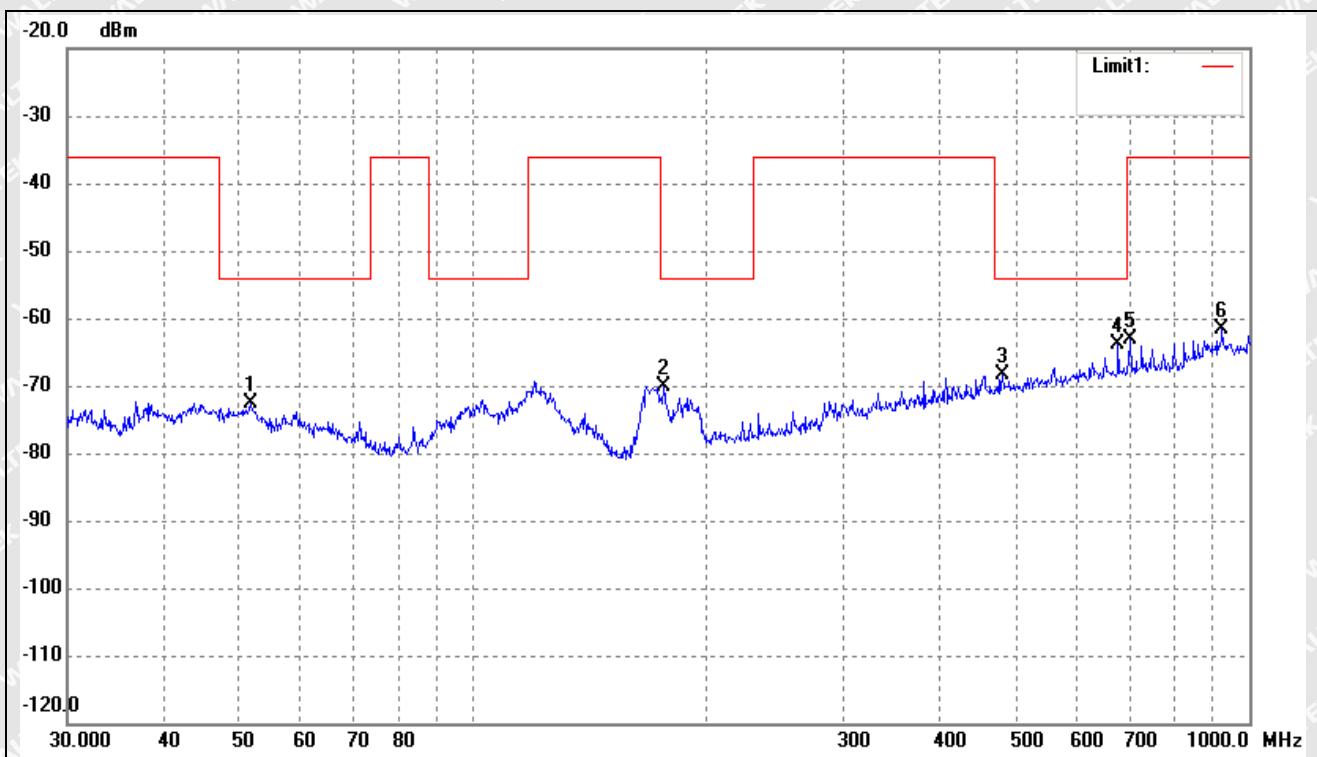

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	51.6616	-72.48	-0.20	-72.68	-54.00	-18.68	ERP
2	176.2686	-67.41	-2.77	-70.18	-54.00	-16.18	ERP
3	480.5276	-75.63	7.16	-68.47	-54.00	-14.47	ERP
4	677.5798	-73.82	9.94	-63.88	-54.00	-9.88	ERP
5	701.7610	-73.21	9.99	-63.22	-36.00	-27.22	ERP
6	922.5157	-75.18	13.63	-61.55	-36.00	-25.55	ERP

**802.11b**


Test Channel:	Highest channel	Polarity:	Horizontal
---------------	-----------------	-----------	------------

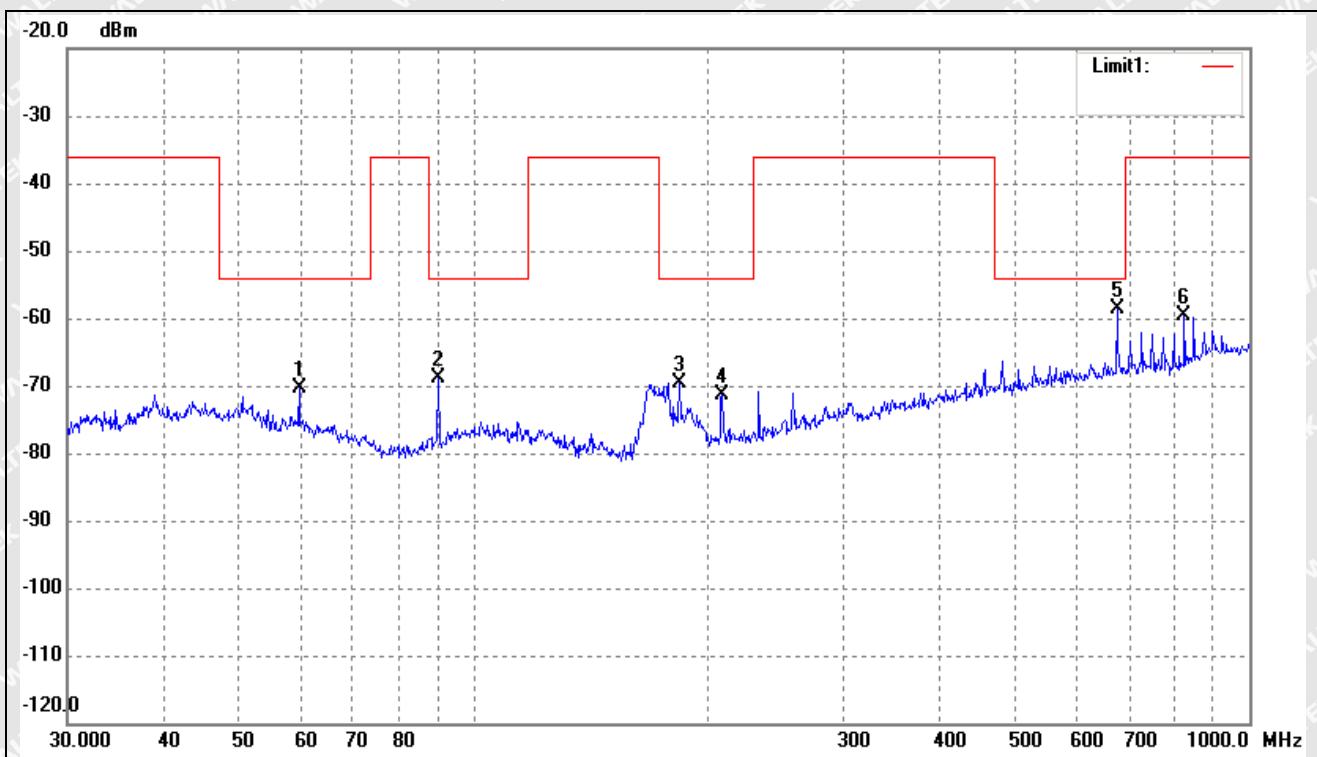

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	59.6493	-69.20	-1.18	-70.38	-54.00	-16.38	ERP
2	90.2205	-65.85	-3.11	-68.96	-54.00	-14.96	ERP
3	184.4898	-67.63	-1.98	-69.61	-54.00	-15.61	ERP
4	209.3129	-70.94	-0.51	-71.45	-54.00	-17.45	ERP
5	675.2080	-68.56	9.93	-58.63	-54.00	-4.63	ERP
6	824.5968	-71.39	11.80	-59.59	-36.00	-23.59	ERP

**802.11b**

Test Channel:	Highest channel	Polarity:	Vertical
---------------	-----------------	-----------	----------

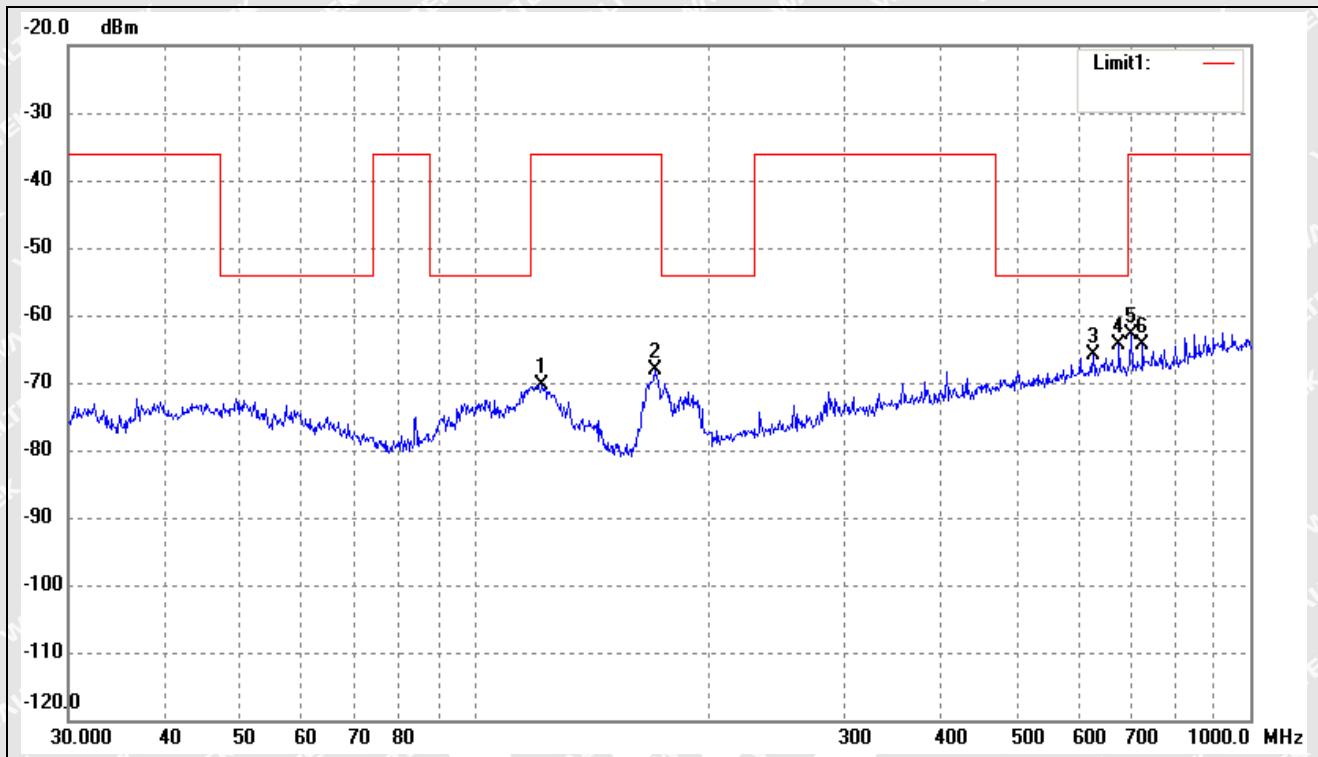

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	122.4040	-67.17	-3.13	-70.30	-36.00	-34.30	ERP
2	170.7926	-65.06	-3.17	-68.23	-36.00	-32.23	ERP
3	627.2738	-75.58	9.63	-65.95	-54.00	-11.95	ERP
4	677.5798	-74.41	9.94	-64.47	-54.00	-10.47	ERP
5	701.7610	-72.79	9.99	-62.80	-36.00	-26.80	ERP
6	726.8052	-75.26	10.80	-64.46	-36.00	-28.46	ERP

Note1: Pre-scan 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode, and found the 802.11b mode which it is worse case, so only show the test data for worse case.



➤ Radiated Spurious Emission Above 1GHz

*Antenna A*

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar
4824.0	-47.61	7.92	-39.69	-30	-9.69	H
802.11b Lowest Channel						
7236.0	-58.23	13.97	-44.26	-30	-14.26	H
4824.0	-49.23	7.92	-41.31	-30	-11.31	V
7236.0	-57.36	13.64	-43.72	-30	-13.72	V
802.11b Highest Channel						
4944.0	-46.83	8.27	-38.56	-30	-8.56	H
7416.0	-55.69	13.73	-41.96	-30	-11.96	H
4944.0	-50.58	8.27	-42.31	-30	-12.31	V
7416.0	-60.08	13.73	-46.35	-30	-16.35	V

*Antenna B*

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar
4824.0	-49.47	7.92	-41.55	-30	-11.55	H
802.11b Lowest Channel						
7236.0	-59.45	13.97	-45.48	-30	-15.48	H
4824.0	-50.33	7.92	-42.41	-30	-12.41	V
7236.0	-58.18	13.64	-44.54	-30	-14.54	V
802.11b Highest Channel						
4944.0	-48.52	8.27	-40.25	-30	-10.25	H
7416.0	-57.09	13.73	-43.36	-30	-13.36	H
4944.0	-50.86	8.27	-42.59	-30	-12.59	V
7416.0	-58.91	13.73	-45.18	-30	-15.18	V


Note 1: Testing is carried out with frequency rang 30MHz to 12.75GHz, which above 3<sup>rd</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note 2: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Note3: Pre-scan 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode, and found the 802.11b mode which it is worse case, so only show the test data for worse case.




➤ Conducted Transmitter Spurious Emission:  
Antenna A

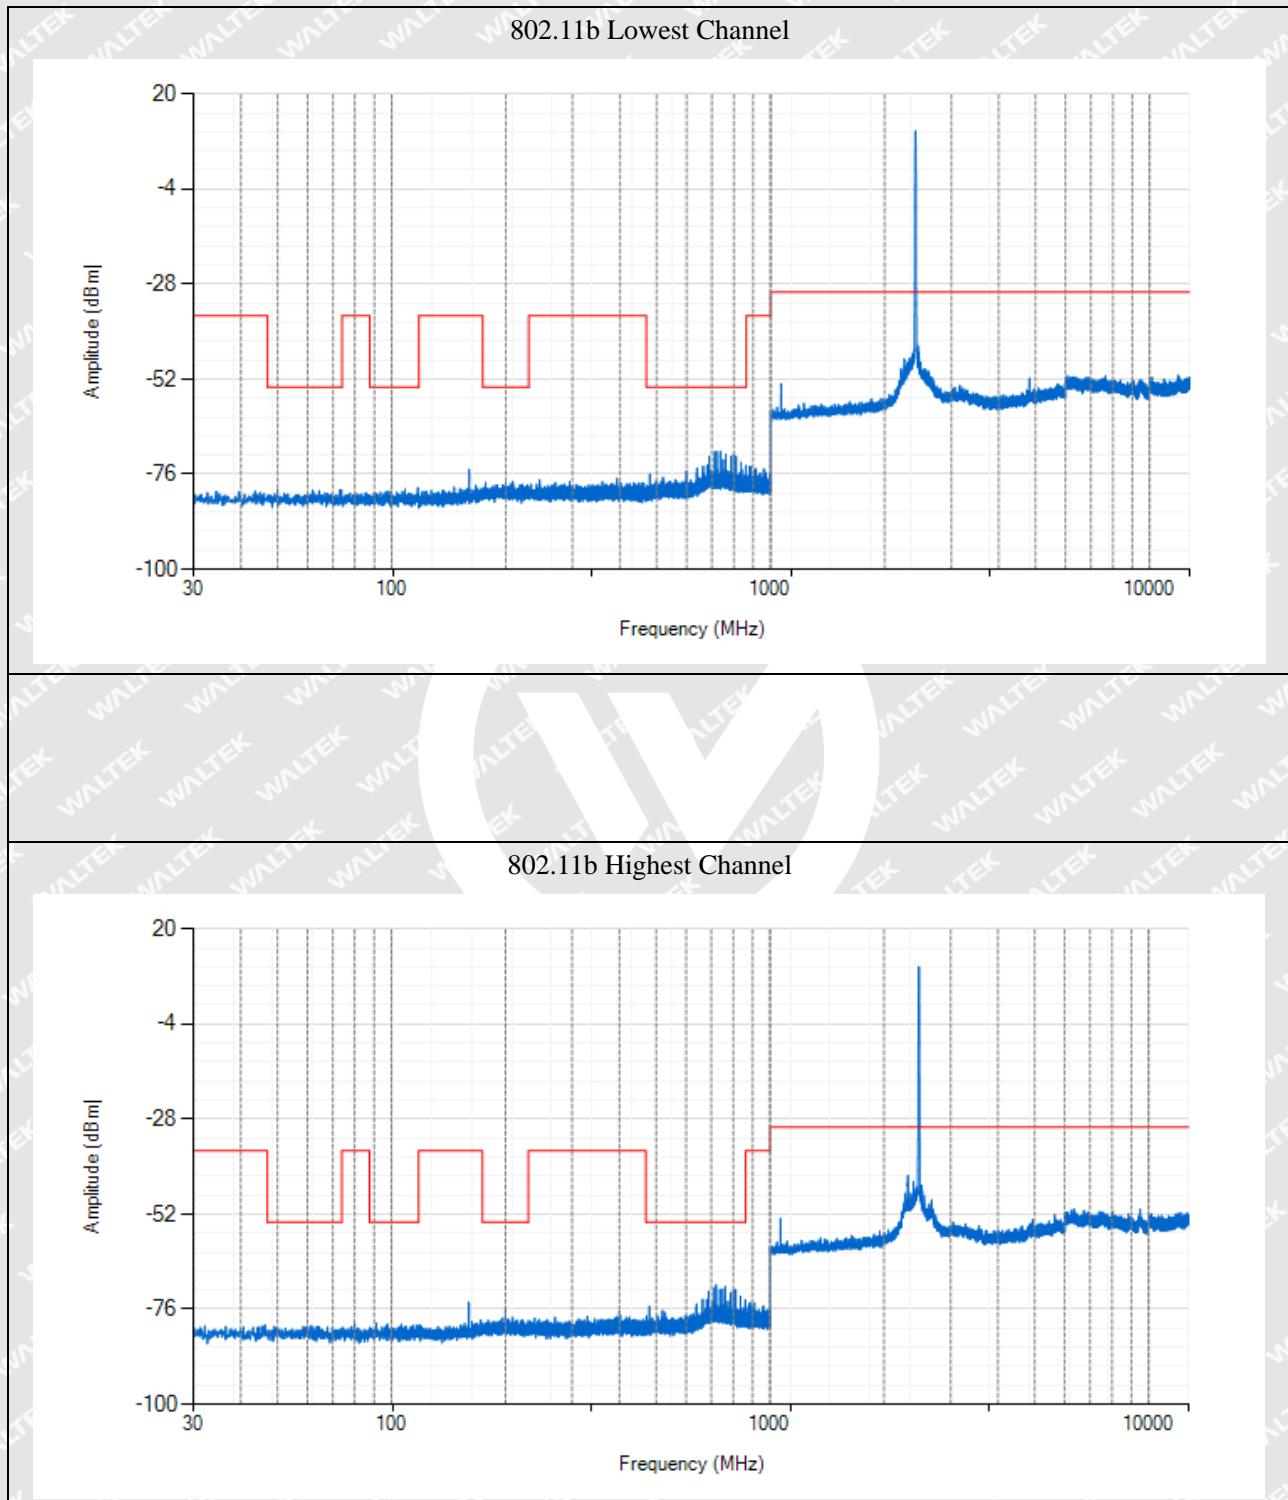



Antenna B

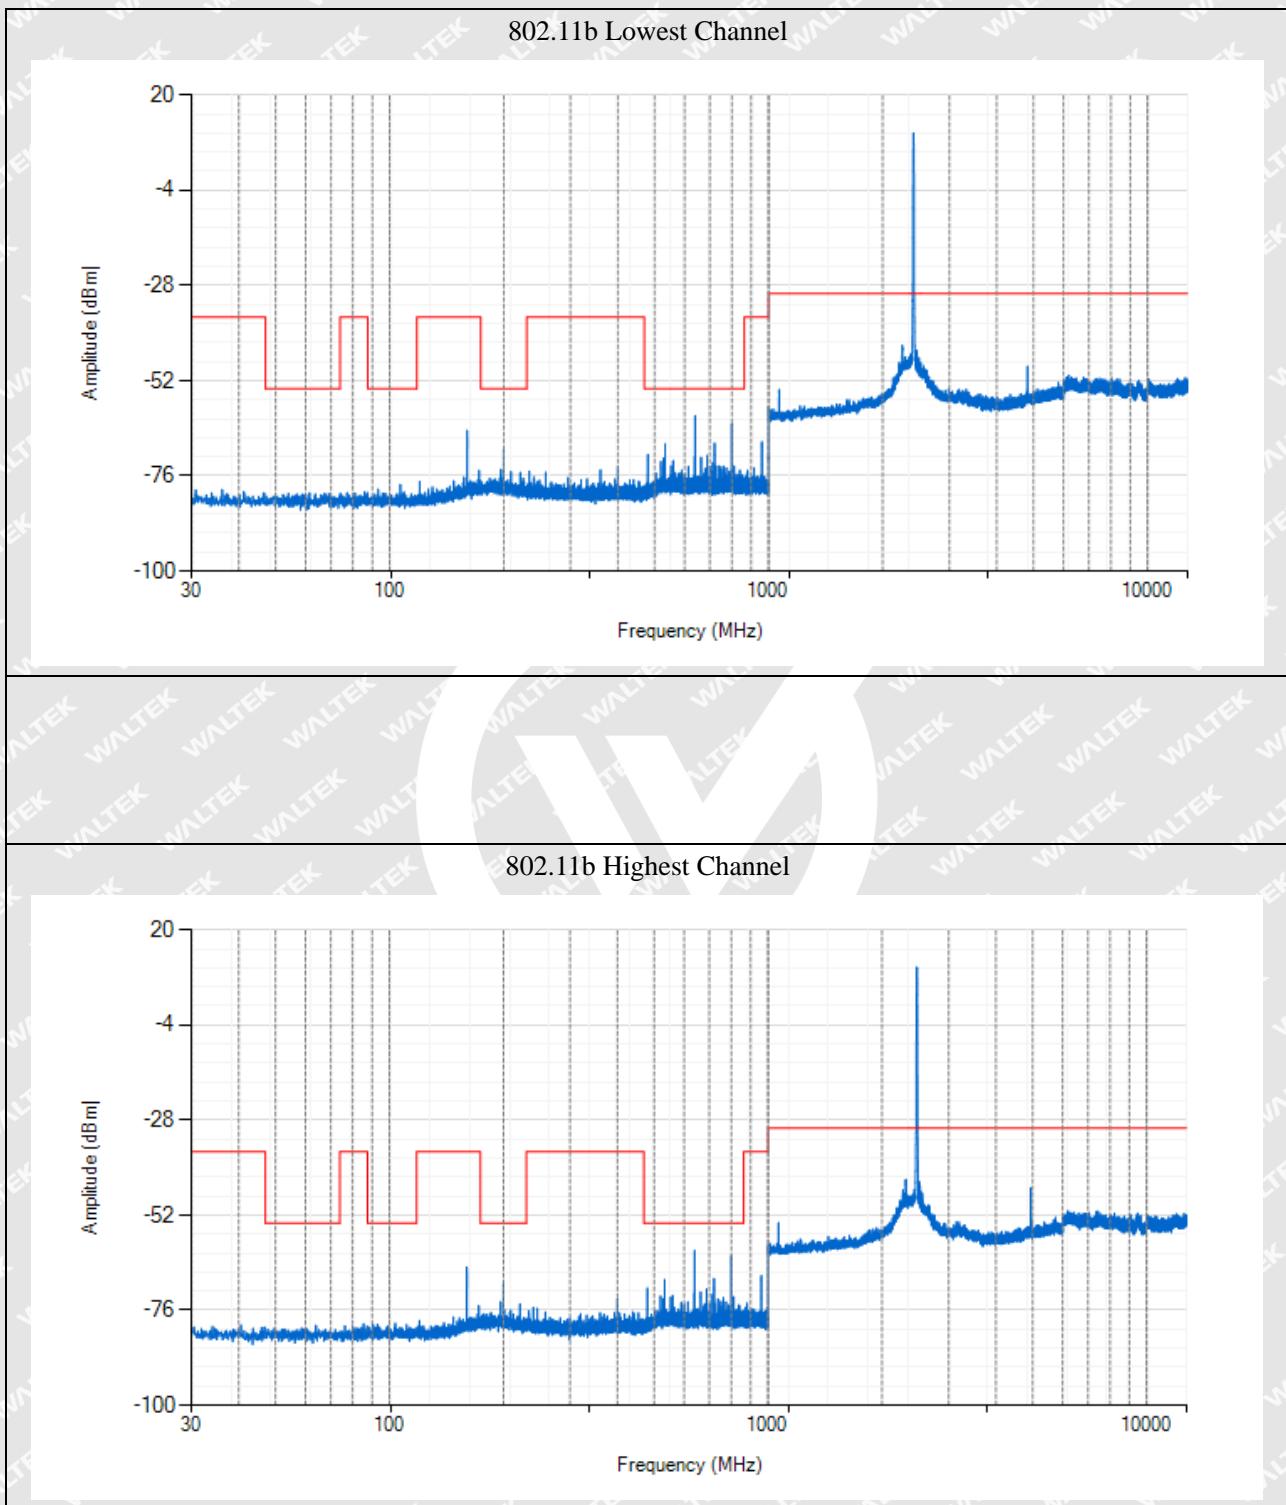

Note 1: Testing is carried out with frequency rang 30MHz to 12.75GHz, which emissions are too small are not list above.

Note2: Pre-scan 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode, and found the 802.11b mode which it is worse case, so only show the test data for worse case.



## 9. Receiver Spurious Emissions

### 9.1 Standard Applicable

According to section 4.3.2.10.3, the spurious emissions of the receiver shall not exceed the values given in the following table .

Spurious emission limits for receivers

Frequency range	Maximum power	Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz

### 9.2 Test Procedure

The device under test has an integral antenna and the radiated measurement shall apply to the device, using the method of measurement as described in the EN300328 section 5.4.10.2.

RBW=100kHz      VBW=300kHz      30MHz-1GHz  
 RBW=1MHz      VBW=3MHz      1GHz-12.75GHz

### 9.3 Summary of Test Results/Plots


According to the data, the EUT complied with the EN 300328 standards, and had the worst cases:



- Radiated Receiver Spurious Emission From 30MHz To 1GHz
- Antenna A(worst case)

**802.11b**

Test Channel:	Lowest channel	Polarity:	Horizontal
---------------	----------------	-----------	------------

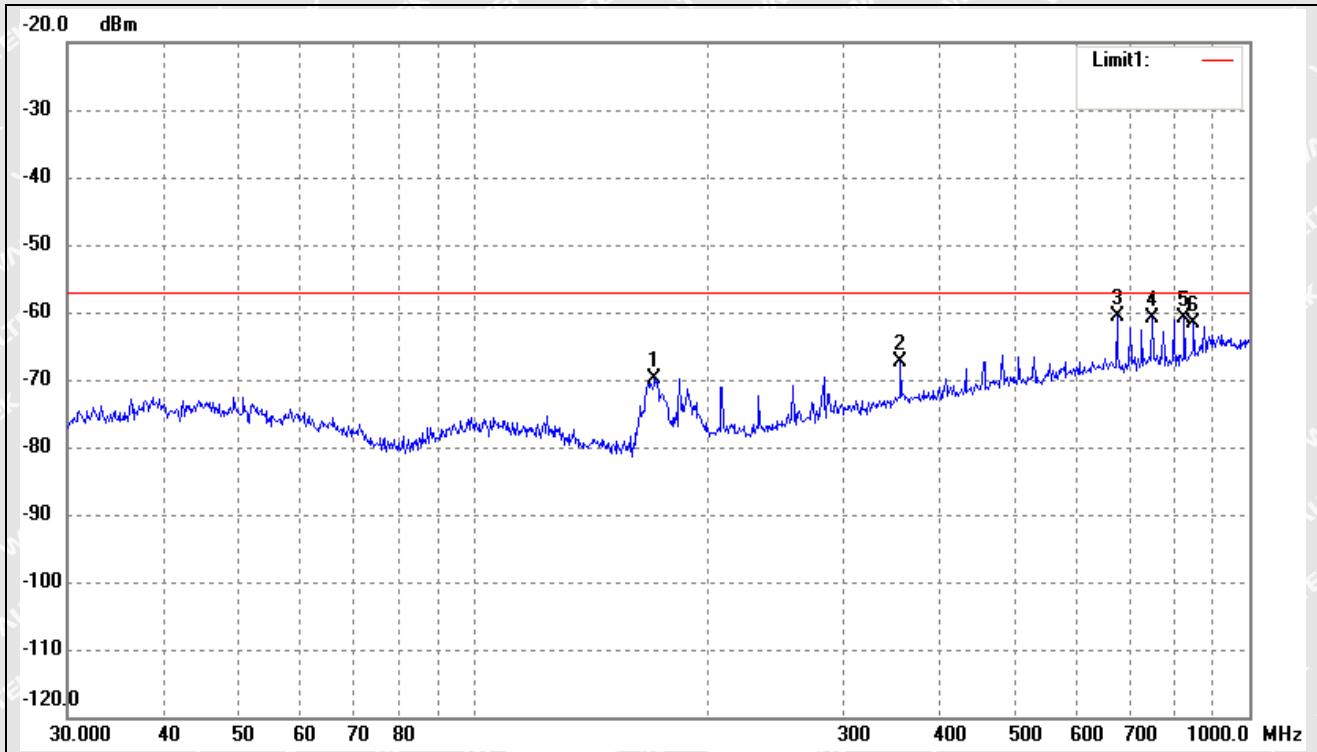

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	171.3926	-66.81	-3.13	-69.94	-57.00	-12.94	ERP
2	355.4273	-71.81	4.42	-67.39	-57.00	-10.39	ERP
3	675.2080	-70.53	9.93	-60.60	-57.00	-3.60	ERP
4	750.1083	-71.41	10.50	-60.91	-57.00	-3.91	ERP
5	824.5968	-72.77	11.80	-60.97	-57.00	-3.97	ERP
6	848.0562	-73.73	12.10	-61.63	-57.00	-4.63	ERP


**802.11b**

Test Channel:

Lowest channel

Polarity:


Vertical

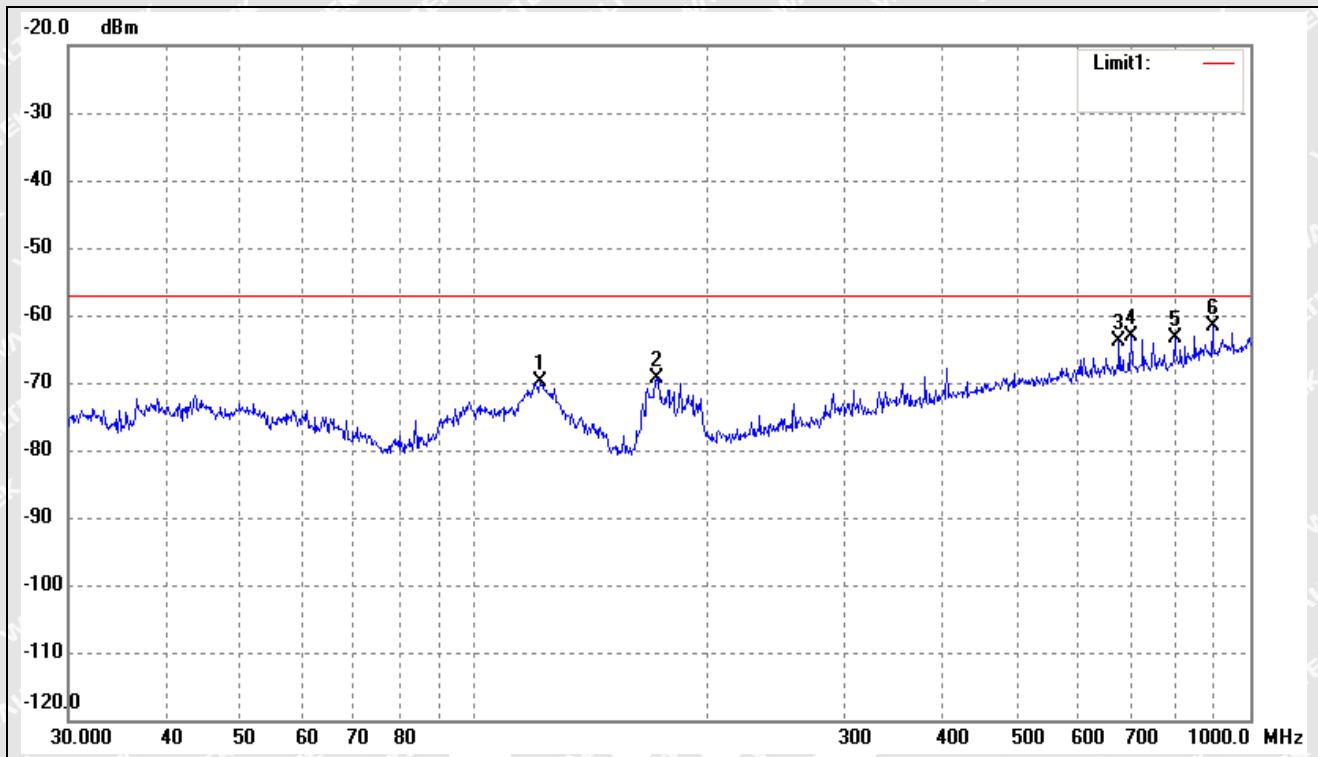

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	121.5486	-67.04	-2.91	-69.95	-57.00	-12.95	ERP
2	171.9946	-66.21	-3.08	-69.29	-57.00	-12.29	ERP
3	677.5798	-73.74	9.94	-63.80	-57.00	-6.80	ERP
4	701.7610	-73.14	9.99	-63.15	-57.00	-6.15	ERP
5	798.9797	-73.78	10.53	-63.25	-57.00	-6.25	ERP
6	893.8567	-74.76	13.10	-61.66	-57.00	-4.66	ERP

**802.11b**


Test Channel:	Highest channel	Polarity:	Horizontal
---------------	-----------------	-----------	------------

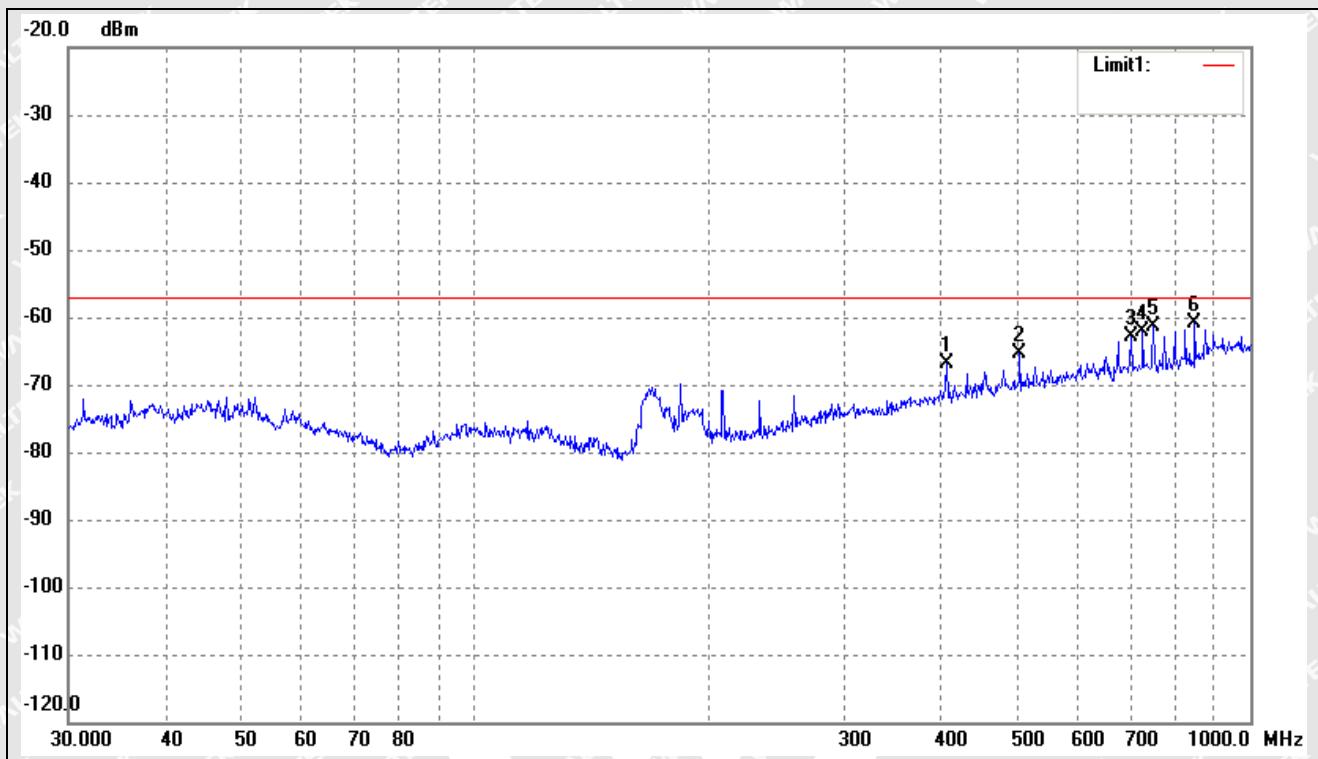

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	406.0880	-72.27	5.49	-66.78	-57.00	-9.78	ERP
2	504.7062	-73.14	7.73	-65.41	-57.00	-8.41	ERP
3	701.7610	-72.86	9.99	-62.87	-57.00	-5.87	ERP
4	726.8052	-72.93	10.80	-62.13	-57.00	-5.13	ERP
5	750.1083	-71.98	10.50	-61.48	-57.00	-4.48	ERP
6	848.0563	-72.91	12.10	-60.81	-57.00	-3.81	ERP

**802.11b**

Test Channel:	Highest channel	Polarity:	Vertical
---------------	-----------------	-----------	----------

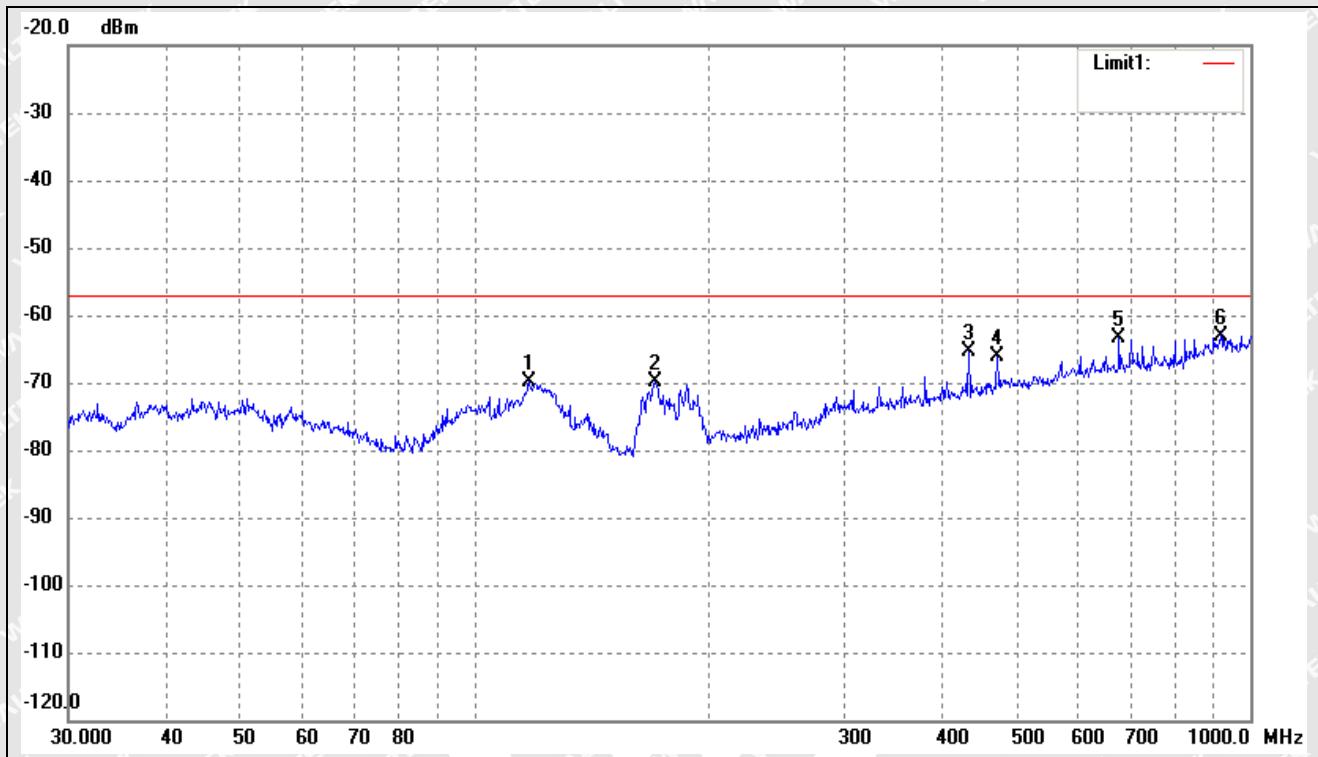

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	117.7725	-67.63	-2.27	-69.90	-57.00	-12.90	ERP
2	171.3926	-66.65	-3.13	-69.78	-57.00	-12.78	ERP
3	434.0651	-71.30	6.02	-65.28	-57.00	-8.28	ERP
4	472.1760	-73.01	6.90	-66.11	-57.00	-9.11	ERP
5	677.5798	-73.33	9.94	-63.39	-57.00	-6.39	ERP
6	916.0687	-76.55	13.55	-63.00	-57.00	-6.00	ERP



➤ Radiated Receiver Spurious Emission Above 1GHz

Antenna A (worst case)

Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Polar
1659.3	-56.68	-47	-9.68	H/V
6800.3	-53.55	-47	-6.55	H
4206.6	-57.29	-47	-10.29	V
7081.3	-54.96	-47	-7.96	V

Antenna B (worst case)

Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Polar
1632.1	-56.53	-47	-9.53	H/V
6781.4	-53.00	-47	-6.00	H
4202.9	-57.82	-47	-10.82	V
7094.1	-55.63	-47	-8.63	V


Note1: Pre-scan 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode, and found the 802.11b mode which it is worse case, so only show the test data for worse case.

**WALTEK**




## ➤ Conducted Receiver Spurious Emission

Antenna A(worst case)

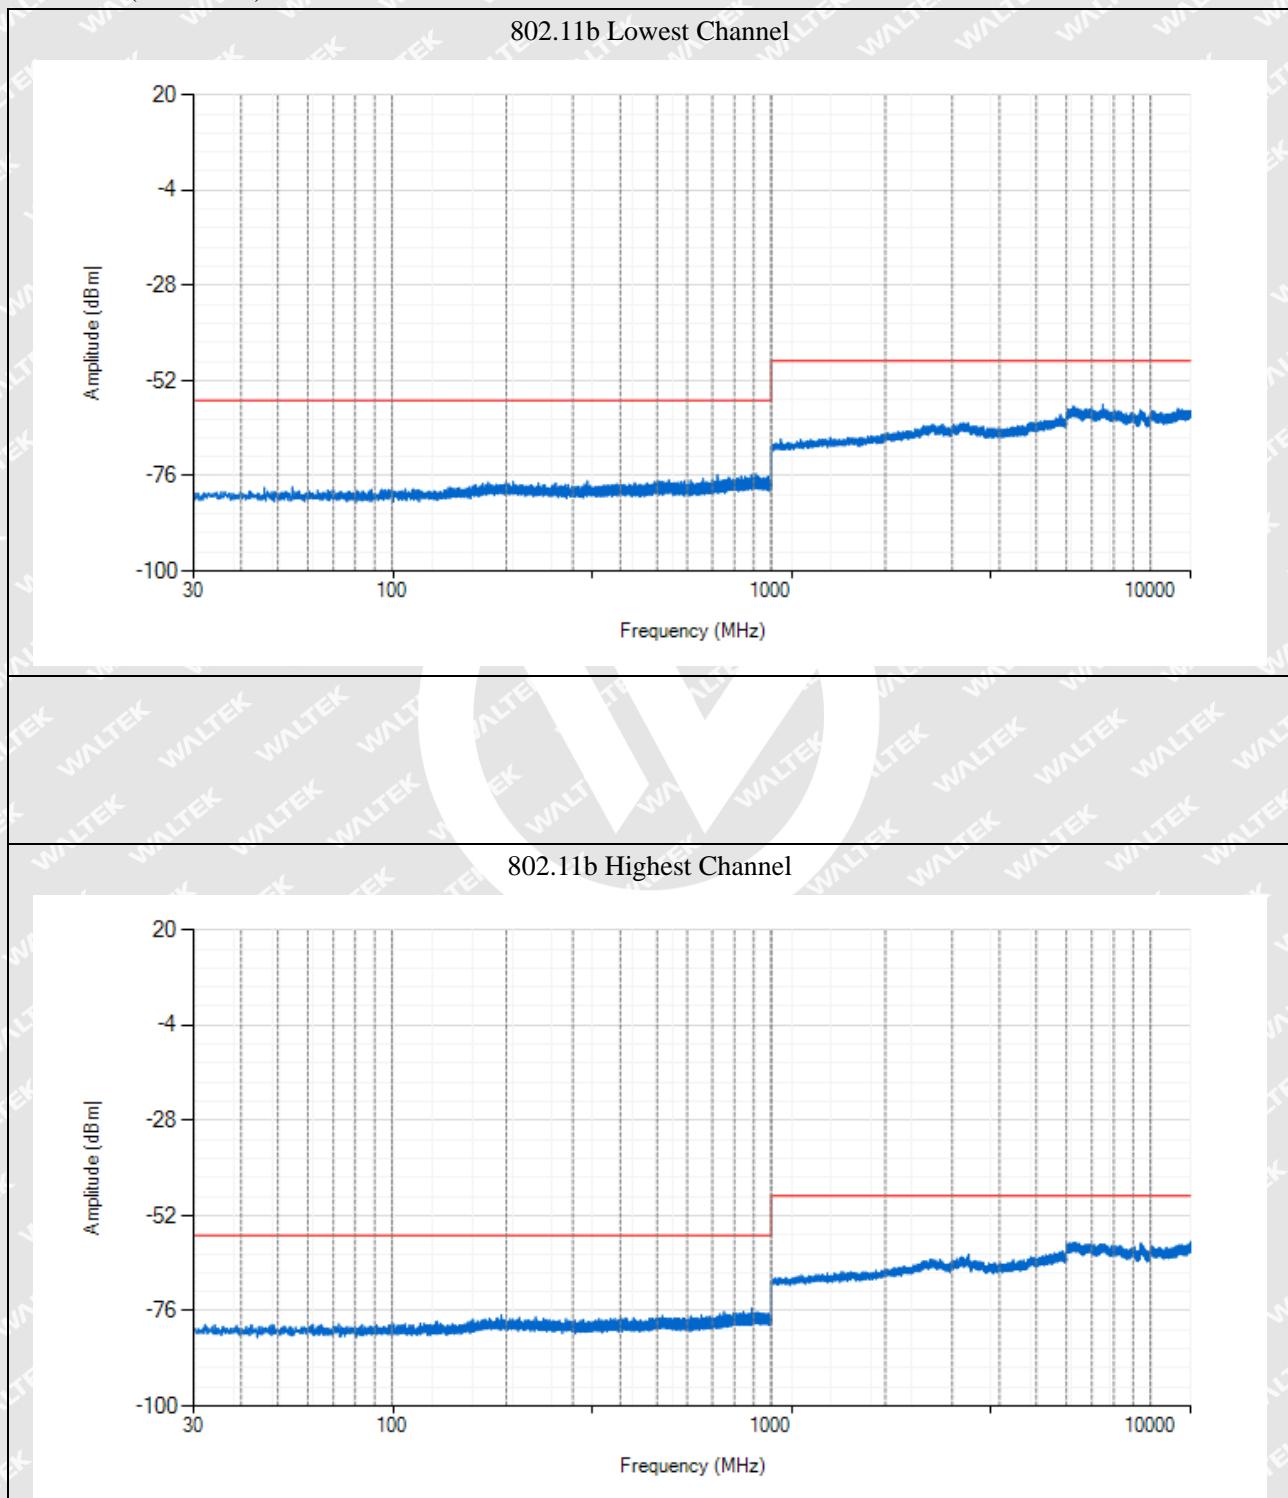



## Antenna B(worst case)

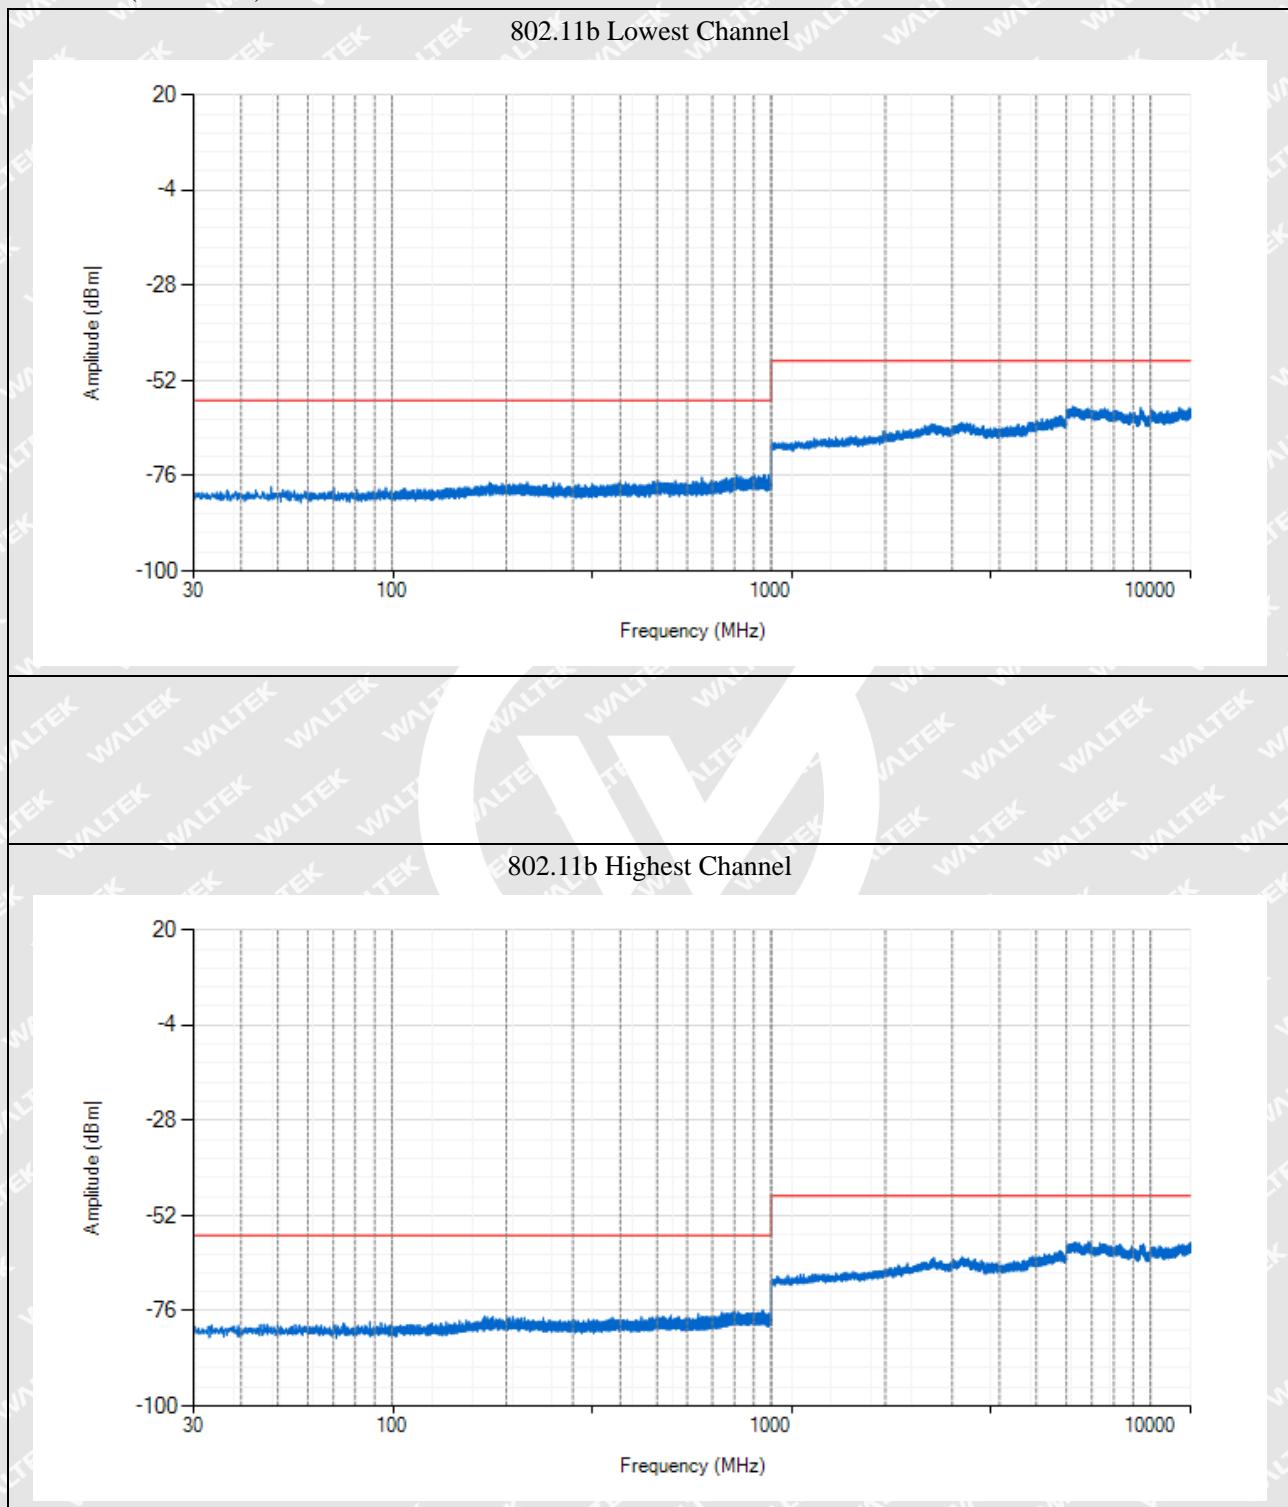

Note1: Testing is carried out with frequency rang 30MHz to 12.75GHz, which above 1GHz are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note2: Pre-scan 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode, and found the 802.11b mode which it is worse case, so only show the test data for worse case.



## 10. Receiver Blocking

### 10.1 Standard Application

According to section 4.3.2.11.2, receiver blocking is a measure of the ability of the equipment to receive a wanted signal on its operating channel without exceeding a given degradation in the presence of an unwanted signal (blocking signal) at frequencies other than those of the operating band.

Load Based Equipment not using any of the mechanisms referenced above shall comply with the following minimum set of requirements :

The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t).

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category 1, 2 and 3 provided in table 14, table 15 or table 16.

#### Receiver category 1

Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

#### Receiver category 2

non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % (irrespective of the maximum RF output power); or equipment (adaptive or non-adaptive) with a maximum RF output power greater than 0 dBm e.i.r.p. and less than or equal to 10 dBm e.i.r.p.

#### Receiver category 3

non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % (irrespective of the maximum RF output power); or equipment (adaptive or non-adaptive) with a maximum RF output power of 0 dBm e.i.r.p.



Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

<b>Wanted signal mean power from companion device (dBm) (see notes 1 and 4)</b>	<b>Blocking signal frequency (MHz)</b>	<b>Blocking signal power (dBm) (see note 4)</b>	<b>Type of blocking signal</b>
(-133 dBm + 10 × log <sub>10</sub> (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504		
(-139 dBm + 10 × log <sub>10</sub> (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2524 2584 2674	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 26 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 20 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.



Table 15: Receiver Blocking parameters receiver category 2 equipment

<b>Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</b>	<b>Blocking signal frequency (MHz)</b>	<b>Blocking signal power (dBm) (see note 3)</b>	<b>Type of blocking signal</b>
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 26 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Table 16: Receiver Blocking parameters receiver category 3 equipment

<b>Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</b>	<b>Blocking signal frequency (MHz)</b>	<b>Blocking signal power (dBm) (see note 3)</b>	<b>Type of blocking signal</b>
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 26 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.



## 10.2 Test Procedure

Step 1: • For non-frequency hopping equipment, the UUT shall be set to the lowest operating channel.

Step 2: • The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.

Step 3: • With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. The variable attenuator is set to a value that achieves the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 with a resolution of at least 1 dB. The resulting level for the wanted signal at the input of the UUT is Pmin. This value shall be measured and recorded in the test report.

• The signal level is increased by the value provided in the table corresponding to the receiver category and type of equipment.

Step 4: • The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is met.

Step 5: • Repeat step 4 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.

Step 6: • For non-frequency hopping equipment, repeat step 2 to step 5 with the UUT operating at the highest operating channel.

## 10.3 Test Setup

According to the section 5.4.11.2.1, the test block diagram shall be used.

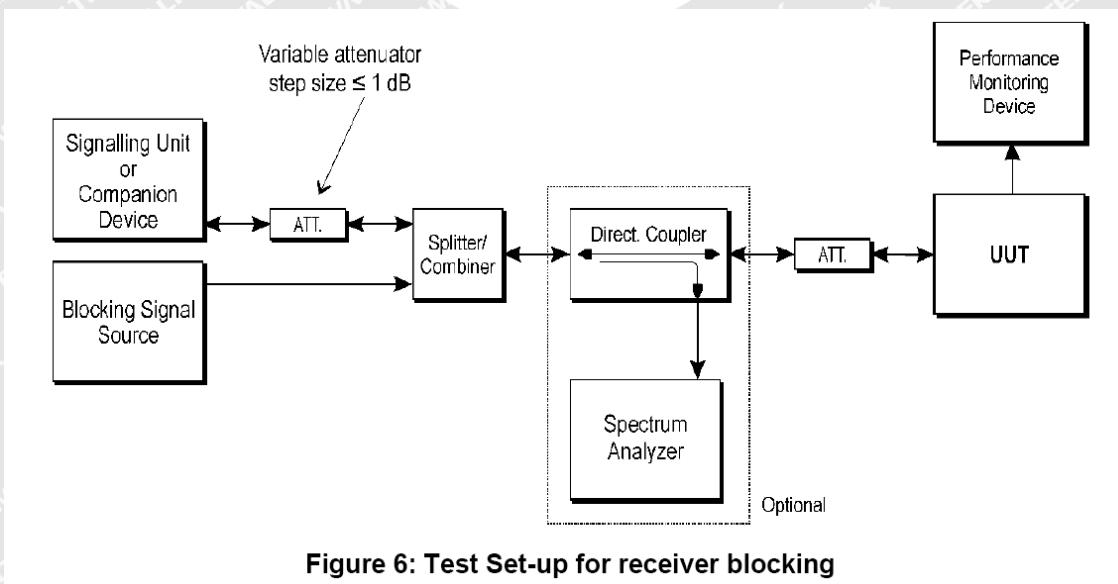


Figure 6: Test Set-up for receiver blocking

All test procedure is carried to the section 5.4.11.2.1



## 10.4 Summary of Test Results/Plots

The product is receiver category 1

**Antenna A(worst case)**

Worst case at 802.11b mode						
Operating Channel	Wanted signal power (dBm)	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	Test PER(%)	Limit(%)	Result
Lowest	-68	2380	-34	3.47	<10.00	Pass
		2504				
	-74	2300	-34	2.46	<10.00	Pass
		2330				
		2360				
		2524				
		2584				
		2674				
Highest	-68	2380	-34	2.56	<10.00	Pass
		2504				
	-74	2300	-34	3.14	<10.00	Pass
		2330				
		2360				
		2524				
		2584				
		2674				

\*communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. While the Companion device (CMW500) adjust to a level which can obtain the minimum performance criteria PER 10%, This level define to Pmin

Remark: the smallest channel bandwidth shall be used together with the lowest data rate for this channel bandwidth. This mode of operation are aligned with the performance criteria defined in clause 4.3.1.12.3 or clause 4.3.2.11.3 as declared by the manufacturer (see clause 5.4.1.t).



## EXHIBIT 1 - EUT PHOTOGRAPHS

---


Please refer to "ANNEX".



**WALTEK**



## EXHIBIT 2 - TEST SETUP PHOTOGRAPHS
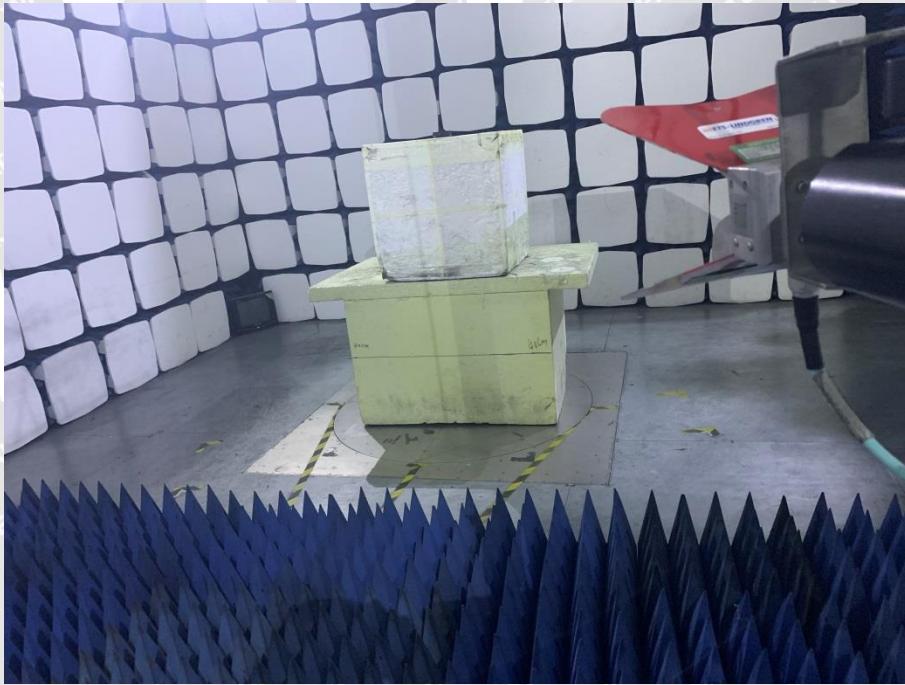
<p><b>Spurious Emission Test Setup (Above 1GHz)</b></p>	 A photograph showing a test setup inside an anechoic chamber. A green rectangular object sits on a yellow foam-lined turntable. Above it, a vertical metal frame supports several horizontal rods. Two blue lights are mounted on the frame, pointing towards the object. The background consists of a grid of white rectangular panels.
<p><b>Spurious Emission Test Setup (Above 1GHz)</b></p>	 A photograph showing a side view of the same test setup. The green object is on the turntable, and a red and black measurement horn antenna is positioned to its right, pointing towards the object. The floor is covered with blue triangular absorber panels, and the background is the same white panel wall.

\*\*\*\*\* END OF REPORT \*\*\*\*\*