



RADIO TEST REPORT
ETSI EN 301 908-1 V13.1.1 (2019-11)
3GPP TS 38.521-1 (V15.3.0) (07-2019)
3GPP TS 38 521-3 V15.3.0 (2019-07)

Product : Smart Phone
Trade Mark : Blackview
Model Name : BL8800 Pro
Family Model : BL8800
Report No. : STR220218001009E

Prepared for

DOKE COMMUNICATION (HK) LIMITED.
RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK,
CHINA.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name** : DOKE COMMUNICATION (HK) LIMITED.Address : RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD
WANCHAI HK, CHINA.**Manufacturer's Name** : Shenzhen DOKE Electronic Co.,Ltd.Address : 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road,
Guangming District, Shenzhen, China.**Product description**

Product name..... : Smart Phone

Trademark : Blackview

Model Name : BL8800 Pro

Family Model : BL8800

Standards : ETSI EN 301 908-1 V13.1.1 (2019-11)
3GPP TS 38.521-1 (V15.3.0) (07-2019)
3GPP TS 38 521-3 V15.3.0 (2019-07)

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the of article 3.2 of the Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests..... Feb 18. 2022 ~ Mar 11. 2022

Date of Issue..... Mar 11. 2022

Test Result..... **Pass**

Testing Engineer :



(Mukzi Lee)

Authorized Signatory :



(Alex Li)

Table of Contents **Page**

1.SUMMARY OF TEST RESULTS 4

 1.1 TEST FACILITY 5

 1.2 MEASUREMENT UNCERTAINTY 5

2.GENERAL INFORMATION 6

 2.1 GENERAL DESCRIPTION OF EUT 6

 2.2 LIST OF TEST EQUIPMENTS 7

 2.3 TEST ENVIRONMENT/CONDITIONS 8

 2.4 TEST MODE 8

 2.5 TEST SETUP 15

3. SUMMARY OF THE REPORT 16

 3.1 TERMS IN THE COLUMN “VERDICT” FOR THE TEST RESULTS LIST OF THIS SECTION: 16

APPENDIX D—TEST DATA FOR SPURIOUS EMISSIONS 21

D.1. RADIATED SPURIOUS EMISSIONS FOR TRAFFIC MODE 22

D.2. RADIATED SPURIOUS EMISSIONS FOR IDLE MODE 136

D.3. CONTROL AND MONITORING FUNCTIONS (UE) 163

APPENDIX E—PHOTOGRAPHS OF THE TEST SETUP 164

1.SUMMARY OF TEST RESULTS

Leading Reference Documents For Testing:

No.	Identity	Document Title
1	ETSI EN 301 908-1 V13.1.1 (2019-11)	IMT cellular networks; Harmonised Standard covering the essential requirements of article 3.2 of the Directive 2014/53/EU; Part 1: Introduction and common requirements

Specific Reference Documents For Testing:

No.	Identity	Document Title
3	3GPP TS 38.521-1 (V15.3.0) (07-2019)	5G; NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 1: Range 1 Standalone
4	3GPP TS 38 521-3 V15.3.0 (2019-07)	5G;NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China

FCC Registered No.: 463705 IC Registered No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2.GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Trade Mark	Blackview
Model Name	BL8800 Pro
Family Model	BL8800
Model Difference	All the model are the same circuit and RF module,except the Model name.
Operation Bands:	NR FDD: n1, n3, n8,n20,n28 NR TDD: n38, n77, n78 EN-DC: DC_1A_n78A
Frequency Bands:	NR FDD n1: Uplink: 1920 MHz to 1980MHz Downlink: 2110 MHz to 2170 MHz NR FDD n3: Uplink: 1710 MHz to 1785 MHz Downlink: 1805 MHz to 1880 MHz NR FDD n8: Uplink: 880 MHz to 815 MHz Downlink: 925 MHz to 960 MHz NR FDD n20: Uplink: 832 MHz to 862 MHz Downlink: 791 MHz to 821 MHz NR FDD n28: Uplink: 703 MHz to 748 MHz Downlink: 758 MHz to 803 MHz NR TDD n38: Uplink & Downlink: 2570 MHz to 2620 MHz NR TDD n77: Uplink & Downlink: 3300 MHz to 4200 MHz NR TDD n78: Uplink & Downlink: 3300 MHz to 3800 MHz
Power Class:	NR :3
Modulation Mode:	DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM
Subcarrier spacing	<input type="checkbox"/> 15KHz, <input checked="" type="checkbox"/> 30KHz, <input type="checkbox"/> 60KHz
SIM CARD	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Adapter	Model: QA-0300CE03 Input: 100-240V~50/60Hz 0.8A Output: (PD)5.0V---3.0A or 9.0---3.0A or 12.0V---2.5A or 15.0V---2.0A or 20.0A---1.5A (PPS) 3.3A-11.0V---3.0A(33.0W MAX)
Battery	DC 3.85V, 8380mAh, 32.263Wh

Rating	DC 3.85V from battery or DC 5V from Adapter.
Antenna:	PIFA Antenna
Antenna Gain:	-0.9dBi
Hard Ware Version	TF929-B1-V1.1
Soft Ware Version	BL8800 Pro_EEA_TF929_V1.0

2.2 LIST OF TEST EQUIPMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.04.27	2022.04.26	1 year
2	Test Receiver	R&S	ESPI7	101318	2021.04.27	2022.04.26	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Spectrum Analyzer	Agilent	N9020A	MY46471732	2021.04.27	2022.04.26	1 year
6	Horn Antenna	EM	EM-AH-20180	2011071402	2021.03.29	2022.03.28	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2020.11.20	2021.11.19	1 year
8	Amplifier	EMC	EMC051835S E	980246	2021.07.01	2022.06.30	1 year
9	Loop Antenna	ARA	PLA-2030/B	1029	2021.04.27	2022.04.26	1 year
10	Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	2021.07.01	2022.06.30	1 year
11	LTE Wireless Communications Test Set	R&S	CMW500	1100.008.02	2021.03.29	2022.03.28	1 year
12	Power Splitter	Mini-Circuits	ZN2PD-63-S+	SF025101428	2020.04..07	2023.04.06	3 year
13	Wireless Communication Test	Anritsu	MT8821C	6262192315	2020.11.10	2021.11.09	1 year
14	Power Meter	DARE	RPR3006W	15I00041SNO8 4	2021.07.01	2022.06.30	1 year
15	ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2021.04.27	2022.04.26	1 year
16	Spectrum Analyzer	R&S	FSV40	101417	2020.08.07	2021.08.06	1 year
17	Radio Communication Analyzer	Anritsu	MT8821C	SN 6262186364	2020.10.13	2021.10.12	1 year
18	Radio Communication Test Station	Anritsu	MT8000A	SN 6262192315	2020.10.13	2021.10.12	1 year

2.3 TEST ENVIRONMENT/CONDITIONS

Normal Temperature (NT):	15 ... 35 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Details of Power Supply:	AC 100-240V~50/60Hz 0.6A
Extreme Temperature:	Low Temperature (LT) = -10°C High Temperature (HT) = +40°C
Extreme Voltage of the EUT (Declared by manufacturer):	Normal Voltage (NV) = DC 3.85V Low Voltage (LV) = DC 3.4V High Voltage (HV) = DC 4.2 V

Note: The High Voltage DC 4.2V and Low Voltage DC 3.4 V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage. The High temperature and Low temperature was declared by manufacturer.

2.4 TEST MODE

The following tests were completed according to the test requirements outlined in the 3GPP TS 38.521-1/3 specification. The EUT supports power Class 2 and Class 3, Power control set to All bits up. A summary of these settings are illustrated below:
 EUT supports SCS 15K, 30K, the report only shows the worst mode result

Test Mode	SCS	Band Width	Modulation Mode	Test Channel
NR: n1	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	385000
				390000
				395000
		15MHz		385500
				390000
				394500
		20MHz		386000
				390000
				394000

Test Mode	SCS	Band Width	Modulation Mode	Test Channel
NR: n3	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	343000
				349500
				356000
		20MHz		344000
				349500
				355000
		30MHz		345000
				349500
				354000

Test Mode	SCS	Band Width	Modulation Mode	Test Channel
NR: n8	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	177000
				179500
				182000
		15MHz		177500
				179500
				181500
		20MHz		178000
				179500
				181000

Test Mode	SCS	Band Width	Modulation Mode	Test Channel
NR: n20	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	167400
				169400
				171400
		15MHz		167900
				169400
				170900
		20MHz		168400
				169400
				170400

Test Mode	SCS	Band Width	Modulation Mode	Test Channel			
NR: n28	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	141600			
				145100			
				148600			
					15MHz		142100
						145100	
						148100	
					20MHz		142600
						145100	
						147600	

Test Mode	SCS	Band Width	Modulation Mode	Test Channel			
NR: n38	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	515000			
				519000			
				523000			
					15MHz	515500	
						519000	
						522500	
					20MHz		516000
						519000	
						522000	

Test Mode	SCS	Band Width	Modulation Mode	Test Channel			
NR: n77	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	620334			
				650000			
				679666			
					50MHz	621667	
						650000	
						678332	
					100MHz		623334
						650000	
						676666	

Test Mode	SCS	Band Width	Modulation Mode	Test Channel			
NR: n78	30K	10MHz	DFT-s-OFDM:PI/2BPSK/QPS K/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64 QAM/256QAM	620334			
				636666			
				653000			
					50MHz	621668	
						636666	
						651666	
					100MHz		623334
						636666	
						650000	

Test Mode	SCS	Band Width	Modulation Mode	LTE Test Channel	NR Test Channel
EN-DC: DC_1A_n78A	30K	5MHz	DFT-s-OFDM:PI/2BPSK/Q PSK/16-QAM/64QAM/256 QAM CP-OFDM:QPSK/16-QAM/ 64QAM/256QAM	Ch 18025	/
				Ch 18300	/
				Ch 18575	/
		10MHz		Ch 18050	620334
				Ch 18300	636666
		20MHz		Ch 18550	653000
				Ch 18100	/
				Ch 18300	/
		50MHz		Ch 18500	/
				/	621668
				/	636666
				/	651666
		100MHz		/	623334
				/	636666
/	650000				

Table 2


Test standard	test items	n1	n3	N8	N20	n28
		test Band Width				
		SCS 30K	SCS 30K	SCS 30K	SCS 30K	SCS 30K
ETSI EN 301908-1 4.2.2	Radiated emission (UE)	10MHz,	10MHz,	10MHz,	10MHz,	10MHz,
3GPP TS 38.521-1 6.2.1	Transmitter Maximum Output Power	10MHz, 15MHz, 20 MHz	10MHz, 20MHz, 30 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz
3GPP TS 38.521-1 6.3.1	Transmitter Minimum Output Power	10MHz, 15MHz, 20 MHz	10MHz, 20MHz, 30 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz
3GPP TS 38.521-1 6.5.2.2	Transmitter Spectrum Emission Mask	10MHz, 20 MHz	10MHz, 30 MHz	10MHz, 20 MHz	10MHz, 20 MHz	10MHz, 20 MHz
3GPP TS 38.521-1 6.5.2.4	Transmitter Adjacent Channel Leakage Power Ratio	10MHz, 20 MHz	10MHz, 30 MHz	10MHz, 20 MHz	10MHz, 20 MHz	10MHz, 20 MHz
3GPP TS 38.521-1 6.5.3.1 6.5.3.2 6.5.3.3	Transmitter Spurious Emissions	10MHz, 15MHz, 20 MHz	10MHz, 20MHz, 30 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz
3GPP TS 38.521-1 7.3.2	Receiver Reference Sensitivity Level	10MHz, 15MHz, 20 MHz	10MHz, 20MHz, 30 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz
3GPP TS 38.521-1 7.5	Receiver Adjacent Channel Selectivity (ACS)	10MHz, 15MHz, 20 MHz	10MHz, 20MHz, 30 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz
3GPP TS 38.521-1 7.6.2 7.6.3 7.6.4	Receiver Blocking Characteristics	10MHz, 15MHz, 20 MHz	10MHz, 20MHz, 30 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz
3GPP TS 38.521-1 7.7	Receiver Spurious Response	/	/	/	/	/
3GPP TS 38.521-1 7.8.2	Receiver Intermodulation Characteristic	10MHz, 15MHz, 20 MHz	10MHz, 20MHz, 30 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz	10MHz, 15MHz, 20 MHz
3GPP TS 38.521-1 7.9	Receiver Spurious Emissions	20 MHz	30 MHz	20 MHz	20 MHz	20 MHz

Test standard	test items	n38	n77	n78
		test Band Width		
		SCS 30K	SCS 30K	SCS 30K
ETSI EN 301908-1 4.2.2	Radiated emission (UE)	20MHz,	10 MHz	10 MHz
3GPP TS 38.521-1 6.2.1	Transmitter Maximum Output Power	20MHz,	10MHz, 50MHz, 100 MHz	10MHz, 50MHz, 100 MHz
3GPP TS 38.521-1 6.3.1	Transmitter Minimum Output Power	20MHz,	10MHz, 50MHz, 100 MHz	10MHz, 50MHz, 100 MHz
3GPP TS 38.521-1 6.5.2.2	Transmitter Spectrum Emission Mask	20MHz,	10MHz, 100 MHz	10MHz, 100 MHz
3GPP TS 38.521-1 6.5.2.4	Transmitter Adjacent Channel Leakage Power Ratio	20MHz,	10MHz, 100 MHz	10MHz, 100 MHz
3GPP TS 38.521-1 6.5.3.1 6.5.3.2 6.5.3.3	Transmitter Spurious Emissions	20MHz,	10MHz, 50MHz, 100 MHz	10MHz, 50MHz, 100 MHz
3GPP TS 38.521-1 7.3.2	Receiver Reference Sensitivity Level	20MHz,	10MHz, 50MHz, 100 MHz	10MHz, 50MHz, 100 MHz
3GPP TS 38.521-1 7.5	Receiver Adjacent Channel Selectivity (ACS)	20MHz,	10MHz, 50MHz, 100 MHz	10MHz, 50MHz, 100 MHz
3GPP TS 38.521-1 7.6.2 7.6.3 7.6.4	Receiver Blocking Characteristics	20MHz,	10MHz, 50MHz, 100 MHz	10MHz, 50MHz, 100 MHz
3GPP TS 38.521-1 7.7	Receiver Spurious Response	20MHz,	/	/
3GPP TS 38.521-1 7.8.2	Receiver Intermodulation Characteristic	20MHz,	10MHz, 50MHz, 100 MHz	10MHz, 50MHz, 100 MHz
3GPP TS 38.521-1 7.9	Receiver Spurious Emissions	20MHz,	100 MHz	100 MHz

Test standard	test items	EN-DC: DC_1A_n78A
		test Band Width
		SCS 30K
ETSI EN 301908-1 4.2.2	Radiated emission (UE)	10MHz,
3GPP TS 38.521-1 6.2.1	Transmitter Maximum Output Power	E-UTRA:5MHz + NR:10MHz E-UTRA:20MHz + NR:100MHz
3GPP TS 38.521-1 6.3.1	Transmitter Minimum Output Power	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:50MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 6.5.2.2	Transmitter Spectrum Emission Mask	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 6.5.2.4	Transmitter Adjacent Channel Leakage Power Ratio	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 6.5.3.1 6.5.3.2 6.5.3.3	Transmitter Spurious Emissions	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 7.3.2	Receiver Reference Sensitivity Level	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:50MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 7.5	Receiver Adjacent Channel Selectivity (ACS)	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:50MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 7.6.2 7.6.3 7.6.4	Receiver Blocking Characteristics	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:50MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 7.7	Receiver Spurious Response	/
3GPP TS 38.521-1 7.8.2	Receiver Intermodulation Characteristic	E-UTRA:5MHz + NR:10MHz E-UTRA:5MHz + NR:50MHz E-UTRA:5MHz + NR:100MHz
3GPP TS 38.521-1 7.9	Receiver Spurious Emissions	E-UTRA:20MHz + NR:100MHz

2.5 TEST SETUP


1. Radiated Spurious Emission Test Setup

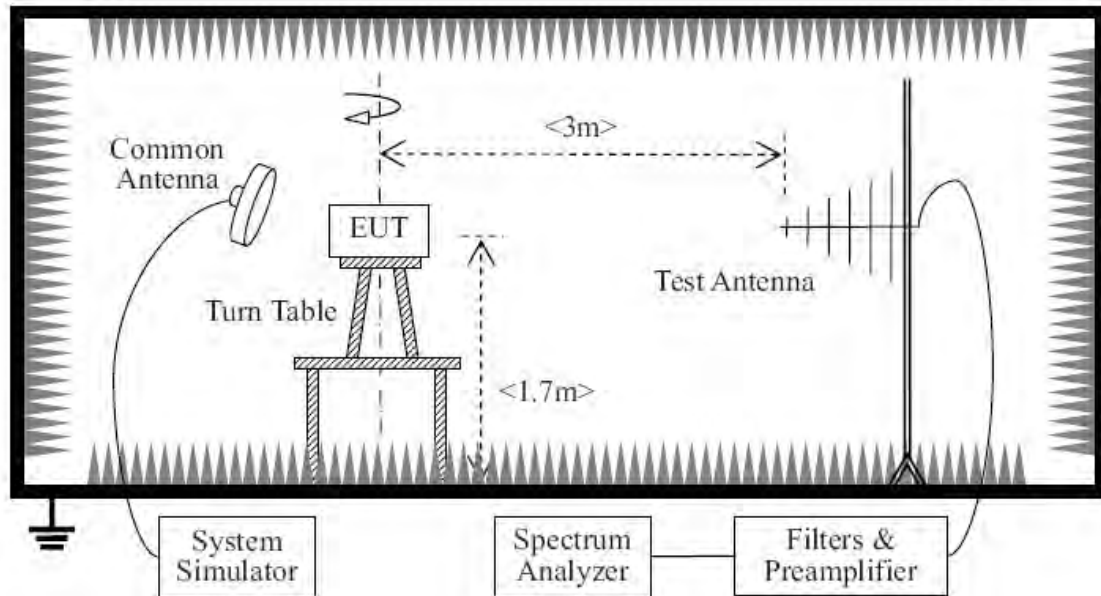

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. NR FDD band Power Control Level = 3), and only the test result of the maximum output power was recorded.

2. Conducted Test

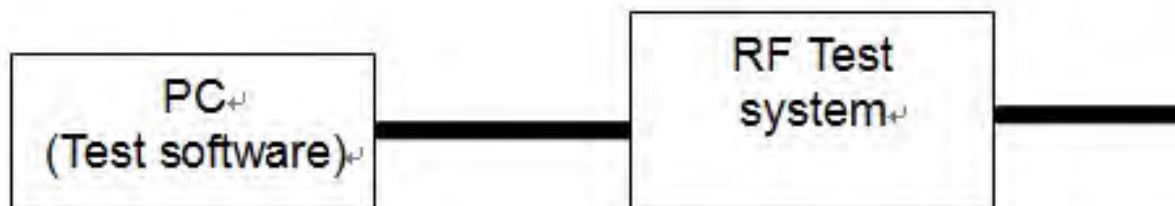

3. SUMMARY OF THE REPORT

3.1 TERMS IN THE COLUMN “VERDICT” FOR THE TEST RESULTS LIST OF THIS SECTION:

Verdict	Description
PASS	EUT passed this test case
FAIL	EUT failed this test case
Decl.	“Declaration”: NTEK has received documents from the applicant and/or manufacturer which show conformity to the applied standards for this test case.
N/A	Test case not applicable for the EUT, please see the column “Note” for detailed

Table 1 EN Requirements Table (Ref. ETSI EN 301 908-1 Annex A)

Testcase in ETSI EN 301908-1	Description	Condition	Test Band	Sample	Result	Test Data
4.2.2	Radiated emission (UE)	NTC	NR n1	A01	PASS	Ref. ETSI EN 301 908-1 Annex A)
			NR n3			
			NR n8			
			NR n20			
			NR n28			
			NR n38			
			NR n77			
			NR n78			
			EN-DC: DC_1A_n78A			
4.2.4	Control and monitoring functions (UE)	NTC	NR n1	A01	PASS	Ref. ETSI EN 301 908-1 Annex D.3)
			NR n3			
			NR n8			
			NR n20			
			NR n28			
			NR n38			
			NR n77			
			NR n78			
			EN-DC: DC_1A_n78A			

Table 2 EN Requirements Table (Ref. ETSI EN 301 908-25 Annex A)

The test data please refer to the APPENDIX A & APPENDIX B

NR:

Testcase in 3GPP TS 38.521-1	Corresponding test suite in 3GPP TS 38.521-1	Description	Condition	Test Band	Sample	Result	Test Data
6.2.1	6.2.1	Transmitter Maximum Output Power	NT / NV	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
			LT / LV		A01	PASS	Appendix B- NR- Extreme
			LT / HV		A01	PASS	Appendix B- NR- Extreme
			HT / LV		A01	PASS	Appendix B- NR- Extreme
			HT / HV		A01	PASS	Appendix B- NR- Extreme
6.3.1	6.3.1	Transmitter Minimum Output Power	NT / NV	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
			LT / LV		A01	PASS	Appendix B- NR- Extreme
			LT / HV		A01	PASS	Appendix B- NR- Extreme
			HT / LV		A01	PASS	Appendix B- NR- Extreme
			HT / HV		A01	PASS	Appendix B- NR- Extreme
6.5.2.2	6.5.2.2	Transmitter Spectrum Emission Mask	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
6.5.3.1	6.5.3.1	Transmitter Spurious Emissions	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
6.5.3.2	6.5.3.2						
6.5.3.3	6.5.3.3						
7.5	7.5	Receiver Adjacent Channel Selectivity (ACS)	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal

Testcase in 3GPP TS 38.521-1	Corresponding test suite in 3GPP TS 38.521-1	Description	Condition	Test Band	Sample	Result	Test Data
6.5.2.4	6.5.2.4	Transmitter Adjacent Channel Leakage Power Ratio	NT / NV	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
			LT / LV		A01	PASS	Appendix B- NR- Extreme
			LT / HV		A01	PASS	Appendix B- NR- Extreme
			HT / LV		A01	PASS	Appendix B- NR- Extreme
			HT / HV		A01	PASS	Appendix B- NR- Extreme
7.6.2	7.6.2	Receiver Blocking Characteristics (In band)	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix C - NR - Blocking
7.6.3 7.6.4	7.6.3 7.6.4	Receiver Blocking Characteristics (Out band)	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix C - NR - Blocking
7.7	7.7	Receiver Spurious Response	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
7.8.2	7.8.2	Receiver Intermodulation Characteristics	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
7.9	7.9	Receiver Spurious Emissions	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal
7.3.2	7.3.2	Receiver Reference Sensitivity Level	NTC	NR n1 NR n3 NR n8 NR n20 NR n28 NR n38 NR n77 NR n78	A01	PASS	Appendix A - NR - Normal

EN-DC:

Testcase in 3GPP TS 38 521-3	Corresponding test suite in 3GPP TS 38 521-3	Description	Condition	Test Band	Sample	Result	Test Data
6.2B.1.3	6.2B.1.3	Transmitter Maximum Output Power	NT / NV	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
			LT / LV		A01	PASS	Appendix B- EN-DC- Extreme
			LT / HV		A01	PASS	Appendix B- EN-DC- Extreme
			HT / LV		A01	PASS	Appendix B- EN-DC- Extreme
			HT / HV		A01	PASS	Appendix B- EN-DC- Extreme
6.3B.1.3	6.3B.1.3	Transmitter Minimum Output Power	NT / NV	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
			LT / LV		A01	PASS	Appendix B- EN-DC- Extreme
			LT / HV		A01	PASS	Appendix B- EN-DC- Extreme
			HT / LV		A01	PASS	Appendix B- EN-DC- Extreme
			HT / HV		A01	PASS	Appendix B- EN-DC- Extreme
6.5B.2.3	6.5B.2.3	Transmitter Spectrum Emission Mask	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
6.5B.3.3.1	6.5B.3.3.1	Transmitter	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
6.5B.3.3.2	6.5B.3.3.2	Spurious					
6.5B.4.3	6.5B.4.3	Emissions					
7.5B.3	7.5B.3	Receiver Adjacent Channel Selectivity (ACS)	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal

Testcase in 3GPP TS 38 521-3	Corresponding test suite in 3GPP TS 38 521-3	Description	Condition	Test Band	Sample	Result	Test Data
6.5B.2.3.3	6.5B.2.3.3	Transmitter Adjacent Channel Leakage Power Ratio	NT / NV	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
			LT / LV		A01	PASS	Appendix B- EN-DC- Extreme
			LT / HV		A01	PASS	Appendix B- EN-DC- Extreme
			HT / LV		A01	PASS	Appendix B- EN-DC- Extreme
			HT / HV		A01	PASS	Appendix B- EN-DC- Extreme
7.6B.2.3	7.6B.2.3	Receiver Blocking Characteristics (In band)	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix C -EN-DC- Blocking
7.6B.3.3 7.6B.4.3	7.6B.3.3 7.6B.4.3	Receiver Blocking Characteristics (Out band)	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix C -EN-DC- Blocking
7.7B.3	7.7B.3	Receiver Spurious Response	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
7.8B.2.3	7.8B.2.3	Receiver Intermodulation Characteristics	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
7.9B.3	7.9B.3	Receiver Spurious Emissions	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal
7.3B.2.3	7.3B.2.3	Receiver Reference Sensitivity Level	NTC	EN-DC: DC_1A_n78A	A01	PASS	Appendix A - EN-DC - Normal

APPENDIX D—TEST DATA FOR SPURIOUS EMISSIONS

D.1. RADIATED SPURIOUS EMISSIONS FOR TRAFFIC MODE

n1 CH L 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
37.68	-69.37	3.91	-65.46	-36	-29.46	PASS
194.16	-65.94	6.95	-58.99	-36	-22.99	PASS
284.79	-66.33	9.27	-57.06	-36	-21.06	PASS
877.59	-63.7	9.75	-53.95	-36	-17.95	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH L 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1093.97	-53.95	18.05	-35.90	-30	-5.90	PASS
2977.33	-69.43	15.75	-53.68	-30	-23.68	PASS
3804.37	-58.62	13.06	-45.56	-30	-15.56	PASS
9050.33	-60.67	12.52	-48.15	-30	-18.15	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH L 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
51.79	-62.16	3.91	-58.25	-36	-22.25	PASS
91.92	-78.9	6.95	-71.95	-36	-35.95	PASS
278.62	-77.94	9.27	-68.67	-36	-32.67	PASS
860.81	-59.33	9.75	-49.58	-36	-13.58	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH L 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1270.36	-54.91	18.05	-36.86	-30	-6.86	PASS
2490.38	-49.95	15.75	-34.20	-30	-4.20	PASS
3842.48	-64.89	13.06	-51.83	-30	-21.83	PASS
10546.47	-60.43	12.52	-47.91	-30	-17.91	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH M 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
61.95	-77.79	3.91	-73.88	-36	-37.88	PASS
90.42	-74.39	6.95	-67.44	-36	-31.44	PASS
531.22	-64.53	9.27	-55.26	-36	-19.26	PASS
885.94	-69.62	9.75	-59.87	-36	-23.87	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH M 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1031.50	-64.2	18.05	-46.15	-30	-16.15	PASS
2888.98	-57.29	15.75	-41.54	-30	-11.54	PASS
3189.59	-66.96	13.06	-53.90	-30	-23.90	PASS
9259.15	-49.58	12.52	-37.06	-30	-7.06	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH M 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.44	-72.67	3.91	-68.76	-36	-32.76	PASS
131.64	-72.74	6.95	-65.79	-36	-29.79	PASS
436.08	-61.01	9.27	-51.74	-36	-15.74	PASS
700.10	-63.91	9.75	-54.16	-36	-18.16	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH M 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1557.94	-66.53	18.05	-48.48	-30	-18.48	PASS
2003.15	-62.04	15.75	-46.29	-30	-16.29	PASS
3775.74	-52.55	13.06	-39.49	-30	-9.49	PASS
9230.88	-57.09	12.52	-44.57	-30	-14.57	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
51.79	-66.38	3.91	-62.47	-36	-26.47	PASS
108.90	-77.06	6.95	-70.11	-36	-34.11	PASS
457.10	-75.38	9.27	-66.11	-36	-30.11	PASS
636.73	-69.86	9.75	-60.11	-36	-24.11	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1100.25	-58.96	18.05	-40.91	-30	-10.91	PASS
2047.78	-68.85	15.75	-53.10	-30	-23.10	PASS
3473.82	-59.3	13.06	-46.24	-30	-16.24	PASS
4857.17	-62.22	12.52	-49.70	-30	-19.70	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
63.90	-67.58	3.91	-63.67	-36	-27.67	PASS
186.38	-76.27	6.95	-69.32	-36	-33.32	PASS
506.42	-65.79	9.27	-56.52	-36	-20.52	PASS
879.89	-62.44	9.75	-52.69	-36	-16.69	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1013.26	-66.3	18.05	-48.25	-30	-18.25	PASS
2490.18	-61.8	15.75	-46.05	-30	-16.05	PASS
3906.55	-49.63	13.06	-36.57	-30	-6.57	PASS
9561.41	-60.1	12.52	-47.58	-30	-17.58	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
50.31	-76.96	3.91	-73.05	-36	-37.05	PASS
97.96	-64.15	6.95	-57.20	-36	-21.20	PASS
400.34	-59.67	9.27	-50.40	-36	-14.40	PASS
795.25	-77.07	9.75	-67.32	-36	-31.32	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1132.73	-63.45	18.05	-45.40	-30	-15.40	PASS
2310.00	-68.65	15.75	-52.90	-30	-22.90	PASS
3621.98	-50.34	13.06	-37.28	-30	-7.28	PASS
11205.42	-60.96	12.52	-48.44	-30	-18.44	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
54.67	-74.34	3.91	-70.43	-36	-34.43	PASS
154.63	-60.38	6.95	-53.43	-36	-17.43	PASS
278.30	-77.02	9.27	-67.75	-36	-31.75	PASS
625.11	-70.56	9.75	-60.81	-36	-24.81	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n1 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1994.84	-64.79	18.05	-46.74	-30	-16.74	PASS
2342.29	-52.61	15.75	-36.86	-30	-6.86	PASS
3264.50	-60.77	13.06	-47.71	-30	-17.71	PASS
7396.19	-59.69	12.52	-47.17	-30	-17.17	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n1 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
37.06	-51.68	2.35	-49.33	-36	-13.33	PASS
178.76	-65.65	1.38	-64.27	-36	-28.27	PASS
264.68	-54.17	5.45	-48.72	-36	-12.72	PASS
644.98	-53.10	1.45	-51.65	-36	-15.65	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1320.45	-59.93	14.81	-45.12	-30	-15.12	PASS
2548.46	-67.48	15.91	-51.57	-30	-21.57	PASS
3250.99	-59.68	14.93	-44.75	-30	-14.75	PASS
7292.19	-51.39	16.55	-34.84	-30	-4.84	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
81.82	-68.00	5.93	-62.07	-36	-26.07	PASS
166.80	-61.07	9.25	-51.82	-36	-15.82	PASS
461.95	-55.13	4.35	-50.78	-36	-14.78	PASS
747.49	-49.07	8.47	-40.60	-36	-4.60	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1234.94	-59.86	18.25	-41.61	-30	-11.61	PASS
2663.03	-62.55	18.87	-43.68	-30	-13.68	PASS
3698.00	-66.60	13.86	-52.74	-30	-22.74	PASS
11511.73	-53.62	10.24	-43.38	-30	-13.38	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
48.40	-56.34	6.38	-49.96	-36	-13.96	PASS
106.78	-63.61	8.65	-54.96	-36	-18.96	PASS
311.78	-63.20	1.51	-61.69	-36	-25.69	PASS
784.72	-69.38	9.03	-60.35	-36	-24.35	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n1 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1403.10	-58.75	11.72	-47.03	-30	-17.03	PASS
2794.71	-61.21	15.95	-45.26	-30	-15.26	PASS
3153.34	-51.05	12.25	-38.80	-30	-8.80	PASS
8821.62	-55.10	15.98	-39.12	-30	-9.12	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n1 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
49.12	-63.69	1.69	-62.00	-36	-26.00	PASS
175.93	-57.81	3.80	-54.01	-36	-18.01	PASS
498.76	-67.13	3.93	-63.20	-36	-27.20	PASS
870.48	-66.45	8.89	-57.56	-36	-21.56	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n1 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1185.84	-59.23	15.40	-43.83	-30	-13.83	PASS
2254.39	-51.74	14.23	-37.51	-30	-7.51	PASS
3259.59	-63.12	18.65	-44.47	-30	-14.47	PASS
10629.10	-57.36	16.16	-41.20	-30	-11.20	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

Note: This report records the worst test results, test results only QPSK Mode worst.

n3 CH H 1.4M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
53.66	-75.43	3.91	-71.52	-36	-35.52	PASS
164.86	-78.89	6.95	-71.94	-36	-35.94	PASS
215.49	-62.94	9.27	-53.67	-36	-17.67	PASS
849.27	-70.25	9.75	-60.50	-36	-24.50	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1050.09	-62.15	18.05	-44.10	-30	-14.10	PASS
2085.68	-49.65	15.75	-33.90	-30	-3.90	PASS
3233.61	-66.95	13.06	-53.89	-30	-23.89	PASS
4411.82	-65.81	12.52	-53.29	-30	-23.29	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
63.42	-67.78	3.91	-63.87	-36	-27.87	PASS
130.15	-59.91	6.95	-52.96	-36	-16.96	PASS
420.00	-64.56	9.27	-55.29	-36	-19.29	PASS
699.73	-60.50	9.75	-50.75	-36	-14.75	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1671.97	-59.33	18.05	-41.28	-30	-11.28	PASS
2154.20	-60.29	15.75	-44.54	-30	-14.54	PASS
3633.19	-62.19	13.06	-49.13	-30	-19.13	PASS
10262.95	-64.38	12.52	-51.86	-30	-21.86	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
68.93	-64.42	3.91	-60.51	-36	-24.51	PASS
174.17	-66.87	6.95	-59.92	-36	-23.92	PASS
423.17	-59.81	9.27	-50.54	-36	-14.54	PASS
676.57	-62.85	9.75	-53.10	-36	-17.10	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1143.33	-60.98	18.05	-42.93	-30	-12.93	PASS
2563.94	-55.74	15.75	-39.99	-30	-9.99	PASS
3919.28	-65.16	13.06	-52.10	-30	-22.10	PASS
8284.38	-49.75	12.52	-37.23	-30	-7.23	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
75.60	-75.75	3.91	-71.84	-36	-35.84	PASS
100.60	-75.01	6.95	-68.06	-36	-32.06	PASS
200.10	-59.71	9.27	-50.44	-36	-14.44	PASS
709.74	-75.55	9.75	-65.80	-36	-29.80	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1179.18	-52.23	18.05	-34.18	-30	-4.18	PASS
2338.57	-54.09	15.75	-38.34	-30	-8.34	PASS
3256.98	-50.72	13.06	-37.66	-30	-7.66	PASS
11790.75	-56.02	12.52	-43.50	-30	-13.50	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
31.26	-76.20	3.91	-72.29	-36	-36.29	PASS
119.26	-64.34	6.95	-57.39	-36	-21.39	PASS
377.19	-61.44	9.27	-52.17	-36	-16.17	PASS
858.59	-60.98	9.75	-51.23	-36	-15.23	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1343.85	-50.74	18.05	-32.69	-30	-2.69	PASS
2124.21	-52.5	15.75	-36.75	-30	-6.75	PASS
3759.26	-57.09	13.06	-44.03	-30	-14.03	PASS
8812.10	-65.78	12.52	-53.26	-30	-23.26	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
68.28	-78.81	3.91	-74.90	-36	-38.90	PASS
115.80	-73.32	6.95	-66.37	-36	-30.37	PASS
315.95	-78.94	9.27	-69.67	-36	-33.67	PASS
788.62	-63.45	9.75	-53.70	-36	-17.70	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 1.4M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1842.02	-59.58	18.05	-41.53	-30	-11.53	PASS
2950.59	-51.17	15.75	-35.42	-30	-5.42	PASS
3997.08	-59.06	13.06	-46.00	-30	-16.00	PASS
8132.11	-52.75	12.52	-40.23	-30	-10.23	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
62.22	-75.96	3.91	-72.05	-36	-36.05	PASS
108.61	-75.64	6.95	-68.69	-36	-32.69	PASS
494.99	-76.36	9.27	-67.09	-36	-31.09	PASS
612.80	-62.20	9.75	-52.45	-36	-16.45	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1298.42	-69.94	18.05	-51.89	-30	-21.89	PASS
2334.73	-51.56	15.75	-35.81	-30	-5.81	PASS
3816.08	-69	13.06	-55.94	-30	-25.94	PASS
11449.48	-57.39	12.52	-44.87	-30	-14.87	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
83.57	-79.01	3.91	-75.10	-36	-39.10	PASS
158.04	-75.82	6.95	-68.87	-36	-32.87	PASS
289.02	-62.46	9.27	-53.19	-36	-17.19	PASS
676.31	-77.04	9.75	-67.29	-36	-31.29	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1634.22	-65.64	18.05	-47.59	-30	-17.59	PASS
2641.06	-53.91	15.75	-38.16	-30	-8.16	PASS
3892.28	-64.72	13.06	-51.66	-30	-21.66	PASS
6300.18	-64.8	12.52	-52.28	-30	-22.28	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
31.42	-71.81	3.91	-67.90	-36	-31.90	PASS
175.64	-62.78	6.95	-55.83	-36	-19.83	PASS
335.10	-75.80	9.27	-66.53	-36	-30.53	PASS
742.15	-65.06	9.75	-55.31	-36	-19.31	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1430.54	-55.81	18.05	-37.76	-30	-7.76	PASS
2563.10	-59.87	15.75	-44.12	-30	-14.12	PASS
3307.86	-59.6	13.06	-46.54	-30	-16.54	PASS
10141.31	-57.51	12.52	-44.99	-30	-14.99	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
67.71	-79.53	3.91	-75.62	-36	-39.62	PASS
178.42	-67.83	6.95	-60.88	-36	-24.88	PASS
337.43	-64.37	9.27	-55.10	-36	-19.10	PASS
754.96	-63.45	9.75	-53.70	-36	-17.70	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1655.86	-50.83	18.05	-32.78	-30	-2.78	PASS
2949.16	-54.55	15.75	-38.80	-30	-8.80	PASS
3295.26	-58.43	13.06	-45.37	-30	-15.37	PASS
11227.62	-62.38	12.52	-49.86	-30	-19.86	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
54.78	-68.69	3.91	-64.78	-36	-28.78	PASS
105.99	-60.75	6.95	-53.80	-36	-17.80	PASS
563.83	-77.26	9.27	-67.99	-36	-31.99	PASS
773.50	-73.53	9.75	-63.78	-36	-27.78	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1710.38	-50.28	18.05	-32.23	-30	-2.23	PASS
2876.41	-51.54	15.75	-35.79	-30	-5.79	PASS
3476.97	-54.71	13.06	-41.65	-30	-11.65	PASS
10425.23	-62.04	12.52	-49.52	-30	-19.52	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
31.39	-65.96	3.91	-62.05	-36	-26.05	PASS
121.12	-78.64	6.95	-71.69	-36	-35.69	PASS
331.83	-68.42	9.27	-59.15	-36	-23.15	PASS
821.43	-71.42	9.75	-61.67	-36	-25.67	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1915.44	-65.07	18.05	-47.02	-30	-17.02	PASS
2376.63	-64.71	15.75	-48.96	-30	-18.96	PASS
3346.27	-67.98	13.06	-54.92	-30	-24.92	PASS
10699.77	-60.03	12.52	-47.51	-30	-17.51	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
65.27	-59.11	3.91	-55.20	-36	-19.20	PASS
167.90	-68.05	6.95	-61.10	-36	-25.10	PASS
488.75	-71.16	9.27	-61.89	-36	-25.89	PASS
754.12	-75.25	9.75	-65.50	-36	-29.50	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1744.57	-67.35	18.05	-49.30	-30	-19.30	PASS
2671.07	-65.05	15.75	-49.30	-30	-19.30	PASS
3074.77	-67.67	13.06	-54.61	-30	-24.61	PASS
4475.43	-54.24	12.52	-41.72	-30	-11.72	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
67.08	-68.65	3.91	-64.74	-36	-28.74	PASS
121.29	-79.31	6.95	-72.36	-36	-36.36	PASS
407.33	-69.75	9.27	-60.48	-36	-24.48	PASS
746.17	-67.91	9.75	-58.16	-36	-22.16	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1871.08	-63.29	18.05	-45.24	-30	-15.24	PASS
2406.47	-65.8	15.75	-50.05	-30	-20.05	PASS
3815.13	-67.06	13.06	-54.00	-30	-24.00	PASS
9024.33	-60.6	12.52	-48.08	-30	-18.08	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
57.14	-68.55	3.91	-64.64	-36	-28.64	PASS
190.77	-67.61	6.95	-60.66	-36	-24.66	PASS
348.84	-63.44	9.27	-54.17	-36	-18.17	PASS
852.54	-69.92	9.75	-60.17	-36	-24.17	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1812.55	-62.8	18.05	-44.75	-30	-14.75	PASS
2647.54	-68.09	15.75	-52.34	-30	-22.34	PASS
3597.74	-60.59	13.06	-47.53	-30	-17.53	PASS
9883.64	-62.13	12.52	-49.61	-30	-19.61	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
62.67	-63.81	3.91	-59.90	-36	-23.90	PASS
186.04	-62.38	6.95	-55.43	-36	-19.43	PASS
464.32	-74.83	9.27	-65.56	-36	-29.56	PASS
877.47	-65.14	9.75	-55.39	-36	-19.39	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1019.62	-56.49	18.05	-38.44	-30	-8.44	PASS
2814.80	-63.69	15.75	-47.94	-30	-17.94	PASS
3027.86	-66.24	13.06	-53.18	-30	-23.18	PASS
6878.11	-52.88	12.52	-40.36	-30	-10.36	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
80.41	-62.93	3.91	-59.02	-36	-23.02	PASS
197.81	-74.89	6.95	-67.94	-36	-31.94	PASS
253.24	-62.15	9.27	-52.88	-36	-16.88	PASS
816.07	-64.03	9.75	-54.28	-36	-18.28	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1614.97	-65.25	18.05	-47.20	-30	-17.20	PASS
2878.62	-51.05	15.75	-35.30	-30	-5.30	PASS
3491.69	-49.15	13.06	-36.09	-30	-6.09	PASS
10859.85	-60.16	12.52	-47.64	-30	-17.64	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
32.53	-78.02	3.91	-74.11	-36	-38.11	PASS
99.96	-73.81	6.95	-66.86	-36	-30.86	PASS
576.12	-72.71	9.27	-63.44	-36	-27.44	PASS
840.94	-62.11	9.75	-52.36	-36	-16.36	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n3 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1976.21	-61.22	18.05	-43.17	-30	-13.17	PASS
2058.42	-56.46	15.75	-40.71	-30	-10.71	PASS
3652.03	-56.1	13.06	-43.04	-30	-13.04	PASS
8373.05	-64.64	12.52	-52.12	-30	-22.12	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

Note: This report records the worst test results, test results only QPSK Mode worst.

n8 CH L 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
40.30	-62.38	3.91	-58.47	-36	-22.47	PASS
180.03	-72.79	6.95	-65.84	-36	-29.84	PASS
522.84	-77.57	9.27	-68.30	-36	-32.30	PASS
868.11	-74.83	9.75	-65.08	-36	-29.08	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH L 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1491.10	-62.22	18.05	-44.17	-30	-14.17	PASS
2025.65	-67.53	15.75	-51.78	-30	-21.78	PASS
3266.13	-59.49	13.06	-46.43	-30	-16.43	PASS
8127.53	-49.02	12.52	-36.50	-30	-6.50	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH L 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
58.39	-68.56	3.91	-64.65	-36	-28.65	PASS
151.11	-79.30	6.95	-72.35	-36	-36.35	PASS
573.07	-76.13	9.27	-66.86	-36	-30.86	PASS
894.38	-76.58	9.75	-66.83	-36	-30.83	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH L 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1028.86	-65.78	18.05	-47.73	-30	-17.73	PASS
2094.59	-60.03	15.75	-44.28	-30	-14.28	PASS
3574.07	-59	13.06	-45.94	-30	-15.94	PASS
7053.80	-60.94	12.52	-48.42	-30	-18.42	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH M 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
43.77	-76.15	3.91	-72.24	-36	-36.24	
177.90	-59.97	6.95	-53.02	-36	-17.02	PASS
349.25	-66.09	9.27	-56.82	-36	-20.82	PASS
820.72	-62.94	9.75	-53.19	-36	-17.19	PASS
43.77	-76.15	3.91	-72.24	-36	-36.24	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH M 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1048.28	-69.78	18.05	-51.73	-30	-21.73	PASS
2719.87	-69.42	15.75	-53.67	-30	-23.67	PASS
3163.03	-55.96	13.06	-42.90	-30	-12.90	PASS
9248.09	-68.14	12.52	-55.62	-30	-25.62	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH M 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
63.47	-61.48	3.91	-57.57	-36	-21.57	PASS
120.02	-69.22	6.95	-62.27	-36	-26.27	PASS
244.22	-59.85	9.27	-50.58	-36	-14.58	PASS
705.86	-66.55	9.75	-56.80	-36	-20.80	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH M 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1413.80	-52.88	18.05	-34.83	-30	-4.83	PASS
2881.02	-56.91	15.75	-41.16	-30	-11.16	PASS
3248.16	-51.66	13.06	-38.60	-30	-8.60	PASS
10406.81	-57.73	12.52	-45.21	-30	-15.21	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
76.66	-60.97	3.91	-57.06	-36	-21.06	PASS
159.51	-61.58	6.95	-54.63	-36	-18.63	PASS
472.91	-70.63	9.27	-61.36	-36	-25.36	PASS
607.90	-61.23	9.75	-51.48	-36	-15.48	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1361.02	-66.91	18.05	-48.86	-30	-18.86	PASS
2143.06	-55.63	15.75	-39.88	-30	-9.88	PASS
3992.18	-54.64	13.06	-41.58	-30	-11.58	PASS
4361.81	-56.78	12.52	-44.26	-30	-14.26	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
73.63	-60.04	3.91	-56.13	-36	-20.13	PASS
195.94	-59.21	6.95	-52.26	-36	-16.26	PASS
337.81	-69.81	9.27	-60.54	-36	-24.54	PASS
850.16	-77.71	9.75	-67.96	-36	-31.96	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1770.10	-50.09	18.05	-32.04	-30	-2.04	PASS
2283.52	-61.07	15.75	-45.32	-30	-15.32	PASS
3275.73	-63.37	13.06	-50.31	-30	-20.31	PASS
11773.69	-63.11	12.52	-50.59	-30	-20.59	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
81.95	-59.98	3.91	-56.07	-36	-20.07	PASS
164.83	-70.45	6.95	-63.50	-36	-27.50	PASS
309.22	-60.08	9.27	-50.81	-36	-14.81	PASS
686.65	-78.40	9.75	-68.65	-36	-32.65	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1679.21	-68.16	18.05	-50.11	-30	-20.11	PASS
2834.48	-51.09	15.75	-35.34	-30	-5.34	PASS
3044.23	-58.24	13.06	-45.18	-30	-15.18	PASS
7091.43	-69.96	12.52	-57.44	-30	-27.44	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
63.44	-74.62	3.91	-70.71	-36	-34.71	PASS
144.08	-77.16	6.95	-70.21	-36	-34.21	PASS
465.08	-69.87	9.27	-60.60	-36	-24.60	PASS
751.29	-65.33	9.75	-55.58	-36	-19.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n8 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1016.00	-54	18.05	-35.95	-30	-5.95	PASS
2206.23	-52.21	15.75	-36.46	-30	-6.46	PASS
3550.53	-56.28	13.06	-43.22	-30	-13.22	PASS
11948.58	-51.91	12.52	-39.39	-30	-9.39	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n8 CH H 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
78.57	-64.92	3.91	-61.01	-36	-25.01	PASS
117.74	-73.96	6.95	-67.01	-36	-31.01	PASS
356.43	-62.91	9.27	-53.64	-36	-17.64	PASS
659.38	-68.74	9.75	-58.99	-36	-22.99	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1935.07	-49.8	18.05	-31.75	-30	-1.75	PASS
2897.23	-53.99	15.75	-38.24	-30	-8.24	PASS
3509.15	-64.88	13.06	-51.82	-30	-21.82	PASS
7154.33	-57.33	12.52	-44.81	-30	-14.81	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
60.36	-73.76	3.91	-69.85	-36	-33.85	PASS
97.71	-62.01	6.95	-55.06	-36	-19.06	PASS
476.25	-68.87	9.27	-59.60	-36	-23.60	PASS
652.43	-77.34	9.75	-67.59	-36	-31.59	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1025.80	-67.38	18.05	-49.33	-30	-19.33	PASS
2747.67	-57	15.75	-41.25	-30	-11.25	PASS
3992.65	-57.9	13.06	-44.84	-30	-14.84	PASS
11075.59	-62.47	12.52	-49.95	-30	-19.95	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n8 CH H 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
68.12	-73.44	3.91	-69.53	-36	-33.53	PASS
159.90	-76.48	6.95	-69.53	-36	-33.53	PASS
585.84	-75.05	9.27	-65.78	-36	-29.78	PASS
724.38	-70.32	9.75	-60.57	-36	-24.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n8 CH H 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1997.76	-59.02	18.05	-40.97	-30	-10.97	PASS
2633.01	-64.94	15.75	-49.19	-30	-19.19	PASS
3931.00	-55.03	13.06	-41.97	-30	-11.97	PASS
5750.10	-50.35	12.52	-37.83	-30	-7.83	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n8 CH H 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
71.88	-74.67	3.91	-70.76	-36	-34.76	PASS
133.85	-64.39	6.95	-57.44	-36	-21.44	PASS
282.19	-65.27	9.27	-56.00	-36	-20.00	PASS
686.93	-71.29	9.75	-61.54	-36	-25.54	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n8 CH H 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1346.12	-66.43	18.05	-48.38	-30	-18.38	PASS
2501.67	-54.54	15.75	-38.79	-30	-8.79	PASS
3622.87	-59.13	13.06	-46.07	-30	-16.07	PASS
4130.99	-54.36	12.52	-41.84	-30	-11.84	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

n20 CH L 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
49.18	-67.78	3.91	-63.87	-36	-27.87	PASS
181.75	-65.77	6.95	-58.82	-36	-22.82	PASS
454.78	-66.60	9.27	-57.33	-36	-21.33	PASS
766.38	-71.61	9.75	-61.86	-36	-25.86	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n20 CH L 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1450.48	-65.09	18.05	-47.04	-30	-17.04	PASS
2175.01	-61.65	15.75	-45.90	-30	-15.90	PASS
3896.78	-64.87	13.06	-51.81	-30	-21.81	PASS
7667.00	-60.18	12.52	-47.66	-30	-17.66	PASS
9705.35	-59.29	12.52	-46.77	-30	-16.77	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n20 CH L 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
78.86	-72.21	3.91	-68.30	-36	-32.30	PASS
120.50	-79.15	6.95	-72.20	-36	-36.20	PASS
391.92	-68.57	9.27	-59.30	-36	-23.30	PASS
624.29	-67.35	9.75	-57.60	-36	-21.60	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH L 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1015.49	-49.88	18.05	-31.83	-30	-1.83	PASS
2889.82	-57.48	15.75	-41.73	-30	-11.73	PASS
3187.38	-67.53	13.06	-54.47	-30	-24.47	PASS
11788.33	-61.31	12.52	-48.79	-30	-18.79	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH M 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
53.51	-73.60	3.91	-69.69	-36	-33.69	PASS
100.67	-68.46	6.95	-61.51	-36	-25.51	PASS
377.66	-62.15	9.27	-52.88	-36	-16.88	PASS
754.90	-74.92	9.75	-65.17	-36	-29.17	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH M 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1422.73	-64.52	18.05	-46.47	-30	-16.47	PASS
2084.89	-53.22	15.75	-37.47	-30	-7.47	PASS
3873.39	-57.69	13.06	-44.63	-30	-14.63	PASS
11036.37	-51.14	12.52	-38.62	-30	-8.62	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH M 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
46.79	-65.75	3.91	-61.84	-36	-25.84	PASS
140.17	-74.79	6.95	-67.84	-36	-31.84	PASS
476.00	-72.77	9.27	-63.50	-36	-27.50	PASS
675.92	-69.26	9.75	-59.51	-36	-23.51	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH M 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1305.22	-55.71	18.05	-37.66	-30	-7.66	PASS
2195.57	-65.59	15.75	-49.84	-30	-19.84	PASS
3759.90	-58.08	13.06	-45.02	-30	-15.02	PASS
6419.34	-64.7	12.52	-52.18	-30	-22.18	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.01	-75.95	3.91	-72.04	-36	-36.04	PASS
130.08	-65.64	6.95	-58.69	-36	-22.69	PASS
309.26	-78.48	9.27	-69.21	-36	-33.21	PASS
717.94	-67.73	9.75	-57.98	-36	-21.98	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1308.60	-60.27	18.05	-42.22	-30	-12.22	PASS
2246.76	-62.74	15.75	-46.99	-30	-16.99	PASS
3266.95	-65.02	13.06	-51.96	-30	-21.96	PASS
8214.72	-53.47	12.52	-40.95	-30	-10.95	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
45.00	-68.57	3.91	-64.66	-36	-28.66	PASS
178.70	-78.46	6.95	-71.51	-36	-35.51	PASS
267.89	-64.58	9.27	-55.31	-36	-19.31	PASS
688.22	-63.13	9.75	-53.38	-36	-17.38	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1502.10	-63.98	18.05	-45.93	-30	-15.93	PASS
2483.14	-69.74	15.75	-53.99	-30	-23.99	PASS
3081.67	-49.38	13.06	-36.32	-30	-6.32	PASS
9925.05	-58.02	12.52	-45.50	-30	-15.50	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
48.47	-78.72	3.91	-74.81	-36	-38.81	PASS
188.23	-63.02	6.95	-56.07	-36	-20.07	PASS
366.87	-63.53	9.27	-54.26	-36	-18.26	PASS
626.35	-73.68	9.75	-63.93	-36	-27.93	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1640.40	-49.59	18.05	-31.54	-30	-1.54	PASS
2436.46	-53.9	15.75	-38.15	-30	-8.15	PASS
3901.29	-51.54	13.06	-38.48	-30	-8.48	PASS
8768.83	-61.06	12.52	-48.54	-30	-18.54	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
50.79	-73.24	3.91	-69.33	-36	-33.33	PASS
125.88	-78.58	6.95	-71.63	-36	-35.63	PASS
216.94	-70.84	9.27	-61.57	-36	-25.57	PASS
620.93	-59.63	9.75	-49.88	-36	-13.88	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1367.63	-64.41	18.05	-46.36	-30	-16.36	PASS
2158.13	-63.16	15.75	-47.41	-30	-17.41	PASS
3179.41	-60.4	13.06	-47.34	-30	-17.34	PASS
10773.87	-58.58	12.52	-46.06	-30	-16.06	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
87.25	-76.88	3.91	-72.97	-36	-36.97	PASS
105.08	-77.35	6.95	-70.40	-36	-34.40	PASS
502.59	-75.83	9.27	-66.56	-36	-30.56	PASS
882.98	-61.71	9.75	-51.96	-36	-15.96	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1860.17	-53.71	18.05	-35.66	-30	-5.66	PASS
2876.51	-50.82	15.75	-35.07	-30	-5.07	PASS
3638.34	-62.44	13.06	-49.38	-30	-19.38	PASS
11553.57	-60.65	12.52	-48.13	-30	-18.13	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
69.18	-78.70	3.91	-74.79	-36	-38.79	PASS
181.07	-72.56	6.95	-65.61	-36	-29.61	PASS
496.89	-64.57	9.27	-55.30	-36	-19.30	PASS
627.34	-68.11	9.75	-58.36	-36	-22.36	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1128.24	-62.2	18.05	-44.15	-30	-14.15	PASS
2233.53	-69.3	15.75	-53.55	-30	-23.55	PASS
3343.77	-61.56	13.06	-48.50	-30	-18.50	PASS
8022.45	-69.27	12.52	-56.75	-30	-26.75	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.47	-79.51	3.91	-75.60	-36	-39.60	PASS
192.51	-63.45	6.95	-56.50	-36	-20.50	PASS
355.63	-71.17	9.27	-61.90	-36	-25.90	PASS
846.16	-61.89	9.75	-52.14	-36	-16.14	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1588.05	-56.08	18.05	-38.03	-30	-8.03	PASS
2969.60	-59.31	15.75	-43.56	-30	-13.56	PASS
3388.85	-64.85	13.06	-51.79	-30	-21.79	PASS
11497.13	-53.1	12.52	-40.58	-30	-10.58	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
58.56	-64.02	3.91	-60.11	-36	-24.11	PASS
117.34	-60.69	6.95	-53.74	-36	-17.74	PASS
426.86	-60.44	9.27	-51.17	-36	-15.17	PASS
800.90	-79.77	9.75	-70.02	-36	-34.02	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n20 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1701.92	-66.8	18.05	-48.75	-30	-18.75	PASS
2520.14	-49.88	15.75	-34.13	-30	-4.13	PASS
3837.32	-59.23	13.06	-46.17	-30	-16.17	PASS
9151.20	-69.62	12.52	-57.10	-30	-27.10	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

Note: This report records the worst test results, test results only QPSK Mode worst.

n28 CH L 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
55.08	-57.38	3.91	-53.47	-36	-17.47	PASS
96.96	-51.20	6.95	-44.25	-36	-8.25	PASS
441.09	-59.20	9.27	-49.93	-36	-13.93	PASS
674.31	-49.56	9.75	-39.81	-36	-3.81	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n28 CH L 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1014.05	-53.86	18.05	-35.81	-30	-5.81	PASS
2307.74	-58.48	15.75	-42.73	-30	-12.73	PASS
3876.33	-52.02	13.06	-38.96	-30	-8.96	PASS
11490.36	-49.13	12.52	-36.61	-30	-6.61	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n28 CH L 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
78.94	-54.18	3.91	-50.27	-36	-14.27	PASS
146.11	-56.90	6.95	-49.95	-36	-13.95	PASS
501.51	-49.47	9.27	-40.20	-36	-4.20	PASS
745.61	-57.66	9.75	-47.91	-36	-11.91	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH L 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1193.98	-56.38	18.05	-38.33	-30	-8.33	PASS
2341.77	-52.49	15.75	-36.74	-30	-6.74	PASS
3047.98	-55.23	13.06	-42.17	-30	-12.17	PASS
9664.00	-58.12	12.52	-45.60	-30	-15.60	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH M 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
51.13	-50.53	3.91	-46.62	-36	-10.62	PASS
134.39	-50.58	6.95	-43.63	-36	-7.63	PASS
484.23	-49.43	9.27	-40.16	-36	-4.16	PASS
808.55	-58.05	9.75	-48.30	-36	-12.30	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH M 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1327.83	-52.68	18.05	-34.63	-30	-4.63	PASS
2977.16	-51.54	15.75	-35.79	-30	-5.79	PASS
3023.93	-56.31	13.06	-43.25	-30	-13.25	PASS
10323.41	-55.86	12.52	-43.34	-30	-13.34	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH M 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
82.65	-56.93	3.91	-53.02	-36	-17.02	PASS
125.94	-59.78	6.95	-52.83	-36	-16.83	PASS
371.49	-57.08	9.27	-47.81	-36	-11.81	PASS
886.64	-57.96	9.75	-48.21	-36	-12.21	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH M 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1419.99	-56.80	18.05	-38.75	-30	-8.75	PASS
2916.17	-58.34	15.75	-42.59	-30	-12.59	PASS
3493.88	-49.63	13.06	-36.57	-30	-6.57	PASS
5104.84	-49.63	12.52	-37.11	-30	-7.11	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
49.42	-52.63	3.91	-48.72	-36	-12.72	PASS
141.88	-52.54	6.95	-45.59	-36	-9.59	PASS
505.17	-52.43	9.27	-43.16	-36	-7.16	PASS
708.36	-50.82	9.75	-41.07	-36	-5.07	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1433.89	-52.22	18.05	-34.17	-30	-4.17	PASS
2046.28	-59.11	15.75	-43.36	-30	-13.36	PASS
3930.51	-58.32	13.06	-45.26	-30	-15.26	PASS
11508.66	-51.63	12.52	-39.11	-30	-9.11	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
89.95	-52.50	3.91	-48.59	-36	-12.59	PASS
146.89	-59.12	6.95	-52.17	-36	-16.17	PASS
568.55	-55.87	9.27	-46.60	-36	-10.60	PASS
708.41	-55.45	9.75	-45.70	-36	-9.70	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1068.87	-51.25	18.05	-33.20	-30	-3.20	PASS
2016.41	-52.82	15.75	-37.07	-30	-7.07	PASS
3229.40	-56.41	13.06	-43.35	-30	-13.35	PASS
4275.21	-51.14	12.52	-38.62	-30	-8.62	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
60.33	-76.05	3.91	-72.14	-36	-36.14	PASS
176.03	-64.74	6.95	-57.79	-36	-21.79	PASS
342.93	-63.80	9.27	-54.53	-36	-18.53	PASS
830.98	-74.82	9.75	-65.07	-36	-29.07	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1238.69	-64.85	18.05	-46.80	-30	-16.80	PASS
2139.60	-54.6	15.75	-38.85	-30	-8.85	PASS
3055.74	-56.75	13.06	-43.69	-30	-13.69	PASS
5745.33	-58.73	12.52	-46.21	-30	-16.21	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.92	-59.92	3.91	-56.01	-36	-20.01	PASS
108.62	-76.65	6.95	-69.70	-36	-33.70	PASS
415.44	-62.72	9.27	-53.45	-36	-17.45	PASS
749.97	-71.61	9.75	-61.86	-36	-25.86	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1238.25	-66.56	18.05	-48.51	-30	-18.51	PASS
2668.37	-67.41	15.75	-51.66	-30	-21.66	PASS
3536.95	-53.5	13.06	-40.44	-30	-10.44	PASS
4421.91	-69.43	12.52	-56.91	-30	-26.91	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.32	-70.23	3.91	-66.32	-36	-30.32	PASS
170.42	-70.23	6.95	-63.28	-36	-27.28	PASS
394.03	-67.31	9.27	-58.04	-36	-22.04	PASS
824.29	-69.27	9.75	-59.52	-36	-23.52	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1337.99	-59.34	18.05	-41.29	-30	-11.29	PASS
2115.45	-59.46	15.75	-43.71	-30	-13.71	PASS
3505.42	-56.25	13.06	-43.19	-30	-13.19	PASS
6344.56	-55.72	12.52	-43.20	-30	-13.20	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
32.61	-61.00	3.91	-57.09	-36	-21.09	PASS
172.53	-62.16	6.95	-55.21	-36	-19.21	PASS
370.46	-60.10	9.27	-50.83	-36	-14.83	PASS
664.54	-73.03	9.75	-63.28	-36	-27.28	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1289.87	-54.79	18.05	-36.74	-30	-6.74	PASS
2044.17	-58.6	15.75	-42.85	-30	-12.85	PASS
3057.42	-69.62	13.06	-56.56	-30	-26.56	PASS
11348.36	-56.64	12.52	-44.12	-30	-14.12	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
70.17	-73.12	3.91	-69.21	-36	-33.21	PASS
146.02	-75.18	6.95	-68.23	-36	-32.23	PASS
590.28	-59.97	9.27	-50.70	-36	-14.70	PASS
685.65	-62.68	9.75	-52.93	-36	-16.93	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1483.57	-53.54	18.05	-35.49	-30	-5.49	PASS
2311.38	-66	15.75	-50.25	-30	-20.25	PASS
3516.41	-60.8	13.06	-47.74	-30	-17.74	PASS
5223.26	-50.37	12.52	-37.85	-30	-7.85	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
53.01	-76.31	3.91	-72.40	-36	-36.40	PASS
115.61	-77.55	6.95	-70.60	-36	-34.60	PASS
404.55	-65.56	9.27	-56.29	-36	-20.29	PASS
812.93	-64.78	9.75	-55.03	-36	-19.03	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n28 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1148.31	-60.2	18.05	-42.15	-30	-12.15	PASS
2922.56	-53.92	15.75	-38.17	-30	-8.17	PASS
3194.39	-52.21	13.06	-39.15	-30	-9.15	PASS
7356.10	-63.68	12.52	-51.16	-30	-21.16	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

Note: This report records the worst test results, test results only QPSK Mode worst.

n 38 CH L 5M QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
84.11	-79.21	3.91	-75.30	-36	-39.30	PASS
144.92	-67.13	6.95	-60.18	-36	-24.18	PASS
391.11	-79.31	9.27	-70.04	-36	-34.04	PASS
842.74	-65.78	9.75	-56.03	-36	-20.03	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n38 CH L 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1788.43	-54.85	18.05	-36.80	-30	-6.80	PASS
2185.77	-54.13	15.75	-38.38	-30	-8.38	PASS
3460.84	-62.74	13.06	-49.68	-30	-19.68	PASS
5735.63	-54.88	12.52	-42.36	-30	-12.36	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n 38 CH L 5M QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
30.16	-63.76	3.91	-59.85	-36	-23.85	PASS
116.63	-67.20	6.95	-60.25	-36	-24.25	PASS
266.56	-73.25	9.27	-63.98	-36	-27.98	PASS
682.87	-61.95	9.75	-52.20	-36	-16.20	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH L 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1018.56	-56.63	18.05	-38.58	-30	-8.58	PASS
2722.60	-52.97	15.75	-37.22	-30	-7.22	PASS
3499.20	-62.03	13.06	-48.97	-30	-18.97	PASS
4730.98	-60.1	12.52	-47.58	-30	-17.58	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n 38 CH L 5M QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
88.49	-77.43	3.91	-73.52	-36	-37.52	PASS
147.99	-79.01	6.95	-72.06	-36	-36.06	PASS
409.13	-63.33	9.27	-54.06	-36	-18.06	PASS
600.04	-62.71	9.75	-52.96	-36	-16.96	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n 38 CH M 5M QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1138.42	-68.02	18.05	-49.97	-30	-19.97	PASS
2369.47	-67.84	15.75	-52.09	-30	-22.09	PASS
3184.39	-63.53	13.06	-50.47	-30	-20.47	PASS
10652.98	-52.68	12.52	-40.16	-30	-10.16	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH M 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
67.80	-65.73	3.91	-61.82	-36	-25.82	PASS
186.66	-67.56	6.95	-60.61	-36	-24.61	PASS
214.19	-70.20	9.27	-60.93	-36	-24.93	PASS
817.45	-75.14	9.75	-65.39	-36	-29.39	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH M 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1877.19	-62.38	18.05	-44.33	-30	-14.33	PASS
2921.18	-63.27	15.75	-47.52	-30	-17.52	PASS
3401.07	-67.58	13.06	-54.52	-30	-24.52	PASS
9409.33	-59.58	12.52	-47.06	-30	-17.06	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 5M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
54.77	-61.44	3.91	-57.53	-36	-21.53	PASS
131.46	-60.43	6.95	-53.48	-36	-17.48	PASS
215.58	-60.07	9.27	-50.80	-36	-14.80	PASS
878.38	-61.50	9.75	-51.75	-36	-15.75	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 5M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1381.31	-59.47	18.05	-41.42	-30	-11.42	PASS
2760.79	-51.61	15.75	-35.86	-30	-5.86	PASS
3341.10	-56.71	13.06	-43.65	-30	-13.65	PASS
11335.93	-62.39	12.52	-49.87	-30	-19.87	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 5M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.79	-64.63	3.91	-60.72	-36	-24.72	PASS
95.51	-79.41	6.95	-72.46	-36	-36.46	PASS
240.71	-61.96	9.27	-52.69	-36	-16.69	PASS
811.65	-67.90	9.75	-58.15	-36	-22.15	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 5M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1622.52	-68.53	18.05	-50.48	-30	-20.48	PASS
2614.68	-63.86	15.75	-48.11	-30	-18.11	PASS
3636.62	-63.51	13.06	-50.45	-30	-20.45	PASS
6131.53	-51.79	12.52	-39.27	-30	-9.27	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
46.53	-66.92	3.91	-63.01	-36	-27.01	PASS
189.63	-72.95	6.95	-66.00	-36	-30.00	PASS
209.70	-68.98	9.27	-59.71	-36	-23.71	PASS
815.22	-60.45	9.75	-50.70	-36	-14.70	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1007.76	-60.24	18.05	-42.19	-30	-12.19	PASS
2442.95	-58.92	15.75	-43.17	-30	-13.17	PASS
3015.66	-58.16	13.06	-45.10	-30	-15.10	PASS
6906.56	-58.34	12.52	-45.82	-30	-15.82	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
85.29	-73.81	3.91	-69.90	-36	-33.90	PASS
131.39	-76.06	6.95	-69.11	-36	-33.11	PASS
514.67	-62.08	9.27	-52.81	-36	-16.81	PASS
653.89	-74.42	9.75	-64.67	-36	-28.67	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1287.03	-56.72	18.05	-38.67	-30	-8.67	PASS
2688.83	-65.37	15.75	-49.62	-30	-19.62	PASS
3771.16	-62.26	13.06	-49.20	-30	-19.20	PASS
4385.23	-61.96	12.52	-49.44	-30	-19.44	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
36.09	-79.30	3.91	-75.39	-36	-39.39	PASS
95.35	-68.39	6.95	-61.44	-36	-25.44	PASS
263.35	-65.04	9.27	-55.77	-36	-19.77	PASS
847.81	-60.68	9.75	-50.93	-36	-14.93	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1628.02	-67.27	18.05	-49.22	-30	-19.22	PASS
2883.71	-54.1	15.75	-38.35	-30	-8.35	PASS
3450.42	-53.92	13.06	-40.86	-30	-10.86	PASS
6879.33	-65.43	12.52	-52.91	-30	-22.91	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
72.69	-67.00	3.91	-63.09	-36	-27.09	PASS
128.38	-59.22	6.95	-52.27	-36	-16.27	PASS
336.47	-76.38	9.27	-67.11	-36	-31.11	PASS
667.97	-76.80	9.75	-67.05	-36	-31.05	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1541.81	-51.42	18.05	-33.37	-30	-3.37	PASS
2322.74	-57.88	15.75	-42.13	-30	-12.13	PASS
3107.46	-61.02	13.06	-47.96	-30	-17.96	PASS
11544.78	-64.24	12.52	-51.72	-30	-21.72	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
78.93	-78.54	3.91	-74.63	-36	-38.63	PASS
111.75	-66.52	6.95	-59.57	-36	-23.57	PASS
203.53	-62.90	9.27	-53.63	-36	-17.63	PASS
609.76	-68.21	9.75	-58.46	-36	-22.46	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1942.61	-61.03	18.05	-42.98	-30	-12.98	PASS
2906.03	-51.38	15.75	-35.63	-30	-5.63	PASS
3807.30	-59.96	13.06	-46.90	-30	-16.90	PASS
8502.81	-61.66	12.52	-49.14	-30	-19.14	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
65.61	-66.39	3.91	-62.48	-36	-26.48	PASS
179.03	-67.40	6.95	-60.45	-36	-24.45	PASS
450.70	-72.80	9.27	-63.53	-36	-27.53	PASS
838.65	-77.96	9.75	-68.21	-36	-32.21	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n38 CH H 20M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1142.30	-64.5	18.05	-46.45	-30	-16.45	PASS
2126.88	-68.18	15.75	-52.43	-30	-22.43	PASS
3459.42	-61.65	13.06	-48.59	-30	-18.59	PASS
11523.74	-67.22	12.52	-54.70	-30	-24.70	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level-Limit						

n77 CH L 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
38.13	-73.35	3.91	-69.44	-36	-33.44	PASS
183.30	-73.72	6.95	-66.77	-36	-30.77	PASS
265.89	-70.15	9.27	-60.88	-36	-24.88	PASS
673.93	-70.98	9.75	-61.23	-36	-25.23	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH L 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1332.81	-54.2	18.05	-36.15	-30	-6.15	PASS
2474.59	-51.84	15.75	-36.09	-30	-6.09	PASS
3402.04	-61.32	13.06	-48.26	-30	-18.26	PASS
6031.97	-51.77	12.52	-39.25	-30	-9.25	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH L 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
45.78	-75.68	3.91	-71.77	-36	-35.77	PASS
180.42	-75.02	6.95	-68.07	-36	-32.07	PASS
248.57	-79.66	9.27	-70.39	-36	-34.39	PASS
613.91	-77.74	9.75	-67.99	-36	-31.99	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH L 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1838.76	-69.28	18.05	-51.23	-30	-21.23	PASS
2237.46	-68.02	15.75	-52.27	-30	-22.27	PASS
3688.23	-54.69	13.06	-41.63	-30	-11.63	PASS
5400.80	-69.64	12.52	-57.12	-30	-27.12	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH M 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
90.97	-66.84	3.91	-62.93	-36	-26.93	PASS
196.59	-79.66	6.95	-72.71	-36	-36.71	PASS
350.93	-71.95	9.27	-62.68	-36	-26.68	PASS
852.43	-71.19	9.75	-61.44	-36	-25.44	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH M 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1039.16	-66.03	18.05	-47.98	-30	-17.98	PASS
2961.64	-63.36	15.75	-47.61	-30	-17.61	PASS
3389.97	-63.78	13.06	-50.72	-30	-20.72	PASS
4607.09	-57.42	12.52	-44.90	-30	-14.90	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH M 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1938.16	-62.78	3.91	-58.87	-36	-22.87	PASS
2991.74	-67.24	6.95	-60.29	-36	-24.29	PASS
3531.83	-50.71	9.27	-41.44	-36	-5.44	PASS
7669.31	-50.78	9.75	-41.03	-36	-5.03	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH M 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1938.59	-49.47	18.05	-31.42	-30	-1.42	PASS
2324.43	-58.66	15.75	-42.91	-30	-12.91	PASS
3846.50	-63.46	13.06	-50.40	-30	-20.40	PASS
7309.04	-58.81	12.52	-46.29	-30	-16.29	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
83.48	-64.53	3.91	-60.62	-36	-24.62	PASS
118.42	-66.78	6.95	-59.83	-36	-23.83	PASS
284.56	-75.55	9.27	-66.28	-36	-30.28	PASS
892.48	-71.00	9.75	-61.25	-36	-25.25	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1326.05	-57.33	18.05	-39.28	-30	-9.28	PASS
2199.54	-51.1	15.75	-35.35	-30	-5.35	PASS
3522.52	-64.58	13.06	-51.52	-30	-21.52	PASS
7088.06	-58.53	12.52	-46.01	-30	-16.01	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(dB)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
186.27	-63.87	3.91	-59.96	-36	-23.96	PASS
497.03	-68.45	6.95	-61.50	-36	-25.50	PASS
811.90	-60.54	9.27	-51.27	-36	-15.27	PASS
716.55	-61.13	9.75	-51.38	-36	-15.38	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1014.78	-67.93	18.05	-49.88	-30	-19.88	PASS
2079.59	-49.17	15.75	-33.42	-30	-3.42	PASS
3220.50	-65.29	13.06	-52.23	-30	-22.23	PASS
8086.56	-54.93	12.52	-42.41	-30	-12.41	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
78.79	-70.85	3.91	-66.94	-36	-30.94	PASS
133.99	-62.44	6.95	-55.49	-36	-19.49	PASS
561.65	-74.92	9.27	-65.65	-36	-29.65	PASS
865.89	-62.81	9.75	-53.06	-36	-17.06	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1030.93	-50.41	18.05	-32.36	-30	-2.36	PASS
2511.31	-68.85	15.75	-53.10	-30	-23.10	PASS
3361.75	-55.45	13.06	-42.39	-30	-12.39	PASS
4476.47	-52.48	12.52	-39.96	-30	-9.96	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
58.14	-64.96	3.91	-61.05	-36	-25.05	PASS
161.66	-64.06	6.95	-57.11	-36	-21.11	PASS
503.92	-65.92	9.27	-56.65	-36	-20.65	PASS
666.44	-60.18	9.75	-50.43	-36	-14.43	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1349.44	-65.81	18.05	-47.76	-30	-17.76	PASS
2117.98	-62.11	15.75	-46.36	-30	-16.36	PASS
3521.16	-55.8	13.06	-42.74	-30	-12.74	PASS
9057.49	-53.45	12.52	-40.93	-30	-10.93	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
87.48	-78.31	3.91	-74.40	-36	-38.40	PASS
122.38	-76.04	6.95	-69.09	-36	-33.09	PASS
286.19	-62.96	9.27	-53.69	-36	-17.69	PASS
606.86	-64.74	9.75	-54.99	-36	-18.99	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1097.32	-61.75	18.05	-43.70	-30	-13.70	PASS
2127.84	-68.9	15.75	-53.15	-30	-23.15	PASS
3502.98	-52.96	13.06	-39.90	-30	-9.90	PASS
8054.68	-60.91	12.52	-48.39	-30	-18.39	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
85.53	-75.41	3.91	-71.50	-36	-35.50	PASS
131.29	-77.79	6.95	-70.84	-36	-34.84	PASS
386.42	-77.01	9.27	-67.74	-36	-31.74	PASS
661.08	-76.19	9.75	-66.44	-36	-30.44	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1023.05	-68.88	18.05	-50.83	-30	-20.83	PASS
2068.54	-63.78	15.75	-48.03	-30	-18.03	PASS
3897.79	-59.66	13.06	-46.60	-30	-16.60	PASS
7674.72	-52.69	12.52	-40.17	-30	-10.17	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
83.68	-75.94	3.91	-72.03	-36	-36.03	PASS
194.46	-66.62	6.95	-59.67	-36	-23.67	PASS
390.33	-64.71	9.27	-55.44	-36	-19.44	PASS
819.47	-64.20	9.75	-54.45	-36	-18.45	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1546.45	-67.39	18.05	-49.34	-30	-19.34	PASS
2608.16	-66.96	15.75	-51.21	-30	-21.21	PASS
3385.25	-67.5	13.06	-54.44	-30	-24.44	PASS
6995.42	-68.24	12.52	-55.72	-30	-25.72	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
46.91	-66.98	3.91	-63.07	-36	-27.07	PASS
178.69	-75.12	6.95	-68.17	-36	-32.17	PASS
427.49	-78.85	9.27	-69.58	-36	-33.58	PASS
739.07	-61.45	9.75	-51.70	-36	-15.70	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n77 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1244.37	-49.41	18.05	-31.36	-30	-1.36	PASS
2280.01	-61.26	15.75	-45.51	-30	-15.51	PASS
3295.35	-63.41	13.06	-50.35	-30	-20.35	PASS
11783.02	-69.46	12.52	-56.94	-30	-26.94	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

Note: This report records the worst test results, test results only QPSK Mode worst.

n78 CH L 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1879.27	-53.93	3.91	-50.02	-36	-14.02	PASS
2462.18	-50.29	6.95	-43.34	-36	-7.34	PASS
3403.64	-57.01	9.27	-47.74	-36	-11.74	PASS
4324.10	-67.03	9.75	-57.28	-36	-21.28	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH L 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1007.27	-61.42	18.05	-43.37	-30	-13.37	PASS
2797.61	-54.26	15.75	-38.51	-30	-8.51	PASS
3749.14	-66.85	13.06	-53.79	-30	-23.79	PASS
7817.77	-66.9	12.52	-54.38	-30	-24.38	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH L 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
43.84	-78.69	3.91	-74.78	-36	-38.78	PASS
95.95	-70.64	6.95	-63.69	-36	-27.69	PASS
536.38	-69.40	9.27	-60.13	-36	-24.13	PASS
611.98	-77.66	9.75	-67.91	-36	-31.91	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH L 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1427.48	-65.19	18.05	-47.14	-30	-17.14	PASS
2438.15	-58.57	15.75	-42.82	-30	-12.82	PASS
3668.60	-66.86	13.06	-53.80	-30	-23.80	PASS
8308.59	-63.11	12.52	-50.59	-30	-20.59	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH M 10M CP-OFDM QPSK H 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
74.43	-71.96	3.91	-68.05	-36	-32.05	PASS
178.50	-59.78	6.95	-52.83	-36	-16.83	PASS
263.53	-61.71	9.27	-52.44	-36	-16.44	PASS
738.30	-78.52	9.75	-68.77	-36	-32.77	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH M 10M CP-OFDM QPSK H 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1661.26	-62.56	18.05	-44.51	-30	-14.51	PASS
2521.72	-56.24	15.75	-40.49	-30	-10.49	PASS
3914.66	-52.12	13.06	-39.06	-30	-9.06	PASS
4732.79	-61.15	12.52	-48.63	-30	-18.63	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH M 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
85.99	-76.83	3.91	-72.92	-36	-36.92	PASS
116.92	-69.69	6.95	-62.74	-36	-26.74	PASS
561.16	-70.05	9.27	-60.78	-36	-24.78	PASS
842.39	-69.65	9.75	-59.90	-36	-23.90	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH M 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1065.04	-50.56	18.05	-32.51	-30	-2.51	PASS
2793.67	-67.53	15.75	-51.78	-30	-21.78	PASS
3418.96	-53.78	13.06	-40.72	-30	-10.72	PASS
6925.36	-62.89	12.52	-50.37	-30	-20.37	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK H 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
57.10	-79.14	3.91	-75.23	-36	-39.23	PASS
135.35	-63.05	6.95	-56.10	-36	-20.10	PASS
272.47	-71.15	9.27	-61.88	-36	-25.88	PASS
839.71	-76.82	9.75	-67.07	-36	-31.07	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n78 CH H 10M CP-OFDM QPSK H 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1181.20	-69.78	18.05	-51.73	-30	-21.73	PASS
2656.42	-62.02	15.75	-46.27	-30	-16.27	PASS
3734.06	-50.81	13.06	-37.75	-30	-7.75	PASS
8252.80	-67.4	12.52	-54.88	-30	-24.88	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n78 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
48.01	-65.55	3.91	-61.64	-36	-25.64	PASS
140.12	-63.13	6.95	-56.18	-36	-20.18	PASS
426.55	-65.57	9.27	-56.30	-36	-20.30	PASS
758.18	-72.81	9.75	-63.06	-36	-27.06	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1195.05	-67.93	18.05	-49.88	-30	-19.88	PASS
2810.09	-49.5	15.75	-33.75	-30	-3.75	PASS
3145.08	-56.89	13.06	-43.83	-30	-13.83	PASS
9404.60	-49.99	12.52	-37.47	-30	-7.47	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
55.31	-77.08	3.91	-73.17	-36	-37.17	PASS
185.57	-60.66	6.95	-53.71	-36	-17.71	PASS
417.99	-71.84	9.27	-62.57	-36	-26.57	PASS
624.16	-72.94	9.75	-63.19	-36	-27.19	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1780.48	-65.39	18.05	-47.34	-30	-17.34	PASS
2609.85	-67.52	15.75	-51.77	-30	-21.77	PASS
3160.99	-64.74	13.06	-51.68	-30	-21.68	PASS
8949.83	-58.63	12.52	-46.11	-30	-16.11	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
45.13	-78.58	3.91	-74.67	-36	-38.67	PASS
91.56	-61.94	6.95	-54.99	-36	-18.99	PASS
230.47	-78.61	9.27	-69.34	-36	-33.34	PASS
874.08	-69.97	9.75	-60.22	-36	-24.22	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1784.11	-65.59	18.05	-47.54	-30	-17.54	PASS
2930.84	-65.84	15.75	-50.09	-30	-20.09	PASS
3019.13	-52.91	13.06	-39.85	-30	-9.85	PASS
9827.57	-68.74	12.52	-56.22	-30	-26.22	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
41.55	-73.00	3.91	-69.09	-36	-33.09	PASS
126.98	-67.91	6.95	-60.96	-36	-24.96	PASS
275.29	-65.10	9.27	-55.83	-36	-19.83	PASS
623.15	-61.53	9.75	-51.78	-36	-15.78	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1775.03	-60.21	18.05	-42.16	-30	-12.16	PASS
2000.27	-51.41	15.75	-35.66	-30	-5.66	PASS
3793.00	-67.02	13.06	-53.96	-30	-23.96	PASS
7701.44	-68.35	12.52	-55.83	-30	-25.83	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
71.30	-72.02	3.91	-68.11	-36	-32.11	PASS
195.20	-62.34	6.95	-55.39	-36	-19.39	PASS
503.67	-67.70	9.27	-58.43	-36	-22.43	PASS
758.85	-76.74	9.75	-66.99	-36	-30.99	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1641.88	-69.04	18.05	-50.99	-30	-20.99	PASS
2863.79	-59.44	15.75	-43.69	-30	-13.69	PASS
3172.23	-63.31	13.06	-50.25	-30	-20.25	PASS
4357.61	-57.45	12.52	-44.93	-30	-14.93	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
56.99	-67.43	3.91	-63.52	-36	-27.52	PASS
140.24	-79.08	6.95	-72.13	-36	-36.13	PASS
403.96	-77.99	9.27	-68.72	-36	-32.72	PASS
871.35	-75.57	9.75	-65.82	-36	-29.82	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1037.00	-52.58	18.05	-34.53	-30	-4.53	PASS
2590.59	-67.34	15.75	-51.59	-30	-21.59	PASS
3740.99	-69.49	13.06	-56.43	-30	-26.43	PASS
11356.49	-50.15	12.52	-37.63	-30	-7.63	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 30M-1G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
55.28	-68.28	3.91	-64.37	-36	-28.37	PASS
192.45	-73.20	6.95	-66.25	-36	-30.25	PASS
363.04	-75.48	9.27	-66.21	-36	-30.21	PASS
764.74	-74.58	9.75	-64.83	-36	-28.83	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

n78 CH H 10M CP-OFDM QPSK V 1-12.75G						
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1500.22	-52.96	18.05	-34.91	-30	-4.91	PASS
2874.13	-54.01	15.75	-38.26	-30	-8.26	PASS
3138.49	-63.84	13.06	-50.78	-30	-20.78	PASS
9700.88	-64.92	12.52	-52.40	-30	-22.40	PASS
Remark:						
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit						

Note: This report records the worst test results, test results only QPSK Mode worst.

DC_1A_n78A CH L 10M CP-OFDM QPSK/5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
81.89	-62.98	3.91	-59.07	-36	-23.07	PASS
182.36	-78.32	6.95	-71.37	-36	-35.37	PASS
456.30	-74.06	9.27	-64.79	-36	-28.79	PASS
783.68	-63.34	9.75	-53.59	-36	-17.59	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH L 10M CP-OFDM QPSK/5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1842.24	-54.66	18.05	-36.61	-30	-6.61	PASS
2909.41	-54.35	15.75	-38.60	-30	-8.60	PASS
3414.22	-67.41	13.06	-54.35	-30	-24.35	PASS
5587.28	-57.93	12.52	-45.41	-30	-15.41	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH L 10M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.37	-61.89	3.91	-57.98	-36	-21.98	PASS
188.04	-73.22	6.95	-66.27	-36	-30.27	PASS
380.34	-72.65	9.27	-63.38	-36	-27.38	PASS
894.76	-59.33	9.75	-49.58	-36	-13.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH L 10M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1339.68	-67.40	18.05	-49.35	-30	-19.35	PASS
2548.43	-49.99	15.75	-34.24	-30	-4.24	PASS
3248.63	-59.48	13.06	-46.42	-30	-16.42	PASS
10098.40	-53.83	12.52	-41.31	-30	-11.31	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH M 10M CP-OFDM QPSK/5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
30.29	-78.31	3.91	-74.40	-36	-38.40	PASS
192.77	-69.02	6.95	-62.07	-36	-26.07	PASS
534.29	-67.18	9.27	-57.91	-36	-21.91	PASS
834.60	-79.84	9.75	-70.09	-36	-34.09	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH M 10M CP-OFDM QPSK/5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1132.01	-60.22	18.05	-42.17	-30	-12.17	PASS
2365.41	-58.43	15.75	-42.68	-30	-12.68	PASS
3934.41	-52.94	13.06	-39.88	-30	-9.88	PASS
11796.67	-49.15	12.52	-36.63	-30	-6.63	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH M 10M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
86.51	-60.99	3.91	-57.08	-36	-21.08	PASS
126.78	-77.99	6.95	-71.04	-36	-35.04	PASS
479.69	-69.91	9.27	-60.64	-36	-24.64	PASS
821.01	-73.45	9.75	-63.70	-36	-27.70	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH M 10M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1375.56	-59.13	18.05	-41.08	-30	-11.08	PASS
2169.01	-51.29	15.75	-35.54	-30	-5.54	PASS
3722.65	-49.45	13.06	-36.39	-30	-6.39	PASS
11641.95	-53.86	12.52	-41.34	-30	-11.34	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 10M CP-OFDM QPSK/5M QPSK H 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
52.89	-59.25	3.91	-55.34	-36	-19.34	PASS
141.02	-65.19	6.95	-58.24	-36	-22.24	PASS
397.27	-60.66	9.27	-51.39	-36	-15.39	PASS
758.74	-64.70	9.75	-54.95	-36	-18.95	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 10M CP-OFDM QPSK/5M QPSK H 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1554.27	-62.73	18.05	-44.68	-30	-14.68	PASS
2471.98	-66.81	15.75	-51.06	-30	-21.06	PASS
3889.91	-65.95	13.06	-52.89	-30	-22.89	PASS
8261.25	-63.11	12.52	-50.59	-30	-20.59	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 10M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
48.89	-71.57	3.91	-67.66	-36	-31.66	PASS
113.87	-73.15	6.95	-66.20	-36	-30.20	PASS
472.75	-69.35	9.27	-60.08	-36	-24.08	PASS
717.51	-65.42	9.75	-55.67	-36	-19.67	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 10M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1823.69	-59.36	18.05	-41.31	-30	-11.31	PASS
2782.68	-61.93	15.75	-46.18	-30	-16.18	PASS
3616.69	-67.85	13.06	-54.79	-30	-24.79	PASS
5635.87	-60.21	12.52	-47.69	-30	-17.69	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
39.50	-78.36	3.91	-74.45	-36	-38.45	PASS
196.05	-78.81	6.95	-71.86	-36	-35.86	PASS
281.15	-63.96	9.27	-54.69	-36	-18.69	PASS
813.02	-64.14	9.75	-54.39	-36	-18.39	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1515.29	-61.73	18.05	-43.68	-30	-13.68	PASS
2839.23	-54.87	15.75	-39.12	-30	-9.12	PASS
3720.89	-59.24	13.06	-46.18	-30	-16.18	PASS
5544.36	-52.55	12.52	-40.03	-30	-10.03	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
83.83	-78.60	3.91	-74.69	-36	-38.69	
122.82	-65.49	6.95	-58.54	-36	-22.54	PASS
272.60	-62.71	9.27	-53.44	-36	-17.44	PASS
657.44	-59.29	9.75	-49.54	-36	-13.54	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1546.87	-62.49	18.05	-44.44	-30	-14.44	
2920.43	-68.78	15.75	-53.03	-30	-23.03	PASS
3072.98	-67.34	13.06	-54.28	-30	-24.28	PASS
7015.10	-58.72	12.52	-46.20	-30	-16.20	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
60.18	-70.39	3.91	-66.48	-36	-30.48	PASS
95.11	-76.17	6.95	-69.22	-36	-33.22	PASS
461.41	-77.61	9.27	-68.34	-36	-32.34	PASS
808.25	-66.27	9.75	-56.52	-36	-20.52	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
1179.43	-62.97	18.05	-44.92	-30	-14.92	PASS
2201.36	-55.99	15.75	-40.24	-30	-10.24	PASS
3796.97	-60.36	13.06	-47.30	-30	-17.30	PASS
10412.80	-55.98	12.52	-43.46	-30	-13.46	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
39.75	-63.13	3.91	-59.22	-36	-23.22	PASS
128.79	-62.91	6.95	-55.96	-36	-19.96	PASS
344.49	-59.55	9.27	-50.28	-36	-14.28	PASS
711.69	-78.86	9.75	-69.11	-36	-33.11	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1480.34	-59.78	18.05	-41.73	-30	-11.73	PASS
2067.38	-54.47	15.75	-38.72	-30	-8.72	PASS
3310.41	-54.95	13.06	-41.89	-30	-11.89	PASS
9098.79	-56.31	12.52	-43.79	-30	-13.79	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
35.50	-69.11	3.91	-65.20	-36	-29.20	PASS
197.65	-60.13	6.95	-53.18	-36	-17.18	PASS
329.29	-59.74	9.27	-50.47	-36	-14.47	PASS
786.84	-67.30	9.75	-57.55	-36	-21.55	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1603.67	-57.66	18.05	-39.61	-30	-9.61	PASS
2698.92	-55.35	15.75	-39.60	-30	-9.60	PASS
3092.14	-56.02	13.06	-42.96	-30	-12.96	PASS
11525.06	-51.65	12.52	-39.13	-30	-9.13	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 30M-1G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
34.85	-70.12	3.91	-66.21	-36	-30.21	PASS
191.99	-68.44	6.95	-61.49	-36	-25.49	PASS
375.29	-67.76	9.27	-58.49	-36	-22.49	PASS
673.47	-73.56	9.75	-63.81	-36	-27.81	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 50M CP-OFDM QPSK/5M QPSK V 1-12.75G

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
1883.35	-52.28	18.05	-34.23	-30	-4.23	PASS
2358.67	-64.8	15.75	-49.05	-30	-19.05	PASS
3996.89	-68.01	13.06	-54.95	-30	-24.95	PASS
10364.13	-51.47	12.52	-38.95	-30	-8.95	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

Note: This report records the worst test results, test results only QPSK Mode worst.

D.2. RADIATED SPURIOUS EMISSIONS FOR IDLE MODE

n1 CH L 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
64.99	H	-79.94	8.07	-71.87	-57	-14.87	PASS
178.20	H	-87.58	7.62	-79.96	-57	-22.96	PASS
238.02	H	-78.10	5.62	-72.48	-57	-15.48	PASS
886.16	H	-82.89	8.80	-74.09	-57	-17.09	PASS
74.92	V	-78.04	2.77	-75.27	-57	-18.27	PASS
169.68	V	-78.61	7.04	-71.57	-57	-14.57	PASS
290.56	V	-89.80	5.42	-84.38	-57	-27.38	PASS
626.03	V	-74.73	4.44	-70.29	-57	-13.29	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n1 CH L 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1864.14	V	-76.39	8.92	-67.47	-47	-20.47	PASS
2572.25	V	-67.40	14.79	-52.61	-47	-5.61	PASS
3914.19	V	-67.91	11.97	-55.94	-47	-8.94	PASS
10570.86	V	-65.31	14.58	-50.73	-47	-3.73	PASS
1626.88	H	-72.23	11.13	-61.10	-47	-14.10	PASS
2830.12	H	-68.67	8.20	-60.47	-47	-13.47	PASS
3093.71	H	-64.67	11.93	-52.74	-47	-5.74	PASS
11908.03	H	-71.50	14.12	-57.38	-47	-10.38	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n1 CH M 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
74.65	H	-83.59	8.07	-75.52	-57	-18.52	PASS
102.98	H	-72.60	7.62	-64.98	-57	-7.98	PASS
491.07	H	-84.03	5.62	-78.41	-57	-21.41	PASS
791.12	H	-89.72	8.80	-80.92	-57	-23.92	PASS
42.32	V	-71.25	2.77	-68.48	-57	-11.48	PASS
107.99	V	-83.97	7.04	-76.93	-57	-19.93	PASS
486.87	V	-89.32	5.42	-83.90	-57	-26.90	PASS
795.67	V	-84.58	4.44	-80.14	-57	-23.14	PASS
Remark:							
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit							

n1 CH M 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1738.77	V	-69.74	8.92	-60.82	-47	-13.82	PASS
2590.80	V	-71.99	14.79	-57.20	-47	-10.20	PASS
3498.82	V	-65.32	11.97	-53.35	-47	-6.35	PASS
7677.56	V	-74.79	14.58	-60.21	-47	-13.21	PASS
1476.85	H	-68.70	11.13	-57.57	-47	-10.57	PASS
2838.70	H	-64.46	8.20	-56.26	-47	-9.26	PASS
3850.15	H	-73.59	11.93	-61.66	-47	-14.66	PASS
11698.66	H	-72.42	14.12	-58.30	-47	-11.30	PASS
Remark:							
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit							

n1 CH H 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
41.01	H	-89.46	8.07	-81.39	-57	-24.39	PASS
152.79	H	-77.11	7.62	-69.49	-57	-12.49	PASS
364.84	H	-81.15	5.62	-75.53	-57	-18.53	PASS
772.92	H	-84.42	8.80	-75.62	-57	-18.62	PASS
70.03	V	-82.99	2.77	-80.22	-57	-23.22	PASS
152.60	V	-72.63	7.04	-65.59	-57	-8.59	PASS
274.55	V	-69.60	5.42	-64.18	-57	-7.18	PASS
805.92	V	-87.29	4.44	-82.85	-57	-25.85	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n1 CH H 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1923.52	V	-65.37	8.92	-56.45	-47	-9.45	PASS
2149.94	V	-73.36	14.79	-58.57	-47	-11.57	PASS
3533.50	V	-69.02	11.97	-57.05	-47	-10.05	PASS
5481.90	V	-72.71	14.58	-58.13	-47	-11.13	PASS
1002.81	H	-75.88	11.13	-64.75	-47	-17.75	PASS
2312.59	H	-66.03	8.20	-57.83	-47	-10.83	PASS
3920.75	H	-78.86	11.93	-66.93	-47	-19.93	PASS
11287.73	H	-71.16	14.12	-57.04	-47	-10.04	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n3 CH L 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
77.19	H	-88.26	8.07	-80.19	-57	-23.19	PASS
197.96	H	-84.70	7.62	-77.08	-57	-20.08	PASS
587.69	H	-83.30	5.62	-77.68	-57	-20.68	PASS
895.30	H	-79.53	8.80	-70.73	-57	-13.73	PASS
30.77	V	-77.97	2.77	-75.20	-57	-18.20	PASS
158.22	V	-76.20	7.04	-69.16	-57	-12.16	PASS
497.72	V	-75.80	5.42	-70.38	-57	-13.38	PASS
751.31	V	-72.79	4.44	-68.35	-57	-11.35	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n3 CH L 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1013.64	V	-78.22	8.92	-69.30	-47	-22.30	PASS
2438.63	V	-74.41	14.79	-59.62	-47	-12.62	PASS
3360.18	V	-70.50	11.97	-58.53	-47	-11.53	PASS
4016.01	V	-69.83	14.58	-55.25	-47	-8.25	PASS
1095.91	H	-76.09	11.13	-64.96	-47	-17.96	PASS
2348.78	H	-70.53	8.20	-62.33	-47	-15.33	PASS
3025.72	H	-75.90	11.93	-63.97	-47	-16.97	PASS
6854.51	H	-76.42	14.12	-62.30	-47	-15.30	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n3 CH M 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
68.26	H	-87.28	8.07	-79.21	-57	-22.21	PASS
121.46	H	-72.48	7.62	-64.86	-57	-7.86	PASS
358.77	H	-82.12	5.62	-76.50	-57	-19.50	PASS
701.25	H	-87.05	8.80	-78.25	-57	-21.25	PASS
57.14	V	-74.64	2.77	-71.87	-57	-14.87	PASS
186.01	V	-76.50	7.04	-69.46	-57	-12.46	PASS
332.04	V	-86.78	5.42	-81.36	-57	-24.36	PASS
630.68	V	-70.64	4.44	-66.20	-57	-9.20	PASS
Remark:							
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit							

n3 CH M 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1030.52	V	-72.45	8.92	-63.53	-47	-16.53	PASS
2444.69	V	-68.21	14.79	-53.42	-47	-6.42	PASS
3943.93	V	-79.72	11.97	-67.75	-47	-20.75	PASS
8074.48	V	-67.26	14.58	-52.68	-47	-5.68	PASS
1208.30	H	-68.39	11.13	-57.26	-47	-10.26	PASS
2051.66	H	-77.39	8.20	-69.19	-47	-22.19	PASS
3343.31	H	-74.82	11.93	-62.89	-47	-15.89	PASS
6780.62	H	-71.82	14.12	-57.70	-47	-10.70	PASS
Remark:							
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit							

n3 CH H 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
58.06	H	-83.29	8.07	-75.22	-57	-18.22	PASS
196.40	H	-73.25	7.62	-65.63	-57	-8.63	PASS
507.68	H	-88.74	5.62	-83.12	-57	-26.12	PASS
861.46	H	-73.80	8.80	-65.00	-57	-8.00	PASS
60.74	V	-82.19	2.77	-79.42	-57	-22.42	PASS
147.80	V	-83.16	7.04	-76.12	-57	-19.12	PASS
215.34	V	-75.14	5.42	-69.72	-57	-12.72	PASS
887.98	V	-72.98	4.44	-68.54	-57	-11.54	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n3 CH H 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1033.48	V	-76.00	8.92	-67.08	-47	-20.08	PASS
2349.96	V	-75.58	14.79	-60.79	-47	-13.79	PASS
3941.76	V	-74.05	11.97	-62.08	-47	-15.08	PASS
9432.42	V	-74.65	14.58	-60.07	-47	-13.07	PASS
1878.89	H	-70.77	11.13	-59.64	-47	-12.64	PASS
2004.09	H	-74.58	8.20	-66.38	-47	-19.38	PASS
3299.66	H	-70.39	11.93	-58.46	-47	-11.46	PASS
9864.73	H	-73.41	14.12	-59.29	-47	-12.29	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 8 CH L 20M QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
58.31	H	-71.60	8.07	-63.53	-57	-6.53	PASS
171.19	H	-74.40	7.62	-66.78	-57	-9.78	PASS
523.05	H	-83.61	5.62	-77.99	-57	-20.99	PASS
764.46	H	-82.88	8.80	-74.08	-57	-17.08	PASS
83.72	V	-86.68	2.77	-83.91	-57	-26.91	PASS
184.15	V	-83.62	7.04	-76.58	-57	-19.58	PASS
517.54	V	-82.47	5.42	-77.05	-57	-20.05	PASS
632.60	V	-83.79	4.44	-79.35	-57	-22.35	PASS
Remark:							
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit							

n 8 CH L 20M QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1063.65	V	-74.53	8.92	-65.61	-47	-18.61	PASS
2861.01	V	-69.88	14.79	-55.09	-47	-8.09	PASS
3475.12	V	-69.55	11.97	-57.58	-47	-10.58	PASS
4597.33	V	-70.91	14.58	-56.33	-47	-9.33	PASS
1358.58	H	-69.35	11.13	-58.22	-47	-11.22	PASS
2522.33	H	-70.63	8.20	-62.43	-47	-15.43	PASS
3223.01	H	-67.68	11.93	-55.75	-47	-8.75	PASS
7326.50	H	-64.70	14.12	-50.58	-47	-3.58	PASS
Remark:							
1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit							

n 8 CH M 20M QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
76.37	H	-76.66	8.07	-68.59	-57	-11.59	PASS
92.27	H	-86.64	7.62	-79.02	-57	-22.02	PASS
467.28	H	-79.99	5.62	-74.37	-57	-17.37	PASS
806.22	H	-87.58	8.80	-78.78	-57	-21.78	PASS
55.34	V	-85.36	2.77	-82.59	-57	-25.59	PASS
197.67	V	-83.84	7.04	-76.80	-57	-19.80	PASS
423.39	V	-70.62	5.42	-65.20	-57	-8.20	PASS
759.90	V	-87.99	4.44	-83.55	-57	-26.55	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 8 CH M 20M QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1977.49	V	-68.70	8.92	-59.78	-47	-12.78	PASS
2875.63	V	-77.66	14.79	-62.87	-47	-15.87	PASS
3207.10	V	-68.08	11.97	-56.11	-47	-9.11	PASS
9497.25	V	-70.18	14.58	-55.60	-47	-8.60	PASS
1110.68	H	-75.62	11.13	-64.49	-47	-17.49	PASS
2082.09	H	-67.98	8.20	-59.78	-47	-12.78	PASS
3575.49	H	-77.13	11.93	-65.20	-47	-18.20	PASS
5690.75	H	-69.95	14.12	-55.83	-47	-8.83	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 8 CH H 20M QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
50.20	H	-78.75	8.07	-70.68	-57	-13.68	PASS
154.33	H	-85.03	7.62	-77.41	-57	-20.41	PASS
323.12	H	-76.91	5.62	-71.29	-57	-14.29	PASS
792.79	H	-82.12	8.80	-73.32	-57	-16.32	PASS
38.07	V	-79.36	2.77	-76.59	-57	-19.59	PASS
134.40	V	-69.86	7.04	-62.82	-57	-5.82	PASS
418.84	V	-80.35	5.42	-74.93	-57	-17.93	PASS
816.34	V	-69.37	4.44	-64.93	-57	-7.93	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 8 CH H 20M QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1642.37	V	-73.43	8.92	-64.51	-47	-17.51	PASS
2594.62	V	-67.17	14.79	-52.38	-47	-5.38	PASS
3575.45	V	-72.82	11.97	-60.85	-47	-13.85	PASS
6672.23	V	-72.80	14.58	-58.22	-47	-11.22	PASS
1476.87	H	-71.36	11.13	-60.23	-47	-13.23	PASS
2324.88	H	-65.13	8.20	-56.93	-47	-9.93	PASS
3571.65	H	-73.29	11.93	-61.36	-47	-14.36	PASS
11791.70	H	-65.54	14.12	-51.42	-47	-4.42	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 20 CH L 20M QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
72.81	H	-70.05	8.07	-61.98	-57	-4.98	PASS
196.23	H	-83.13	7.62	-75.51	-57	-18.51	PASS
449.07	H	-69.15	5.62	-63.53	-57	-6.53	PASS
708.59	H	-81.97	8.80	-73.17	-57	-16.17	PASS
49.44	V	-70.00	2.77	-67.23	-57	-10.23	PASS
144.86	V	-71.00	7.04	-63.96	-57	-6.96	PASS
388.65	V	-76.25	5.42	-70.83	-57	-13.83	PASS
860.73	V	-69.47	4.44	-65.03	-57	-8.03	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 20 CH L 20M QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1492.39	V	-74.96	8.92	-66.04	-47	-19.04	PASS
2856.94	V	-79.45	14.79	-64.66	-47	-17.66	PASS
3299.06	V	-66.79	11.97	-54.82	-47	-7.82	PASS
8057.38	V	-66.60	14.58	-52.02	-47	-5.02	PASS
1520.03	H	-72.47	11.13	-61.34	-47	-14.34	PASS
2243.83	H	-70.42	8.20	-62.22	-47	-15.22	PASS
3190.35	H	-72.43	11.93	-60.50	-47	-13.50	PASS
10655.33	H	-76.55	14.12	-62.43	-47	-15.43	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 20 CH M 20M QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
77.92	H	-72.54	8.07	-64.47	-57	-7.47	PASS
165.47	H	-83.96	7.62	-76.34	-57	-19.34	PASS
564.33	H	-79.74	5.62	-74.12	-57	-17.12	PASS
629.12	H	-84.53	8.80	-75.73	-57	-18.73	PASS
34.44	V	-79.88	2.77	-77.11	-57	-20.11	PASS
174.85	V	-88.15	7.04	-81.11	-57	-24.11	PASS
529.83	V	-73.12	5.42	-67.70	-57	-10.70	PASS
811.63	V	-88.90	4.44	-84.46	-57	-27.46	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 20 CH M 20M QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1969.99	V	-70.64	8.92	-61.72	-47	-14.72	PASS
2479.90	V	-79.41	14.79	-64.62	-47	-17.62	PASS
3931.93	V	-70.65	11.97	-58.68	-47	-11.68	PASS
7757.56	V	-77.50	14.58	-62.92	-47	-15.92	PASS
1483.84	H	-68.77	11.13	-57.64	-47	-10.64	PASS
2229.23	H	-73.30	8.20	-65.10	-47	-18.10	PASS
3346.35	H	-67.93	11.93	-56.00	-47	-9.00	PASS
11550.12	H	-66.74	14.12	-52.62	-47	-5.62	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 20 CH H 20M QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
62.16	H	-77.48	8.07	-69.41	-57	-12.41	PASS
119.21	H	-75.43	7.62	-67.81	-57	-10.81	PASS
220.43	H	-74.20	5.62	-68.58	-57	-11.58	PASS
832.62	H	-82.81	8.80	-74.01	-57	-17.01	PASS
63.78	V	-88.08	2.77	-85.31	-57	-28.31	PASS
133.70	V	-76.04	7.04	-69.00	-57	-12.00	PASS
368.23	V	-78.08	5.42	-72.66	-57	-15.66	PASS
746.38	V	-79.66	4.44	-75.22	-57	-18.22	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 20 CH H 20M QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1385.03	V	-65.94	8.92	-57.02	-47	-10.02	PASS
2251.92	V	-68.63	14.79	-53.84	-47	-6.84	PASS
3027.52	V	-75.90	11.97	-63.93	-47	-16.93	PASS
11152.95	V	-78.59	14.58	-64.01	-47	-17.01	PASS
1852.23	H	-66.88	11.13	-55.75	-47	-8.75	PASS
2319.98	H	-77.21	8.20	-69.01	-47	-22.01	PASS
3694.71	H	-73.83	11.93	-61.90	-47	-14.90	PASS
9336.15	H	-76.25	14.12	-62.13	-47	-15.13	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n28 CH L 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
37.06	H	-74.81	8.07	-66.74	-57	-9.74	PASS
115.61	H	-73.04	7.62	-65.42	-57	-8.42	PASS
340.54	H	-77.95	5.62	-72.33	-57	-15.33	PASS
707.31	H	-78.74	8.80	-69.94	-57	-12.94	PASS
49.45	V	-74.39	2.77	-71.62	-57	-14.62	PASS
115.43	V	-71.28	7.04	-64.24	-57	-7.24	PASS
559.07	V	-74.88	5.42	-69.46	-57	-12.46	PASS
674.27	V	-71.65	4.44	-67.21	-57	-10.21	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n28 CH L 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1919.23	V	-68.09	8.92	-59.17	-47	-12.17	PASS
2876.94	V	-67.50	14.79	-52.71	-47	-5.71	PASS
3837.59	V	-68.05	11.97	-56.08	-47	-9.08	PASS
4642.48	V	-69.09	14.58	-54.51	-47	-7.51	PASS
1218.78	H	-67.88	11.13	-56.75	-47	-9.75	PASS
2722.41	H	-68.86	8.20	-60.66	-47	-13.66	PASS
3411.91	H	-67.75	11.93	-55.82	-47	-8.82	PASS
7879.11	H	-67.35	14.12	-53.23	-47	-6.23	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n28 CH M 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
65.95	H	-74.91	8.07	-66.84	-57	-9.84	PASS
181.37	H	-72.35	7.62	-64.73	-57	-7.73	PASS
455.57	H	-76.31	5.62	-70.69	-57	-13.69	PASS
847.89	H	-69.47	8.80	-60.67	-57	-3.67	PASS
42.29	V	-78.45	2.77	-75.68	-57	-18.68	PASS
120.68	V	-73.13	7.04	-66.09	-57	-9.09	PASS
588.49	V	-71.61	5.42	-66.19	-57	-9.19	PASS
689.20	V	-77.77	4.44	-73.33	-57	-16.33	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n28 CH M 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1115.14	V	-65.98	8.92	-57.06	-47	-10.06	PASS
2386.36	V	-64.53	14.79	-49.74	-47	-2.74	PASS
3996.80	V	-67.62	11.97	-55.65	-47	-8.65	PASS
6294.40	V	-68.18	14.58	-53.60	-47	-6.60	PASS
1957.15	H	-68.47	11.13	-57.34	-47	-10.34	PASS
2291.23	H	-65.09	8.20	-56.89	-47	-9.89	PASS
3088.52	H	-69.34	11.93	-57.41	-47	-10.41	PASS
5421.01	H	-67.03	14.12	-52.91	-47	-5.91	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n28 CH H 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
54.27	H	-71.50	8.07	-63.43	-57	-6.43	PASS
169.88	H	-70.14	7.62	-62.52	-57	-5.52	PASS
547.53	H	-69.24	5.62	-63.62	-57	-6.62	PASS
688.05	H	-71.49	8.80	-62.69	-57	-5.69	PASS
80.64	V	-74.17	2.77	-71.40	-57	-14.40	PASS
187.46	V	-77.37	7.04	-70.33	-57	-13.33	PASS
400.61	V	-75.69	5.42	-70.27	-57	-13.27	PASS
803.96	V	-71.10	4.44	-66.66	-57	-9.66	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n28 CH H 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1008.78	V	-65.92	8.92	-57.00	-47	-10.00	PASS
2043.12	V	-64.04	14.79	-49.25	-47	-2.25	PASS
3884.68	V	-65.18	11.97	-53.21	-47	-6.21	PASS
4658.07	V	-64.37	14.58	-49.79	-47	-2.79	PASS
1130.01	H	-66.96	11.13	-55.83	-47	-8.83	PASS
2541.16	H	-66.35	8.20	-58.15	-47	-11.15	PASS
3389.11	H	-67.94	11.93	-56.01	-47	-9.01	PASS
6616.02	H	-69.10	14.12	-54.98	-47	-7.98	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n38 CH L 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
37.98	H	-69.65	8.07	-61.58	-57	-4.58	PASS
110.41	H	-74.28	7.62	-66.66	-57	-9.66	PASS
513.01	H	-77.10	5.62	-71.48	-57	-14.48	PASS
618.88	H	-82.84	8.80	-74.04	-57	-17.04	PASS
82.92	V	-76.53	2.77	-73.76	-57	-16.76	PASS
121.66	V	-80.71	7.04	-73.67	-57	-16.67	PASS
214.83	V	-82.06	5.42	-76.64	-57	-19.64	PASS
768.32	V	-83.29	4.44	-78.85	-57	-21.85	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n38 CH L 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1162.42	V	-72.66	8.92	-63.74	-47	-16.74	PASS
2403.20	V	-64.14	14.79	-49.35	-47	-2.35	PASS
3400.10	V	-76.69	11.97	-64.72	-47	-17.72	PASS
8586.05	V	-71.49	14.58	-56.91	-47	-9.91	PASS
1708.87	H	-77.44	11.13	-66.31	-47	-19.31	PASS
2610.57	H	-66.96	8.20	-58.76	-47	-11.76	PASS
3761.63	H	-65.65	11.93	-53.72	-47	-6.72	PASS
7446.91	H	-65.84	14.12	-51.72	-47	-4.72	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n38 CH M 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
63.16	H	-85.78	8.07	-77.71	-57	-20.71	PASS
147.59	H	-81.14	7.62	-73.52	-57	-16.52	PASS
534.31	H	-87.88	5.62	-82.26	-57	-25.26	PASS
807.10	H	-74.94	8.80	-66.14	-57	-9.14	PASS
63.54	V	-83.10	2.77	-80.33	-57	-23.33	PASS
153.73	V	-78.14	7.04	-71.10	-57	-14.10	PASS
464.99	V	-85.48	5.42	-80.06	-57	-23.06	PASS
658.98	V	-69.16	4.44	-64.72	-57	-7.72	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n38 CH M 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1768.24	V	-76.10	8.92	-67.18	-47	-20.18	PASS
2207.86	V	-72.86	14.79	-58.07	-47	-11.07	PASS
3054.14	V	-68.72	11.97	-56.75	-47	-9.75	PASS
9523.24	V	-77.34	14.58	-62.76	-47	-15.76	PASS
1851.00	H	-77.31	11.13	-66.18	-47	-19.18	PASS
2350.08	H	-72.64	8.20	-64.44	-47	-17.44	PASS
3055.13	H	-69.31	11.93	-57.38	-47	-10.38	PASS
9676.65	H	-76.12	14.12	-62.00	-47	-15.00	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n38 CH H 20M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
71.81	H	-88.74	8.07	-80.67	-57	-23.67	PASS
152.57	H	-74.90	7.62	-67.28	-57	-10.28	PASS
571.36	H	-82.94	5.62	-77.32	-57	-20.32	PASS
675.75	H	-73.62	8.80	-64.82	-57	-7.82	PASS
87.34	V	-88.11	2.77	-85.34	-57	-28.34	PASS
174.02	V	-85.24	7.04	-78.20	-57	-21.20	PASS
532.78	V	-82.42	5.42	-77.00	-57	-20.00	PASS
810.71	V	-85.74	4.44	-81.30	-57	-24.30	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n38 CH H 20M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1985.18	V	-71.33	8.92	-62.41	-47	-15.41	PASS
2755.87	V	-75.25	14.79	-60.46	-47	-13.46	PASS
3745.93	V	-70.04	11.97	-58.07	-47	-11.07	PASS
4564.20	V	-65.09	14.58	-50.51	-47	-3.51	PASS
1038.48	H	-67.58	11.13	-56.45	-47	-9.45	PASS
2240.26	H	-68.39	8.20	-60.19	-47	-13.19	PASS
3661.78	H	-70.96	11.93	-59.03	-47	-12.03	PASS
9345.14	H	-77.08	14.12	-62.96	-47	-15.96	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n77 CH L 10M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
86.82	H	-84.72	8.07	-76.65	-57	-19.65	PASS
119.61	H	-84.86	7.62	-77.24	-57	-20.24	PASS
396.54	H	-73.25	5.62	-67.63	-57	-10.63	PASS
642.03	H	-71.68	8.80	-62.88	-57	-5.88	PASS
44.77	V	-82.10	2.77	-79.33	-57	-22.33	PASS
143.14	V	-88.97	7.04	-81.93	-57	-24.93	PASS
446.28	V	-71.64	5.42	-66.22	-57	-9.22	PASS
819.52	V	-88.86	4.44	-84.42	-57	-27.42	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n77 CH L 10M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1501.33	V	-66.93	8.92	-58.01	-47	-11.01	PASS
2025.17	V	-79.19	14.79	-64.40	-47	-17.40	PASS
3504.53	V	-74.10	11.97	-62.13	-47	-15.13	PASS
7672.88	V	-70.34	14.58	-55.76	-47	-8.76	PASS
1733.82	H	-64.21	11.13	-53.08	-47	-6.08	PASS
2302.14	H	-72.47	8.20	-64.27	-47	-17.27	PASS
3573.56	H	-69.01	11.93	-57.08	-47	-10.08	PASS
9978.50	H	-67.69	14.12	-53.57	-47	-6.57	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n77 CH M 10M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
31.93	H	-80.90	8.07	-72.83	-57	-15.83	PASS
109.97	H	-72.82	7.62	-65.20	-57	-8.20	PASS
597.45	H	-79.05	5.62	-73.43	-57	-16.43	PASS
783.13	H	-74.75	8.80	-65.95	-57	-8.95	PASS
42.59	V	-87.58	2.77	-84.81	-57	-27.81	PASS
126.54	V	-77.36	7.04	-70.32	-57	-13.32	PASS
335.45	V	-77.73	5.42	-72.31	-57	-15.31	PASS
798.08	V	-83.53	4.44	-79.09	-57	-22.09	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n77 CH M 10M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1819.63	V	-71.77	8.92	-62.85	-47	-15.85	PASS
2922.23	V	-77.79	14.79	-63.00	-47	-16.00	PASS
3728.91	V	-72.83	11.97	-60.86	-47	-13.86	PASS
5574.27	V	-71.89	14.58	-57.31	-47	-10.31	PASS
1198.49	H	-78.59	11.13	-67.46	-47	-20.46	PASS
2632.56	H	-79.68	8.20	-71.48	-47	-24.48	PASS
3069.16	H	-71.21	11.93	-59.28	-47	-12.28	PASS
4566.13	H	-71.82	14.12	-57.70	-47	-10.70	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n77 CH H 10M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
63.83	H	-85.85	8.07	-77.78	-57	-20.78	PASS
105.99	H	-83.79	7.62	-76.17	-57	-19.17	PASS
546.47	H	-75.62	5.62	-70.00	-57	-13.00	PASS
861.61	H	-74.64	8.80	-65.84	-57	-8.84	PASS
78.86	V	-73.73	2.77	-70.96	-57	-13.96	PASS
160.53	V	-87.87	7.04	-80.83	-57	-23.83	PASS
483.45	V	-73.38	5.42	-67.96	-57	-10.96	PASS
747.95	V	-70.27	4.44	-65.83	-57	-8.83	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n77 CH H 10M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1103.58	V	-77.56	8.92	-68.64	-47	-21.64	PASS
2349.38	V	-69.76	14.79	-54.97	-47	-7.97	PASS
3047.93	V	-66.33	11.97	-54.36	-47	-7.36	PASS
9638.42	V	-67.77	14.58	-53.19	-47	-6.19	PASS
1554.35	H	-76.22	11.13	-65.09	-47	-18.09	PASS
2302.55	H	-72.87	8.20	-64.67	-47	-17.67	PASS
3064.14	H	-75.58	11.93	-63.65	-47	-16.65	PASS
4956.62	H	-75.12	14.12	-61.00	-47	-14.00	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n78 CH L 10M CP-OFDM QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
82.15	H	-72.83	8.07	-64.76	-57	-7.76	PASS
136.87	H	-78.86	7.62	-71.24	-57	-14.24	PASS
467.24	H	-72.64	5.62	-67.02	-57	-10.02	PASS
781.09	H	-84.14	8.80	-75.34	-57	-18.34	PASS
59.72	V	-72.18	2.77	-69.41	-57	-12.41	PASS
186.86	V	-71.67	7.04	-64.63	-57	-7.63	PASS
337.16	V	-71.89	5.42	-66.47	-57	-9.47	PASS
877.02	V	-76.02	4.44	-71.58	-57	-14.58	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n78 CH L 10M CP-OFDM QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1250.23	V	-68.03	8.92	-59.11	-47	-12.11	PASS
2912.34	V	-64.89	14.79	-50.10	-47	-3.10	PASS
3322.21	V	-65.24	11.97	-53.27	-47	-6.27	PASS
11742.60	V	-68.38	14.58	-53.80	-47	-6.80	PASS
1519.25	H	-77.86	11.13	-66.73	-47	-19.73	PASS
2439.84	H	-71.96	8.20	-63.76	-47	-16.76	PASS
3152.02	H	-68.62	11.93	-56.69	-47	-9.69	PASS
6761.63	H	-65.60	14.12	-51.48	-47	-4.48	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n 78 CH M 10M CP-OFDM QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
35.19	H	-75.25	8.07	-67.18	-57	-10.18	PASS
153.06	H	-71.00	7.62	-63.38	-57	-6.38	PASS
481.19	H	-81.40	5.62	-75.78	-57	-18.78	PASS
738.38	H	-75.58	8.80	-66.78	-57	-9.78	PASS
70.73	V	-78.51	2.77	-75.74	-57	-18.74	PASS
94.83	V	-80.48	7.04	-73.44	-57	-16.44	PASS
289.00	V	-86.34	5.42	-80.92	-57	-23.92	PASS
628.20	V	-72.13	4.44	-67.69	-57	-10.69	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n78 CH M 10M CP-OFDM QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1546.82	V	-75.46	8.92	-66.54	-47	-19.54	PASS
2407.42	V	-76.47	14.79	-61.68	-47	-14.68	PASS
3233.55	V	-70.38	11.97	-58.41	-47	-11.41	PASS
4814.84	V	-74.25	14.58	-59.67	-47	-12.67	PASS
1051.20	H	-68.97	11.13	-57.84	-47	-10.84	PASS
2556.42	H	-67.27	8.20	-59.07	-47	-12.07	PASS
3848.73	H	-78.20	11.93	-66.27	-47	-19.27	PASS
7905.86	H	-68.61	14.12	-54.49	-47	-7.49	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n78 CH H 10M CP-OFDM QPSK 30M-1G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
33.80	H	-87.84	8.07	-79.77	-57	-22.77	PASS
160.78	H	-75.27	7.62	-67.65	-57	-10.65	PASS
321.19	H	-72.35	5.62	-66.73	-57	-9.73	PASS
758.49	H	-71.19	8.80	-62.39	-57	-5.39	PASS
75.13	V	-72.15	2.77	-69.38	-57	-12.38	PASS
115.42	V	-82.87	7.04	-75.83	-57	-18.83	PASS
481.75	V	-74.39	5.42	-68.97	-57	-11.97	PASS
699.66	V	-76.69	4.44	-72.25	-57	-15.25	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

n78 CH H 10M CP-OFDM QPSK 1-12.75G

Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1053.42	V	-79.47	8.92	-70.55	-47	-23.55	PASS
2588.05	V	-77.55	14.79	-62.76	-47	-15.76	PASS
3633.28	V	-72.17	11.97	-60.20	-47	-13.20	PASS
9510.03	V	-67.47	14.58	-52.89	-47	-5.89	PASS
1035.89	H	-68.37	11.13	-57.24	-47	-10.24	PASS
2489.86	H	-75.89	8.20	-67.69	-47	-20.69	PASS
3194.35	H	-64.99	11.93	-53.06	-47	-6.06	PASS
8440.24	H	-77.08	14.12	-62.96	-47	-15.96	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH L 100M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
50.07	H	-76.09	8.07	-68.02	-57	-11.02	PASS
167.19	H	-70.19	7.62	-62.57	-57	-5.57	PASS
424.21	H	-88.46	5.62	-82.84	-57	-25.84	PASS
723.89	H	-79.40	8.80	-70.60	-57	-13.60	PASS
47.39	V	-86.63	2.77	-83.86	-57	-26.86	PASS
99.67	V	-82.58	7.04	-75.54	-57	-18.54	PASS
562.07	V	-88.51	5.42	-83.09	-57	-26.09	PASS
695.18	V	-87.17	4.44	-82.73	-57	-25.73	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH L 100M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1506.67	V	-74.15	8.92	-65.23	-47	-18.23	PASS
2820.56	V	-77.77	14.79	-62.98	-47	-15.98	PASS
3800.47	V	-76.98	11.97	-65.01	-47	-18.01	PASS
10496.47	V	-71.52	14.58	-56.94	-47	-9.94	PASS
1513.04	H	-76.86	11.13	-65.73	-47	-18.73	PASS
2318.46	H	-79.07	8.20	-70.87	-47	-23.87	PASS
3430.94	H	-74.93	11.93	-63.00	-47	-16.00	PASS
4913.46	H	-73.43	14.12	-59.31	-47	-12.31	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH M 100M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
90.97	H	-88.89	8.07	-80.82	-57	-23.82	PASS
198.36	H	-82.91	7.62	-75.29	-57	-18.29	PASS
365.97	H	-79.90	5.62	-74.28	-57	-17.28	PASS
670.10	H	-72.52	8.80	-63.72	-57	-6.72	PASS
43.12	V	-73.95	2.77	-71.18	-57	-14.18	PASS
137.47	V	-77.12	7.04	-70.08	-57	-13.08	PASS
354.56	V	-82.29	5.42	-76.87	-57	-19.87	PASS
727.51	V	-87.18	4.44	-82.74	-57	-25.74	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH M 100M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1415.30	V	-75.81	8.92	-66.89	-47	-19.89	PASS
2115.13	V	-66.54	14.79	-51.75	-47	-4.75	PASS
3730.12	V	-71.04	11.97	-59.07	-47	-12.07	PASS
8025.60	V	-78.64	14.58	-64.06	-47	-17.06	PASS
1835.83	H	-72.02	11.13	-60.89	-47	-13.89	PASS
2430.47	H	-67.46	8.20	-59.26	-47	-12.26	PASS
3953.08	H	-67.35	11.93	-55.42	-47	-8.42	PASS
7784.68	H	-66.20	14.12	-52.08	-47	-5.08	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 10M CP-OFDM QPSK 30M-1G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
60.61	H	-77.54	8.07	-69.47	-57	-12.47	PASS
141.70	H	-71.29	7.62	-63.67	-57	-6.67	PASS
575.09	H	-79.03	5.62	-73.41	-57	-16.41	PASS
786.60	H	-72.54	8.80	-63.74	-57	-6.74	PASS
64.58	V	-87.51	2.77	-84.74	-57	-27.74	PASS
108.64	V	-80.45	7.04	-73.41	-57	-16.41	PASS
309.80	V	-85.33	5.42	-79.91	-57	-22.91	PASS
842.13	V	-73.79	4.44	-69.35	-57	-12.35	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

DC_1A_n78A CH H 10M CP-OFDM QPSK 1-12.75G							
Frequency	Polarity	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	H/V	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1017.52	V	-76.42	8.92	-67.50	-47	-20.50	PASS
2944.62	V	-64.84	14.79	-50.05	-47	-3.05	PASS
3683.82	V	-70.19	11.97	-58.22	-47	-11.22	PASS
8284.42	V	-78.75	14.58	-64.17	-47	-17.17	PASS
1524.94	H	-78.89	11.13	-67.76	-47	-20.76	PASS
2088.27	H	-76.89	8.20	-68.69	-47	-21.69	PASS
3391.04	H	-68.45	11.93	-56.52	-47	-9.52	PASS
6104.00	H	-67.21	14.12	-53.09	-47	-6.09	PASS

Remark:

1. Emission Level= Meter Reading + Factor, Margin= Emission Level- Limit

D.3. CONTROL AND MONITORING FUNCTIONS (UE)

§4.2.4 –Control and monitoring functions (UE)

Definition & Limits

This requirement, together with other control and monitoring technical requirements identified in the table of cross references in the applicable part, verifies that the control and monitoring functions of the UE prevent it from transmitting in the absence of a valid network.

This test is applicable to radio communications equipment and ancillary equipment in the operating band defined in the applicable part of this multi-part harmonised standard.

This test shall be performed on the radio communications equipment and/or a representative configuration of the ancillary equipment.

Limits:

The maximum measured power during the duration of the test shall not exceed -30 dBm.

Test method

- a) At the start of the test, the UE shall be switched off. The UE antenna connector shall be connected to a power measuring equipment, with the following characteristics:
 - the RF bandwidth shall exceed the total operating transmit frequency range of the UE for operation with an applicable part;
 - the response time of the power measuring equipment shall be such that the measured power has reached within 1 dB of its steady state value within 100 µs of a CW signal being applied;
 - it shall record the maximum power measured.

NOTE: The equipment may include a video low pass filter to minimize its response to transients or Gaussian noise peaks.


- b) The UE shall be switched on for a period of approximately fifteen minutes, and then switched off.
- c) The EUT shall remain switched off for a period of at least thirty seconds, and shall then be switched on for a period of approximately one minute.
- d) The maximum power emitted from the UE throughout the duration of the test shall be recorded. The results obtained shall be compared to the limits in clause 4.2.4.2 in order to prove compliance.

Test Data

Test Condition	Monitoring band	Max Measured Power(dBm)	Limit(dBm)	Result
Normal	The whole band range	-51.61	-30	Pass

APPENDIX E——PHOTOGRAPHS OF THE TEST SETUP

Radiated Spurious Emission Test

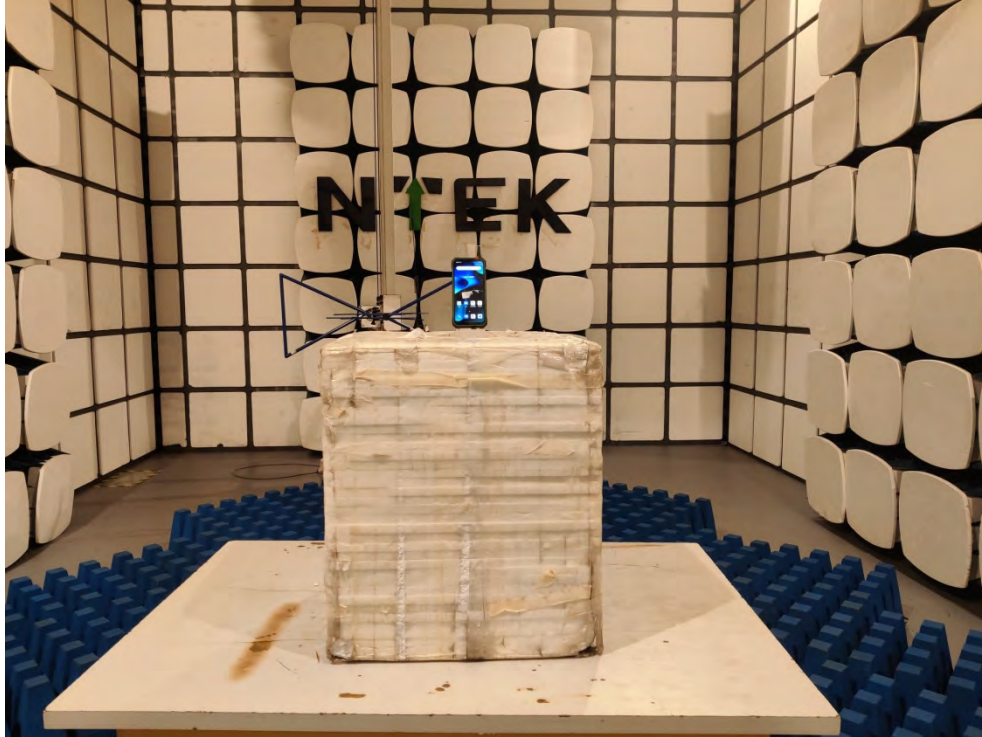

END OF REPORT