



RADIO TEST REPORT

ETSI EN 300 440 V2.2.1 (2018-07)

Product : Tablet PC

Trade Mark : Blackview, OSCAL

Model Name : Tab 8 WiFi

Family Model : Tab 8 Kids, Pad 70

Report No. : STR230303001005E

Prepared for

DOKE COMMUNICATION (HK) LIMITED

RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK CHINA

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : DOKE COMMUNICATION (HK) LIMITED
Address..... : RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD
 WANCHAI HK CHINA
Manufacturer's Name : Shenzhen DOKE Electronic Co.,Ltd
Address..... : 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road,
 Guangming District, Shenzhen, China.

Product description

Product name..... : Tablet PC
Trademark : Blackview, OSCAL
Model and/or type reference : Tab 8 WiFi
Family Model : Tab 8 Kids, Pad 70

Standards : ETSI EN 300 440 V2.2.1 (2018-07)

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the of article 3.2 of the Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number : T230303001R001

Date of Test

Date (s) of performance of tests : Mar 08. 2023 ~ Apr 07. 2023

Date of Issue..... : Apr 10. 2023

Test Result..... : **Pass**

Testing Engineer : 

 (Allen Liu)

Authorized Signatory : 

 (Alex Li)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST CONDITIONS	10
2.3 DESCRIPTION OF TEST CONDITIONS	11
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.)	15
3.1 APPLICABILITY	15
3.2 LIMITS	15
3.3 GENERAL REQUIREMENTS	15
3.4 TEST PROCEDURES	15
3.4.1 FOR NON SPREAD SPECTRUM TRANSMITTERS	15
3.4.2 FOR ALL OTHER TRANSMITTER BANDWIDTHS	16
3.5 TEST SETUP LAYOUT	16
3.6 EUT OPERATION DURING TEST	16
3.7 TEST RESULT FOR -6 DB BANDWIDTH	17
3.8 TEST RESULT FOR E.I.R.P	18
4 . PERMITTED RANGE OF OPERATING FREQUENCIES	19
4.1 APPLIED PROCEDURES / LIMIT	19
4.2 TEST PROCEDURES	19
4.3 TEST SETUP LAYOUT	19
4.4 EUT OPERATION DURING TEST	19
4.5 TEST RESULTS	20
5 . UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	25
5.1 APPLIED PROCEDURES / LIMIT	25
5.2 MEASURING INSTRUMENTS AND SETTING	25
5.3 TEST PROCEDURES	25
5.4 TEST SETUP LAYOUT	26

Table of Contents

Page

5.5 EUT OPERATION DURING TEST	26
5.6 RESULTS OF STANDBY MODE SPURIOUS EMISSIONS	26
5.7 TEST RESULTS	27
6 . DUTY CYCLE	29
6.1 APPLICABILITY AND DESCRIPTION	29
6.2 LIMITS	29
6.4 METHOD OF MEASUREMENT	29
6.5 TEST SETUP	30
6.6 TEST RESULTS	30
7 . SPURIOUS EMISSIONS – RX	31
7.1 APPLIED PROCEDURES / LIMIT	31
7.2 MEASURING INSTRUMENTS AND SETTING	31
7.3 TEST PROCEDURES	31
7.5 TEST SETUP LAYOUT	31
7.6 EUT OPERATION DURING TEST	31
7.7 TEST RESULTS	32
8 . ADJACENT CHANNEL SELECTIVITY	33
8.1 APPLICABILITY	33
8.2 LIMITS	33
8.3 METHODS OF MEASUREMENT	33
8.4 TEST SETUP LAYOUT	34
8.5 TEST RESULTS	34
9 . BLOCKING OR DESENSITIZATION	35
9.1 APPLICABILITY	35
9.2 LIMITS	35
9.3 TEST PROCEDURES	35
8.4 TEST SETUP LAYOUT	36
9.4 TEST RESULTS	37
10 . TEST RESULTS	45
10.1 DUTY CYCLE	45
10.2 -6DB EMISSION BANDWIDTH	56
10.3 FREQUENCY RANGE	67
10.4 OCCUPIED CHANNEL BANDWIDTH	76

Table of Contents**Page**

10.5 RF OUTPUT POWER	87
11 . EUT TEST PHOTO	102
SPURIOUS EMISSIONS MEASUREMENT PHOTOS	102
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
ETSI EN 300 440 V2.2.1 (2018-07)

Clause	Description of Test Item	Remarks	Results
Transmitter Parameters			
4.2.2	-6 dB channel bandwidth	Conducted	Pass
4.2.2	Effective isotropic radiated power	Conducted	Pass
4.2.3	Permitted range of operation frequencies	Conducted	Pass
4.2.4	Unwanted emissions in the spurious domain	Radiated	Pass
4.2.5	Duty cycle	Conducted	Pass
4.2.6	Additional requirements for FHSS equipment	Conducted	N/A
Receiver Parameters			
4.3.3	Adjacent channel selectivity(For Receiver category 1)	Conducted	N/A
4.3.4	Blocking or desensitization(For Receiver category 1,2,3)	Conducted	Pass
4.3.5	Spurious emissions(For Receiver category 1,2,3)	Radiated	Pass

Note: The antenna gain provided by customer is used to calculate the EIRP result. NTEK is not responsible for the accuracy of antenna gain parameter

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.
 Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China
 FCC Registered No.: 463705 IC Registered No.:9270A-1
 CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Radio frequency	$\pm 1 \times 10^{-7}$
2	RF power (conducted)	$\pm 2,5$ dB
3	Radiated emission of transmitter, valid to 26,5 GHz	± 6 dB
4	Radiated emission of transmitter, valid between 26,5 GHz and 66 GHz	± 8 dB
5	Radiated emission of receiver, valid to 26,5 GHz	± 6 dB
6	Radiated emission of receiver, valid between 26,5 GHz and 66 GHz	± 8 dB
7	Temperature	$\pm 1^{\circ}\text{C}$
8	Humidity	± 5 %
9	Voltage (DC)	± 1 %
10	Voltage (AC, < 10 kHz)	± 2 %

NOTE: For radiated emissions above 26,5 GHz it may not be possible to achieve measurement uncertainties complying with the levels specified in this table. In these cases alone it is acceptable to employ the alternative interpretation procedure specified in EN 300440 V2.2.1 clause 5.9.1.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet PC	
Trade Mark	Blackview, OSCAL	
Model Name	Tab 8 WiFi	
Family Model	Tab 8 Kids, Pad 70	
Model Difference	All the model are the same circuit and RF module,except the Trade Mark.	
Product Description	Operation Frequency:	5745-5825 MHz for 802.11a/n20/ac20/ax20; 5755-5795 MHz for 802.11n40/ac40/ax40; 5775MHz for 802.11 ac80/ax80;
	Modulation Type:	802.11a:OFDM (BPSK /QPSK/16QAM/64QAM) 802.11n:OFDM(QPSK/BPSK/16QAM/64QAM) 802.11ac:OFDM(QPSK/BPSK/16QAM/64QAM/256QAM) 802.11ax:OFDM(QPSK/BPSK/16QAM/64QAM/256QAM/1024QAM)
	Antenna Designation:	PIFA Antenna
	Antenna Gain(Peak)	3dBi
Receiver category	<input type="checkbox"/> Category 1: Highly reliable SRD communication media; e.g. serving human life inherent systems (may result in a physical risk to a person). <input type="checkbox"/> Category 2: Medium reliable SRD communication media e.g. causing inconvenience to persons, which cannot simply be overcome by other means. <input checked="" type="checkbox"/> Category 3: Standard reliable SRD communication media e.g. Inconvenience to persons, which can simply be overcome by other means (e.g. manual).	
Channel List	Refer to below	
Adapter	Model: QZ-01000EA00 Input: 100-240V~50/60Hz 0.3A Output: 5.0V---2.0A (10.0W)	
Battery	Battery 1: DC 3.8V, 6580mAh Battery 2: DC 3.8V, 6580mAh	
Rating	DC 3.8V from battery or DC 5V from Adapter.	
Hardware Version	R863T-RK3566-DK-V1.0	
Software Version	Tab_8_WiFi_EEA_S863T_V1.0 Tab_8_Kids_EEA_S863T_V1.0 PAD_70_EEA_S863T_V1.0	

Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.
2. Channel list:

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz)/ax20 Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz)/ax40 band IV (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Frequency and Channel list for 802.11ac(80MHz) /ax80 band IV (5775MHz):

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

2.2 TEST CONDITIONS

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	-10°C ~ 40°C <small>Note1</small>
Relative Humidity	20% - 75%	N/A
Power Rating	DC 3.8V	N/A
Test voltage	DC 3.8V	DC 4.2V-DC 3.4V <small>Note2</small>

Note:

- (1) The temperature range as declared by the manufacturer; or one of the following specified temperature ranges:
 - Temperature category I (General): -20 °C to +55 °C;
 - Temperature category II (Portable): -10 °C to +55 °C;
 - Temperature category III (Equipment for normal indoor use): 5 °C to +35 °C.
- (2) The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer.

2.3 DESCRIPTION OF TEST CONDITIONS

For Conducted Test	
Pretest Mode	Description
Mode 1	802.11a /n/ ac 20 /ax20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 /ax40 CH 151 / CH 159
Mode 3	802.11 ac80/ax80 CH 155

For Radiated Test	
Final Test Mode	Description
Mode 1	802.11a /n/ ac 20 /ax20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 /ax40 CH 151 / CH 159
Mode 3	802.11 ac80/ax80 CH 155

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

E-1
EUT

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Tablet PC	Tab 8 WiFi	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” or “with ferrite core”,”NO” means “unshielded” or”without ferrite core”

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
EMI Test Receiver	R&S	ESPI7	101318	2022.04.06 2023.03.27	2023.04.05 2024.03.26	1 year
Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30 2023.03.27	2023.03.29 2024.03.26	1 year
Turn Table	EM	SC100_1	60531	N/A	N/A	N/A
Antnna Mast	EM	SC100	N/A	N/A	N/A	N/A
Horn Antenna	EM	EM-AH-10180	2011071402	2023.01.12	2024.01.11	1 year
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.04.01 2023.03.27	2023.03.31 2024.03.26	1 year
Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
Test Cable (1-18GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
Pre-Amplifier	EMC	EMC051835SE	980246	2022.06.17	2023.06.16	1 year
Spectrum Analyzer	Agilent	E4407B	MY45108040	2022.04.01 2023.03.27	2023.03.31 2024.03.26	1 year
Filter	TRILTHIC	2400MHZ	29	2020.04.07 2023.03.27	2023.04.06 2024.03.26	3 year
Attenuator	Weinschel	33-10-33	AR4010	2020.04.07 2023.03.27	2023.04.06 2024.03.26	3 year
Attenuator	Weinschel	24-20-34	BP4485	2020.04.07 2023.03.27	2023.04.06 2024.03.26	3 year
MXA Signal Analyzer	Agilent	N9020A	MY49100060	2022.06.17	2023.06.16	1 year
ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2022.04.01 2023.03.21	2023.03.31 2024.03.20	1 year
PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2022.06.17	2023.06.16	1 year
Power Splitter	Mini-Circuits/ USA	ZN2PD-63-S+	SF025101428	2020.04.07 2023.03.27	2023.04.06 2024.03.26	3 year
Coupler	Mini-Circuits	ZADC-10-63-S +	SF794101410	2020.04.07 2023.03.27	2023.04.06 2024.03.26	3 year
Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2020.07.17	2023.07.16	3 year
Attenuator	Agilent	8495B	MY42147029	2020.04.07 2023.03.27	2023.04.06 2024.03.26	3 year
Power Meter	DARE	RPR3006W	15I00041SNO 84	2022.06.17	2023.06.16	1 year
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2022.04.01 2023.03.27	2023.03.31 2024.03.26	1 year
Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2022.04.01 2023.03.27	2023.03.31 2024.03.26	1 year
temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

3. EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.)

3.1 APPLICABILITY

The equivalent isotropically radiated power requirement shall apply to all transmitters.

3.2 LIMITS

Table 2: Maximum radiated peak power (e.i.r.p.)

Frequency Bands	Power	Application	Notes
2 400 MHz to 2 483,5 MHz	10 mW e.i.r.p.	Non-specific short range devices	
2 400 MHz to 2 483,5 MHz	25 mW e.i.r.p.	Radio determination devices	
(a) 2 446 MHz to 2 454 MHz	500 mW e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and annex D
(b) 2 446 MHz to 2 454 MHz	4 W e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and annex D
5 725 MHz to 5 875 MHz	25 mW e.i.r.p.	Non-specific short range devices	
9 200 MHz to 9 500 MHz	25 mW e.i.r.p.	Radio determination devices	
9 500 MHz to 9 975 MHz	25 mW e.i.r.p.	Radio determination devices	
10,5 GHz to 10,6 GHz	500 mW e.i.r.p.	Radio determination devices	
13,4 GHz to 14,0 GHz	25 mW e.i.r.p.	Radio determination devices	
17,1 GHz to 17,3 GHz	400 mW e.i.r.p.	Radio determination devices	See annex F
24,00 GHz to 24,25 GHz	100 mW e.i.r.p.	Non-specific short range devices and Radio determination devices	

3.3 GENERAL REQUIREMENTS

- To measure e.i.r.p. it is first necessary to determine the appropriate method of measurement: see EN 300440 V2.2.1 clauses 4.2.2.3.1 and 4.2.2.3.2. The -6 dB transmitter bandwidth shall be determined using a 100 kHz measuring bandwidth in order to establish which measurement method is applicable:

Condition		Method of measurement
<input type="checkbox"/> Non spread spectrum transmitters with a -6 dB bandwidth of up to 20 MHz and spread spectrum transmitters with channel bandwidth of up to 1 MHz;	<input type="checkbox"/> Non spread spectrum equipment with a -6 dB bandwidth of 20 MHz or less and a duty cycle above 50 %;	Refer to section 3.4.1
	<input type="checkbox"/> Spread spectrum equipment with a -6 dB channel bandwidth of 1 MHz or less.	
<input checked="" type="checkbox"/> for all other transmitter bandwidths.	<input type="checkbox"/> equipment with a -6 dB bandwidth greater than 20 MHz, and equipment with a duty cycle below 50 %;	Refer to section 3.4.2
	<input checked="" type="checkbox"/> spread spectrum equipment with a channel bandwidth above 1 MHz..	

- Measurements shall be performed at normal test conditions.

3.4 TEST PROCEDURES

3.4.1 FOR NON SPREAD SPECTRUM TRANSMITTERS

The measurement shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range. These frequencies shall be recorded.

Equipment measured as constant envelope modulation equipment

For practical reasons, measurements shall be performed only at the highest power level at which the transmitter is intended to operate. The measurement arrangement in figure 2 shall be used. The measurement shall be performed preferably in the absence of modulation. When it is not possible to measure it in the absence of modulation, this fact shall be stated in test reports.

The transmitter shall be set in continuous transmission mode. If this is not possible, the measurements shall be carried out in a period shorter than the duration of the transmitted burst. It may be necessary to extend the duration of the burst.

The transmitter shall be connected to an artificial antenna (see clause 5.8.2) and the power delivered to this artificial antenna shall be measured.

The equivalent isotropically radiated power is then calculated from the measured value, the known antenna gain, relative to an isotropic antenna, and if applicable, any losses due to cables and connectors in the measurement system.

Equipment measured as non-constant envelope modulation equipment

The measurement shall be performed with test signals D-M2 or D-M3 as appropriate.

The transmitter shall be preferably set in continuous transmission mode. If this is not possible, the measurement can be performed in discontinuous mode.

The transmitter shall be connected to an artificial antenna (see clause 5.8.2) and the power delivered to this artificial antenna shall be measured. The measuring instrument shall have a measurement bandwidth not less than sixteen times the channel bandwidth.

The equivalent isotropically radiated power is then calculated from the measured value, the known antenna gain, relative to an isotropic antenna, and if applicable, any losses due to cables and connectors in the measurement system.

3.4.2 FOR ALL OTHER TRANSMITTER BANDWIDTHS

Step 1:


- using a suitable means, the output of the transmitter shall be coupled to a matched diode detector;
- the output of the diode detector shall be connected to the vertical channel of an oscilloscope;
- the combination of the diode detector and the oscilloscope shall be capable of faithfully reproducing the envelope peaks and the duty cycle of the transmitter output signal;
- the observed duty cycle of the transmitter (Tx on/(Tx on + Tx off)) shall be noted as x, (0 < x < 1)

And recorded.

Step 2:

- the average output power of the transmitter shall be determined using a wideband, calibrated RF power meter with a matched thermocouple detector or an equivalent thereof and, where applicable, with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- the e.i.r.p. shall be calculated from the above measured power output A, the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:
 - $P = A + G + 10 \log (1/x)$;
 - P should be EIRP POWER.

3.5 TEST SETUP LAYOUT

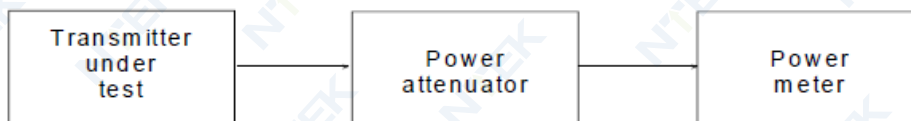

3.6 EUT OPERATION DURING TEST

Where possible, the equipment shall be able to operate in a continuous transmit mode for testing purposes.

3.7 TEST RESULT FOR -6 DB BANDWIDTH

EUT :	Tablet PC	Model Name :	Tab 8 WiFi
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.8V (NORMAL)
Test Mode :	Mode 1/2/3		

Test data reference attachment

3.8 TEST RESULT FOR E.I.R.P

EUT :	Tablet PC	Model Name :	Tab 8 WiFi
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.8V (NORMAL)
Test Mode :	Mode 1/2/3		

Test data reference attachment

4. PERMITTED RANGE OF OPERATING FREQUENCIES

4.1 APPLIED PROCEDURES / LIMIT

The Permitted range of operating frequencies shall apply to all transmitters.

Limits: The width of the power spectrum envelope is $f_H - f_L$ for a given operating frequency. In equipment that allows adjustment or selection of different operating frequencies, the power envelope takes up different positions in the allowed band. The frequency range is determined by the lowest value of f_L and the highest value of f_H resulting from the adjustment of the equipment to the lowest and highest operating frequencies.

The occupied bandwidth (i.e. the bandwidth in which 99 % of the wanted emission is contained) of the transmitter shall fall within the assigned frequency band.

For all equipment the frequency range shall lie within the frequency band given by section 3.2, table 2. For non-harmonized frequency bands the available frequency range may differ between national administrations.


4.2 TEST PROCEDURES

These measurements shall be performed under both normal and extreme operating conditions except for the occupied bandwidth assessment for which measurement at normal operating conditions is sufficient.

The measurement procedure shall be as follows:

- put the spectrum analyser in video averaging mode with a minimum of 50 sweeps selected;
- select the lowest operating frequency of the equipment under test and activate the transmitter with modulation applied. The RF emission of the equipment shall be displayed on the spectrum analyser;
- using the marker of the spectrum analyser, find the lowest frequency below the operating frequency at which the spectral power density drops below the level given in clause 4.2.3. This frequency shall be recorded in the test report;
- select the highest operating frequency of the equipment under test and find the highest frequency at which the spectral power density drops below the value given in clause 4.2.3. This frequency shall be recorded in the test report;
- the difference between the frequencies measured in steps c) and d) is the operating frequency range. It shall be recorded in the test report.

4.3 TEST SETUP LAYOUT

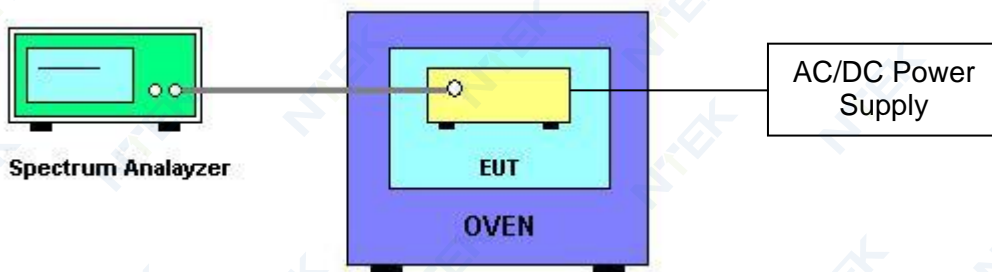

4.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

4.5 TEST RESULTS

EUT :	Tablet PC	Model Name :	Tab 8 WiFi
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.8V (NORMAL)
Test Mode :	TX		

Note: The normal test condition refer to attachment for Occupied Channel Bandwidth 802.11a

Extreme condition				Frequency range (MHz)	
				F _L CH149	F _H CH165
T nom (°C)	20	V nom (V)	3.8	5736.632	5833.089
T min (°C)	-10	V max (V)	4.2	5736.643	5833.097
		V nom (V)	3.8	5736.654	5833.105
		V min (V)	3.4	5736.665	5833.113
T max (°C)	40	V max (V)	4.2	5736.676	5833.121
		V nom (V)	3.8	5736.687	5833.129
		V min (V)	3.4	5736.698	5833.137
Min. f _L / Max. f _H Band Edges				5736.632	5833.137
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11n20

Extreme condition				Frequency range (MHz)	
				F _L CH149	F _H CH165
T nom (°C)	20	V nom (V)	3.8	5736.311	5833.932
T min (°C)	-10	V max (V)	4.2	5736.322	5833.94
		V nom (V)	3.8	5736.333	5833.948
		V min (V)	3.4	5736.344	5833.956
T max (°C)	40	V max (V)	4.2	5736.355	5833.964
		V nom (V)	3.8	5736.366	5833.972
		V min (V)	3.4	5736.377	5833.98
Min. f _L / Max. f _H Band Edges				5736.311	5833.980
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11n40

Extreme condition				Frequency range (MHz)	
				F _L CH151	F _H CH159
T nom (°C)	20	V nom (V)	3.8	5737.046	5813.18
T min (°C)	-10	V max (V)	4.2	5737.057	5813.188
		V nom (V)	3.8	5737.068	5813.196
		V min (V)	3.4	5737.079	5813.204
T max (°C)	40	V max (V)	4.2	5737.09	5813.212
		V nom (V)	3.8	5737.101	5813.22
		V min (V)	3.4	5737.112	5813.228
Min. f _L / Max. f _H Band Edges				5737.046	5813.228
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11ac20

Extreme condition				Frequency range (MHz)	
				F _L CH149	F _H CH165
T nom (°C)	20	V nom (V)	3.8	5736.058	5833.672
T min (°C)	-10	V max (V)	4.2	5736.069	5833.68
		V nom (V)	3.8	5736.08	5833.688
		V min (V)	3.4	5736.091	5833.696
T max (°C)	40	V max (V)	4.2	5736.102	5833.704
		V nom (V)	3.8	5736.113	5833.712
		V min (V)	3.4	5736.124	5833.72
Min. f _L / Max. f _H Band Edges				5736.058	5833.720
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11ac40

Extreme condition				Frequency range (MHz)	
				F _L CH151	F _H CH159
T nom (°C)	20	V nom (V)	3.8	5737.767	5813.942
T min (°C)	-10	V max (V)	4.2	5737.778	5813.95
		V nom (V)	3.8	5737.789	5813.958
		V min (V)	3.4	5737.8	5813.966
T max (°C)	40	V max (V)	4.2	5737.811	5813.974
		V nom (V)	3.8	5737.822	5813.982
		V min (V)	3.4	5737.833	5813.99
Min. f _L / Max. f _H Band Edges				5737.767	5813.990
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11ac80

Extreme condition				Frequency range (MHz)	
				F _L CH155	F _H CH155
T nom (°C)	20	V nom (V)	3.8	5737.48	5812.725
T min (°C)	-10	V max (V)	4.2	5737.491	5812.733
		V nom (V)	3.8	5737.502	5812.741
		V min (V)	3.4	5737.513	5812.749
T max (°C)	40	V max (V)	4.2	5737.524	5812.757
		V nom (V)	3.8	5737.535	5812.765
		V min (V)	3.4	5737.546	5812.773
Min. f _L / Max. f _H Band Edges				5737.480	5812.773
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11ax20

Extreme condition				Frequency range (MHz)	
				F _L CH149	F _H CH165
T nom (°C)	20	V nom (V)	3.8	5736.189	5833.636
T min (°C)	-10	V max (V)	4.2	5736.2	5833.644
		V nom (V)	3.8	5736.211	5833.652
		V min (V)	3.4	5736.222	5833.66
T max (°C)	40	V max (V)	4.2	5736.233	5833.668
		V nom (V)	3.8	5736.244	5833.676
		V min (V)	3.4	5736.255	5833.684
Min. f _L / Max. f _H Band Edges				5736.189	5833.684
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11ax40

Extreme condition				Frequency range (MHz)	
				F _L CH151	F _H CH159
T nom (°C)	20	V nom (V)	3.8	5737.423	5813.174
T min (°C)	-10	V max (V)	4.2	5737.434	5813.182
		V nom (V)	3.8	5737.445	5813.19
		V min (V)	3.4	5737.456	5813.198
T max (°C)	40	V max (V)	4.2	5737.467	5813.206
		V nom (V)	3.8	5737.478	5813.214
		V min (V)	3.4	5737.489	5813.222
Min. f _L / Max. f _H Band Edges				5737.423	5813.222
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

802.11ax80

Extreme condition				Frequency range (MHz)	
				F _L CH155	F _H CH155
T nom (°C)	20	V nom (V)	3.8	5737.369	5812.658
T min (°C)	-10	V max (V)	4.2	5737.38	5812.666
		V nom (V)	3.8	5737.391	5812.674
		V min (V)	3.4	5737.402	5812.682
T max (°C)	40	V max (V)	4.2	5737.413	5812.69
		V nom (V)	3.8	5737.424	5812.698
		V min (V)	3.4	5737.435	5812.706
Min. f _L / Max. f _H Band Edges				5737.369	5812.706
Indoor Use Limits				F _L > 5725.0 MHz	F _L < 5875.0 MHz
Result				Complies	

5. UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

5.1 APPLIED PROCEDURES / LIMIT

The unwanted emissions in the spurious domain requirement shall apply to all transmitters.

State	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
Operating	4 nW /-54dBm	250 nW/-36dBm	1 μW /-30dBm
Standby	2 nW /-57dBm	2 nW /-57dBm	20 nW /-47dBm

5.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of the Spectrum Analyzer.


Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	40GHz
Detector	Positive Peak
Sweep Time	Auto
RB	For frequency 30MHz~1G:100 kHz~120 kHz For frequency above 1G:1MHz

5.3 TEST PROCEDURES

- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. This measurement shall be repeated with the transmitter in standby mode where applicable.
- d. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For above 1G, using Horn antenna .
- e. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- f. Replace the EUT by standard antenna and feed the RF port by signal generator.
- g. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- h. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- i. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- j. If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.
- k. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

5.4 TEST SETUP LAYOUT

Radiated Emission Test Set-Up

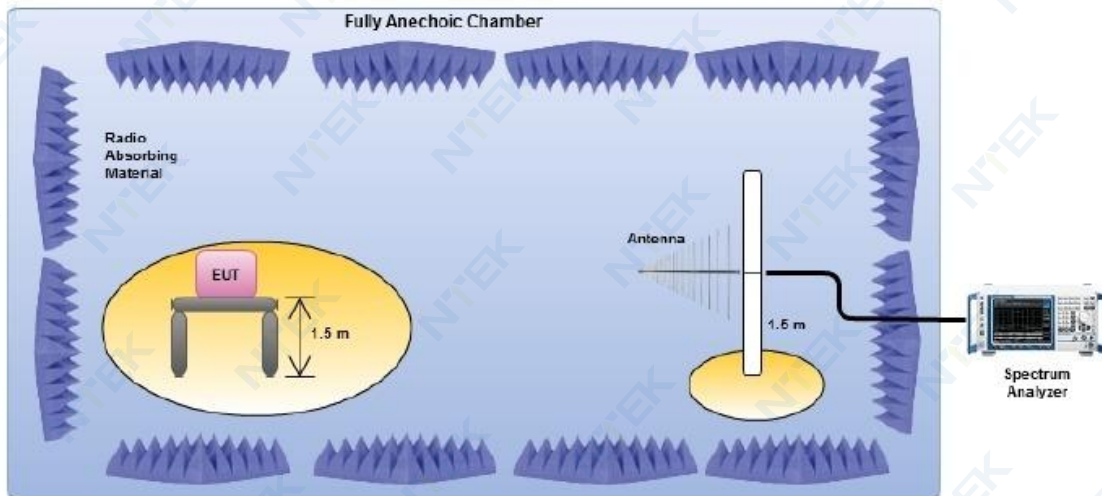

5.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

5.6 RESULTS OF STANDBY MODE SPURIOUS EMISSIONS

For the initial investigation on standby mode and receiving mode, no significant differences in spurious emissions were observed between these 2 modes. So test data for standby mode was omitted in this section.

5.7 TEST RESULTS

EUT :	Tablet PC	Model Name :	Tab 8 WiFi
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 3.8V (NORMAL)
Test Mode :	TX-802.11n20 mode		

Below 1G :

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	44.791	-67.68	14.47	-53.21	-36	-17.21	peak
V	109.46	-79.28	7.22	-72.06	-54	-18.06	peak
V	123.139	-75.92	12.25	-63.67	-36	-27.67	peak
V	183.866	-81.66	13.31	-68.35	-54	-14.35	peak
V	469.726	-72.58	15.91	-56.67	-36	-20.67	peak
V	861.448	-85.65	21.65	-64.00	-54	-10.00	peak
H	40.142	-77.84	18.31	-59.53	-36	-23.53	peak
H	102.241	-77.59	6.20	-71.39	-54	-17.39	peak
H	145.537	-74.5	10.27	-64.23	-36	-28.23	peak
H	207.129	-81.96	12.05	-69.91	-54	-15.91	peak
H	282.286	-71.51	12.93	-58.58	-36	-22.58	peak
H	691.288	-78.39	17.58	-60.81	-54	-6.81	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

Above 1G :

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
operation frequency:5755 MHz							
V	2899.282	-73.51	2.61	-70.90	-30	-40.90	peak
V	5400.336	-68.56	3.32	-65.24	-30	-35.24	peak
V	2388.718	-76.02	8.34	-67.68	-30	-37.68	peak
V	4927.155	-76.62	8.72	-67.90	-30	-37.90	peak
H	2051.477	-77.86	3.12	-74.74	-30	-44.74	peak
H	3244.3	-70.62	8.53	-62.09	-30	-32.09	peak
H	2729.695	-77.61	9.58	-68.03	-30	-38.03	peak
H	4964.848	-70.85	14.73	-56.12	-30	-26.12	peak
operation frequency:5785 MHz							
V	2625.11	-74.7	2.61	-72.09	-30	-42.09	peak
V	5870.792	-77.04	3.32	-73.72	-30	-43.72	peak
V	2583.31	-68.16	8.34	-59.82	-30	-29.82	peak
V	5605.951	-68.39	8.72	-59.67	-30	-29.67	peak
V	2398.185	-71.87	3.12	-68.75	-30	-38.75	peak
H	3794.432	-69.9	8.53	-61.37	-30	-31.37	peak
H	2875.007	-76.23	9.58	-66.65	-30	-36.65	peak
H	3339.07	-76.42	14.73	-61.69	-30	-31.69	peak
H	4601.042	-68.23	14.73	-53.50	-30	-23.50	peak
operation frequency:5825 MHz							
V	2116.436	-71.56	2.61	-68.95	-30	-38.95	peak
V	5970.337	-72.46	3.32	-69.14	-30	-39.14	peak
V	2165.371	-70.07	8.34	-61.73	-30	-31.73	peak
V	5906.275	-72.86	8.72	-64.14	-30	-34.14	peak
V	2661.085	-67.47	3.12	-64.35	-30	-34.35	peak
H	5826.132	-70.52	8.53	-61.99	-30	-31.99	peak
H	2426.288	-72.44	9.58	-62.86	-30	-32.86	peak
H	5769.936	-68.37	14.73	-53.64	-30	-23.64	peak
H	5704.619	-77.66	14.73	-62.93	-30	-32.93	peak
Remark:							
Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit							

Note: Only the worst case 802.11n20 mode recorded in the report.

6. DUTY CYCLE

6.1 APPLICABILITY AND DESCRIPTION

Duty Cycle (DC) shall apply to all transmitting equipment except those which utilize Listen Before Talk (LBT) clause 4.4.2, or Detect And Avoid (DAA), clause 4.4.3. RFID transmitters operating in the 2 446 MHz to 2 454 MHz frequency band that transmit at a maximum radiated peak power level of less than 500 mW e.i.r.p. are also excluded.

Duty cycle is the ratio expressed as a percentage, of the cumulative duration of transmissions T_{on_cum} within an observation interval T_{obs} .

$$DC = \left(\frac{T_{on_cum}}{T_{obs}} \right) F_{obs} \text{ on an observation bandwidth } F_{obs}.$$

Unless otherwise specified, T_{obs} is 1 hour and the observation bandwidth F_{obs} is the operational frequency band

Each transmission consists of an RF emission, or sequence of RF emissions separated by intervals $< T_{Dis}$.

6.2 LIMITS

Table 4 defines the maximum duty cycle within a 1 hour period.

Table 4: Duty cycle limits


Frequency Band	Duty cycle	Application	Notes
2 400 MHz to 2 483,5 MHz	No Restriction	Generic use	
2 400 MHz to 2 483,5 MHz	No Restriction	Detection, movement and alert applications	
(a) 2 446 MHz to 2 454 MHz	No Restriction	RFID	Limits shown in annex D shall apply
(b) 2 446 MHz to 2 454 MHz	≤ 15 %	RFID	Limits shown in annex D shall apply
5 725 MHz to 5 875 MHz	No Restriction	Generic use	
9 200 MHz to 9 500 MHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
9 500 MHz to 9 975 MHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
10,5 GHz to 10,6 GHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
13,4 GHz to 14,0 GHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
17,1 GHz to 17,3 GHz	DAA or equivalent techniques	Radiodetermination: GBSAR detecting and movement and alert applications	Limits shown in annex F shall apply
24,00 GHz to 24,25 GHz	No Restriction	Generic use and for Radiodetermination: radar, detection, movement and alert applications	

For devices with a 100 % duty cycle transmitting an unmodulated carrier most of the time, a time-out shut-off facility shall be implemented in order to improve the efficient use of spectrum. The method of implementation shall be declared by the manufacturer.

6.4 METHOD OF MEASUREMENT

Please refer to EN 300440 V2.2.1 Clause 4.2.5.3.

6.5 TEST SETUP



6.6 TEST RESULTS

EUT:	Tablet PC	Model Name:	Tab 8 WiFi
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	DC 3.8V (NORMAL)
Test Mode:	Mode 1/2/3		

Test data reference attachment

7. SPURIOUS EMISSIONS – RX

7.1 APPLIED PROCEDURES / LIMIT

Clause	Test Item	Frequency(MHz)	Limit
4.3.5.4	Spurious emissions	30-1000	-57dBm
	(radiated)	Above 1000	-47dBm

7.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	40GHz
Detector	Positive Peak
Sweep Time	Auto
RB	For frequency 30MHz~1G:100 kHz~120 kHz For frequency above 1G:1MHz

7.3 TEST PROCEDURES

- a. The EUT was placed on the top of the turntable in open test site area.
- b. The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For above 1G, using Horn antenna .
- d. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- e. Replace the EUT by standard antenna and feed the RF port by signal generator.
- f. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- g. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- h. The level of the spurious emission is the power level of (7) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- i. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

7.5 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 5.4.

7.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously receiving mode.

7.7 TEST RESULTS

EUT :	Tablet PC	Model Name :	Tab 8 WiFi
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Test Power :	DC 3.8V (NORMAL)
Test Mode :	RX-802.11n20 mode		

Below 1G :

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	42.383	-84.04	18.82	-65.22	-57	-8.22	peak
V	118.893	-81.78	11.11	-70.67	-57	-13.67	peak
V	197.488	-80.05	11.41	-68.64	-57	-11.64	peak
V	289.092	-83.59	12.72	-70.87	-57	-13.87	peak
V	625.641	-78.58	12.66	-65.92	-57	-8.92	peak
V	538.36	-77.06	12.62	-64.44	-57	-7.44	peak
H	34.248	-84.49	19.94	-64.55	-57	-7.55	peak
H	106.766	-81.01	10.96	-70.05	-57	-13.05	peak
H	181.378	-77.9	9.42	-68.48	-57	-11.48	peak
H	231.961	-78.21	12.65	-65.56	-57	-8.56	peak
H	682.124	-80.38	11.78	-68.60	-57	-11.60	peak
H	676.872	-82.47	15.38	-67.09	-57	-10.09	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

Above 1G :

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	2931.874	-80.19	11.33	-68.86	-47	-21.86	peak
V	5604.613	-79.8	10.97	-68.83	-47	-21.83	peak
V	2231.996	-84.63	10.14	-74.49	-47	-27.49	peak
V	3684.504	-77.6	16.83	-60.77	-47	-13.77	peak
V	2397.693	-79.48	10.52	-68.96	-47	-21.96	peak
H	3512.956	-84.43	11.70	-72.73	-47	-25.73	peak
H	2205.837	-82	6.62	-75.38	-47	-28.38	peak
H	5003.933	-84	14.99	-69.01	-47	-22.01	peak
H	3942.139	-69.67	8.25	-61.42	-47	-14.42	peak
H	5288.269	-77.75	14.99	-62.76	-47	-15.76	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

8. ADJACENT CHANNEL SELECTIVITY

8.1 APPLICABILITY

This requirement applies to channelized Category 1 receivers..

8.2 LIMITS

The adjacent channel selectivity of the equipment under specified conditions shall not be less than $-30 \text{ dBm} + k$.

The correction factor, k , is as follows:

$$k = -20\log f - 10\log BW$$

Where:

- f is the frequency in GHz;
- BW is the channel bandwidth in MHz.

The factor k is limited within the following:

- $-40 \text{ dB} < k < 0 \text{ dB}$.

8.3 METHODS OF MEASUREMENT

This measurement shall be conducted under normal conditions.

Two signal generators A and B shall be connected to the receiver via a combining network to the receiver, either:

- a) via a test fixture or a test antenna to the receiver integrated, dedicated or test antenna; or
- b) directly to the receiver permanent or temporary antenna connector.

The method of coupling to the receiver shall be stated in the test report.

Signal generator A shall be at the nominal frequency of the receiver, with normal modulation of the wanted signal.

Signal generator B shall be unmodulated and shall be adjusted to the adjacent channel centre frequency immediately above that of the wanted signal.

Initially signal generator B shall be switched off and using signal generator A the level that still gives sufficient

response shall be established. The output level of generator A shall then be increased by 3 dB.

Signal generator B is then switched on and adjusted until the wanted criteria are met. This level shall be recorded.

The measurements shall be repeated with signal generator B unmodulated and adjusted to the adjacent channel centre immediately below the wanted signal.


The adjacent channel selectivity shall be recorded for the upper and lower adjacent channels as the level in dBm of the unwanted signal.

For tagging systems (e.g. RF identification, anti-theft, access control, location and similar systems) signal generator A may be replaced by a physical tag positioned at 70 % of the measured system range in metres.

In this case, the adjacent selectivity shall be recorded as the level in dBm of lowest level of the unwanted signal

(generator B) resulting in a non-read of the tag.

8.4 TEST SETUP LAYOUT

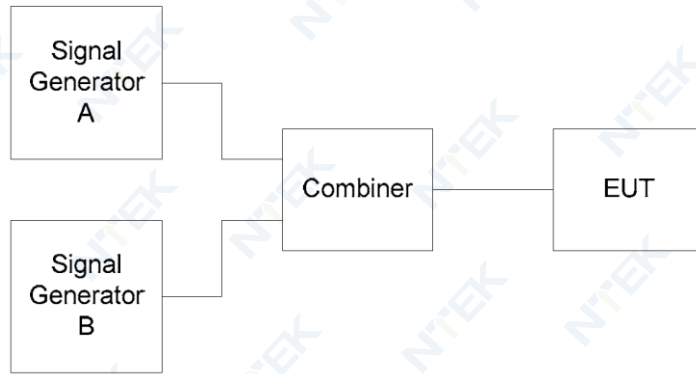

8.5 TEST RESULTS

EUT :	Tablet PC	Model Name :	Tab 8 WiFi
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	N/A
Test Mode :	N/A		

Not applicable.

9. BLOCKING OR DESENSITIZATION

9.1 APPLICABILITY

This requirement applies to all Category 1, 2, and 3 SRD communication media receivers.

9.2 LIMITS

The blocking level, for any frequency within the specified ranges, shall not be less than the values given in table 6, except at frequencies on which spurious responses are found.

Table 6: Limits for blocking or desensitization

Receiver category	Limit
1	-30 dBm + k
2	-45 dBm + k
3	-60 dBm + k

The correction factor, k, is as follows:

$$k = \square -20\log f -10\log BW$$

Where:

- f is the frequency in GHz;
- BW is the channel bandwidth in MHz.

The factor k is limited within the following:

- -40 dB < k < 0 dB.

9.3 TEST PROCEDURES

This measurement shall be conducted under normal conditions.

Two signal generators A and B shall be connected to the receiver via a combining network to the receiver, either:

- a) via a test fixture or a test antenna to the receiver integrated, dedicated or test antenna; or
- b) directly to the receiver permanent or temporary antenna connector.

The method of coupling to the receiver shall be stated in the test report.


Signal generator A shall be at the nominal frequency of the receiver, with normal modulation of the wanted signal. Signal generator B shall be unmodulated and shall be adjusted to a test frequency at approximately 10 times, 20 times and 50 times of the occupied bandwidth above upper band edge of occupied bandwidth. Initially signal generator B shall be switched off and using signal generator A the level which still gives sufficient response shall be established. The output level of generator A shall then be increased by 3 dB. Signal generator B is then switched on and adjusted until the wanted criteria are met. This level shall be recorded.

The measurement shall be repeated with the test frequency for signal generator B at 10 times, 20 times and 50 times of the occupied bandwidth below the lower band edge of the occupied bandwidth

The blocking or desensitization shall be recorded as the level in dBm of lowest level of the unwanted signal(generator B).

For tagging systems (e.g. RF identification, anti-theft, access control, location and similar systems) signal generator A may be replaced by a physical tag positioned at 70 % of the measured system range in metres. In this case, the blocking or desensitization shall be recorded as the ratio in dB of lowest level of the unwanted signal (generator B) resulting in a non-read of the tag. to the declared sensitivity of the receiver +3 dB.

8.4 TEST SETUP LAYOUT

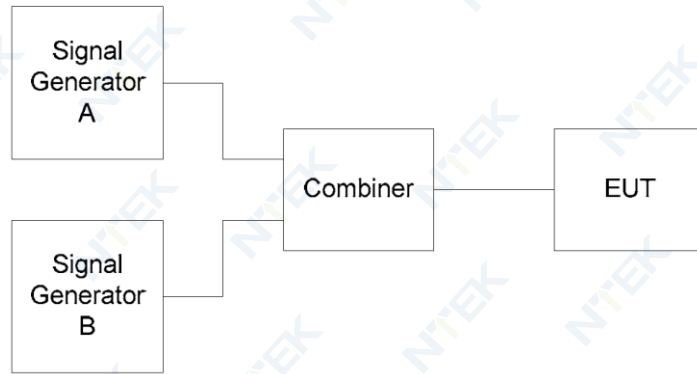

9.4 TEST RESULTS

EUT :	Tablet PC	Model Name :	Tab 8 WiFi
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V (NORMAL)
Test Mode :	RX		

802.11a

5745 MHz

Flow= 5736.63684MHz; Fhigh= 5753.28717MHz, occupied bandwidth=16.65033MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5745 MHz	5745	-65.47	-	-
	10 times lower band edge of the occupied bandwidth	5570.13354	-	-30.21	-87.40(Note1)
	20 times lower band edge of the occupied bandwidth	5403.63024	-	-33.22	-87.40
	50 times lower band edge of the occupied bandwidth	4904.12034	-	-33.24	-87.40
	10 times upper band edge of the occupied bandwidth	5919.79047	-	-32.14	-87.40
	20 times upper band edge of the occupied bandwidth	6086.29377	-	-32.21	-87.40
	50 times upper band edge of the occupied bandwidth	6585.80367	-	-32.34	-87.40

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.40$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11a

5825 MHz

Flow=5816.64884MHz; Fhigh= 5833.29517MHz, occupied bandwidth=16.64633MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5825 MHz	5825	-65.47	-	-
	10 times lower band edge of the occupied bandwidth	5650.18554	-	-30.11	-87.52(Note1)
	20 times lower band edge of the occupied bandwidth	5483.72224	-	-32.16	-87.52
	50 times lower band edge of the occupied bandwidth	4984.33234	-	-33.11	-87.52
	10 times upper band edge of the occupied bandwidth	5999.75847	-	-33.25	-87.52
	20 times upper band edge of the occupied bandwidth	6166.22177	-	-32.16	-87.52
	50 times upper band edge of the occupied bandwidth	6665.61167	-	-31.24	-87.52

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.52$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n20

5745 MHz

Flow= 5736.0449MHz; Fhigh= 5753.88711MHz, occupied bandwidth=17.84221MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5745 MHz	5745	-65.47	-	-
	10 times lower band edge of the occupied bandwidth	5557.6228	-	-33.57	-87.70(Note1)
	20 times lower band edge of the occupied bandwidth	5379.2007	-	-33.26	-87.70
	50 times lower band edge of the occupied bandwidth	4843.9344	-	-33.29	-87.70
	10 times upper band edge of the occupied bandwidth	5932.30921	-	-33.24	-87.70
	20 times upper band edge of the occupied bandwidth	6110.73131	-	-33.57	-87.70
	50 times upper band edge of the occupied bandwidth	6645.99761	-	-32.67	-87.70

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.70$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n20

5825 MHz

Flow= 5816.05289MHz; Fhigh= 5833.89111MHz, occupied bandwidth=17.83822MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5825 MHz	5825	-65.47	-	-
	10 times lower band edge of the occupied bandwidth	5637.67069	-	-33.26	-87.82(Note1)
	20 times lower band edge of the occupied bandwidth	5459.28849	-	-33.75	-87.82
	50 times lower band edge of the occupied bandwidth	4924.14189	-	-33.11	-87.82
	10 times upper band edge of the occupied bandwidth	6012.27331	-	-32.69	-87.82
	20 times upper band edge of the occupied bandwidth	6190.65551	-	-33.67	-87.82
	50 times upper band edge of the occupied bandwidth	6725.80211	-	-33.59	-87.82

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.82$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n40

5755 MHz

Flow= 5736.76982MHz; Fhigh= 5773.13419MHz, occupied bandwidth=36.36437MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5755 MHz	5755	-65.47	-	-
	10 times lower band edge of the occupied bandwidth	5373.12612	-	-31.59	-90.81(Note1)
	20 times lower band edge of the occupied bandwidth	5009.48242	-	-31.78	-90.81
	50 times lower band edge of the occupied bandwidth	3918.55132	-	-31.21	-90.81
	10 times upper band edge of the occupied bandwidth	6136.77789	-	-31.23	-90.81
	20 times upper band edge of the occupied bandwidth	6500.42159	-	-33.21	-90.81
	50 times upper band edge of the occupied bandwidth	7591.35269	-	-33.56	-90.81

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -30.81$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n40

5795 MHz

Flow= 5776.79382MHz; Fhigh= 5813.15818MHz, occupied bandwidth=36.36436MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5795 MHz	5795	-65.47	-	-
	10 times lower band edge of the occupied bandwidth	5413.15022	-	-31.57	-90.87(Note1)
	20 times lower band edge of the occupied bandwidth	5049.50662	-	-32.36	-90.87
	50 times lower band edge of the occupied bandwidth	3958.57582	-	-32.61	-90.87
	10 times upper band edge of the occupied bandwidth	6176.80178	-	-34.57	-90.87
	20 times upper band edge of the occupied bandwidth	6540.44538	-	-33.26	-90.87
	50 times upper band edge of the occupied bandwidth	7631.37618	-	-33.26	-90.87

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -30.87$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11ac80

5775 MHz

Flow= 5737.0678MHz; Fhigh= 5812.7402MHz, occupied bandwidth=75.6724MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5775 MHz	5775	-65.47	-	-
	10 times lower band edge of the occupied bandwidth	4980.344	-	-31.26	-94.02(Note1)
	20 times lower band edge of the occupied bandwidth	4223.620	-	-31.68	-94.02
	50 times lower band edge of the occupied bandwidth	1953.448	-	-32.36	-94.02
	10 times upper band edge of the occupied bandwidth	6569.464	-	-32.64	-94.02
	20 times upper band edge of the occupied bandwidth	7326.188	-	-33.26	-94.02
	50 times upper band edge of the occupied bandwidth	9596.360	-	-32.57	-94.02

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -34.02$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11ax80

5775 MHz

Flow= 5736.1559MHz; Fhigh= 5813.6681MHz, occupied bandwidth=77.5122MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB) (Generator A)	Measurement Vause(dB) (Generator B)	≥ Limit(dB)
3	5775 MHz	5775	-65.30	-	-
	10 times lower band edge of the occupied bandwidth	4961.034	-	-31.16	-94.12(Note1)
	20 times lower band edge of the occupied bandwidth	4185.912	-	-32.57	-94.12
	50 times lower band edge of the occupied bandwidth	1860.546	-	-33.59	-94.12
	10 times upper band edge of the occupied bandwidth	6588.790	-	-30.11	-94.12
	20 times upper band edge of the occupied bandwidth	7363.912	-	-32.55	-94.12
	50 times upper band edge of the occupied bandwidth	9689.278	-	-31.57	-94.12

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -34.12$$

Where:



- f is the frequency in GHz;



- BW is the occupied bandwidth in MHz.



10. TEST RESULTS



10.1 DUTY CYCLE



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	86.26	0.64	0.2
NVNT	a	5785	Ant1	91.55	0.38	0.2
NVNT	a	5825	Ant1	93.56	0.29	0.2
NVNT	n20	5745	Ant1	92.68	0.33	0.21
NVNT	n20	5785	Ant1	90.93	0.41	0.21
NVNT	n20	5825	Ant1	93.15	0.31	0.21
NVNT	n40	5755	Ant1	92.85	0.32	0.22
NVNT	n40	5795	Ant1	77.64	1.1	0.22
NVNT	ac20	5745	Ant1	92.97	0.32	0.21
NVNT	ac20	5785	Ant1	92.7	0.33	0.21
NVNT	ac20	5825	Ant1	90.74	0.42	0.21
NVNT	ac40	5755	Ant1	86.41	0.63	0.22
NVNT	ac40	5795	Ant1	79.87	0.98	0.65
NVNT	ac80	5775	Ant1	81.05	0.91	0.36
NVNT	ax20	5745	Ant1	80.51	0.94	0.41
NVNT	ax20	5785	Ant1	83.18	0.8	0.28
NVNT	ax20	5825	Ant1	78.96	1.03	0.41
NVNT	ax40	5755	Ant1	85.29	0.69	0.21
NVNT	ax40	5795	Ant1	87.95	0.56	0.21
NVNT	ax80	5775	Ant1	76.99	1.14	0.43

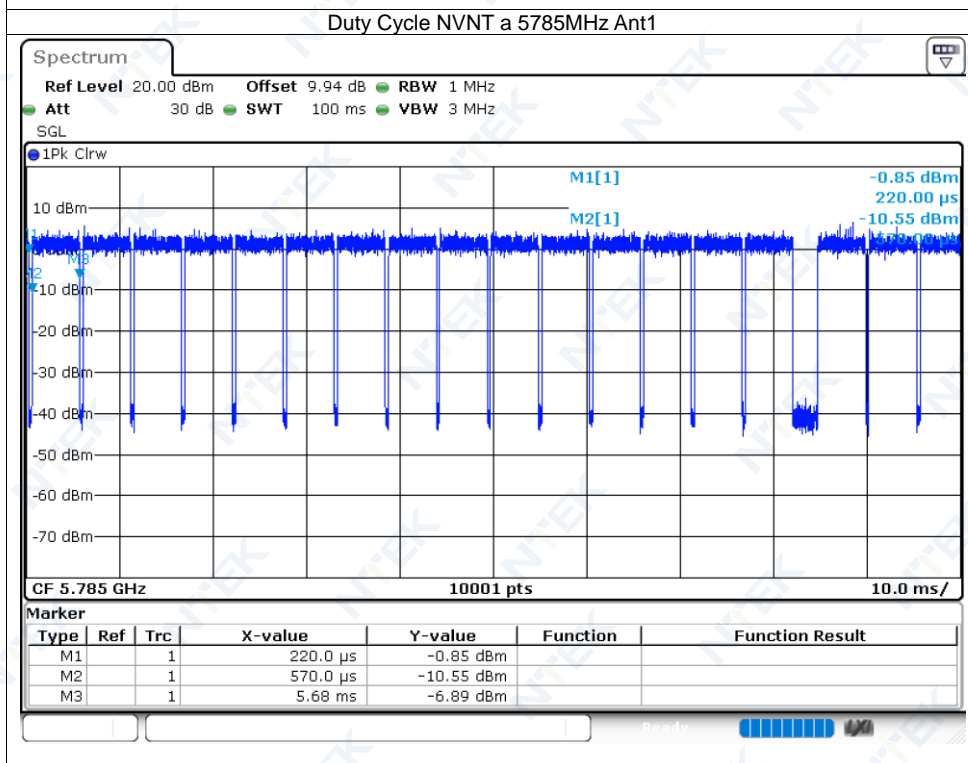
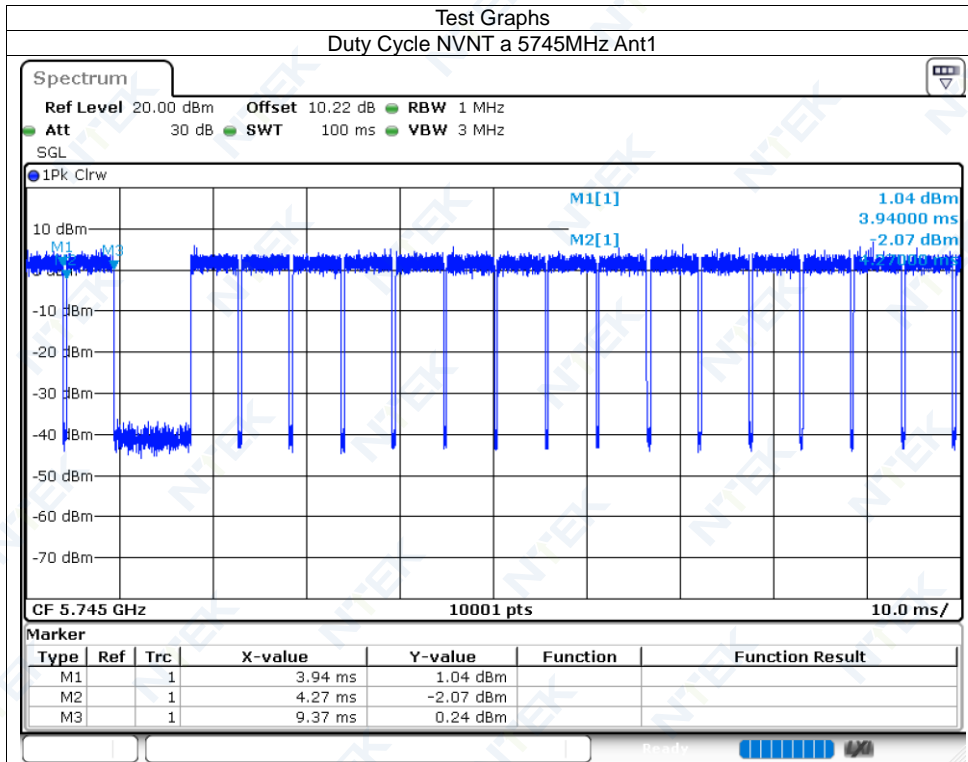


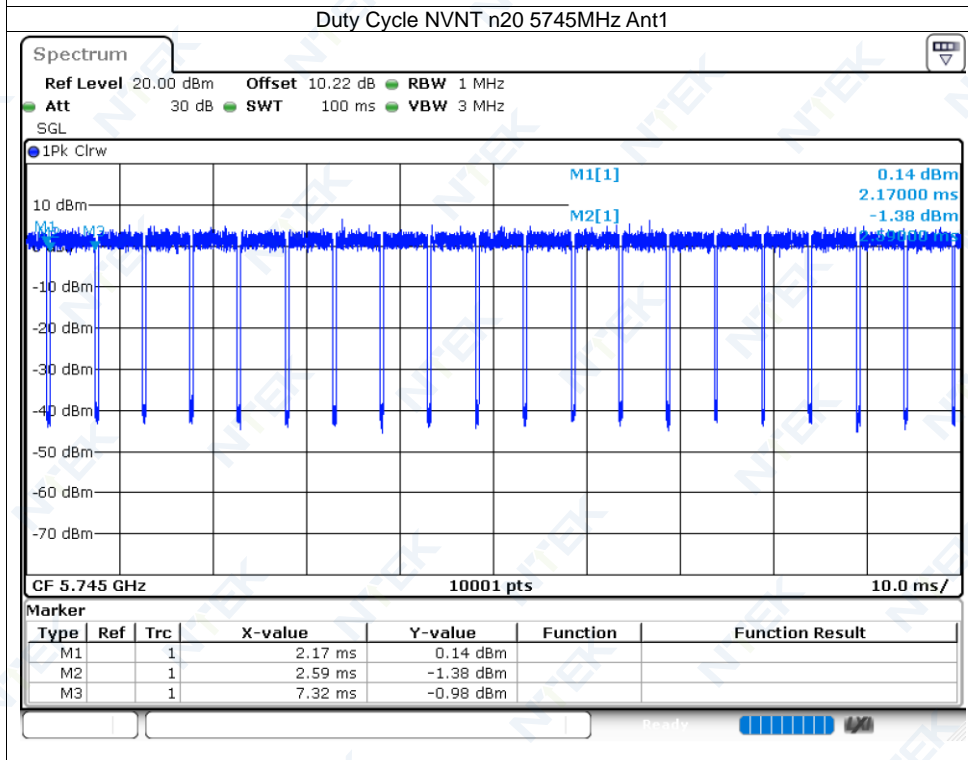
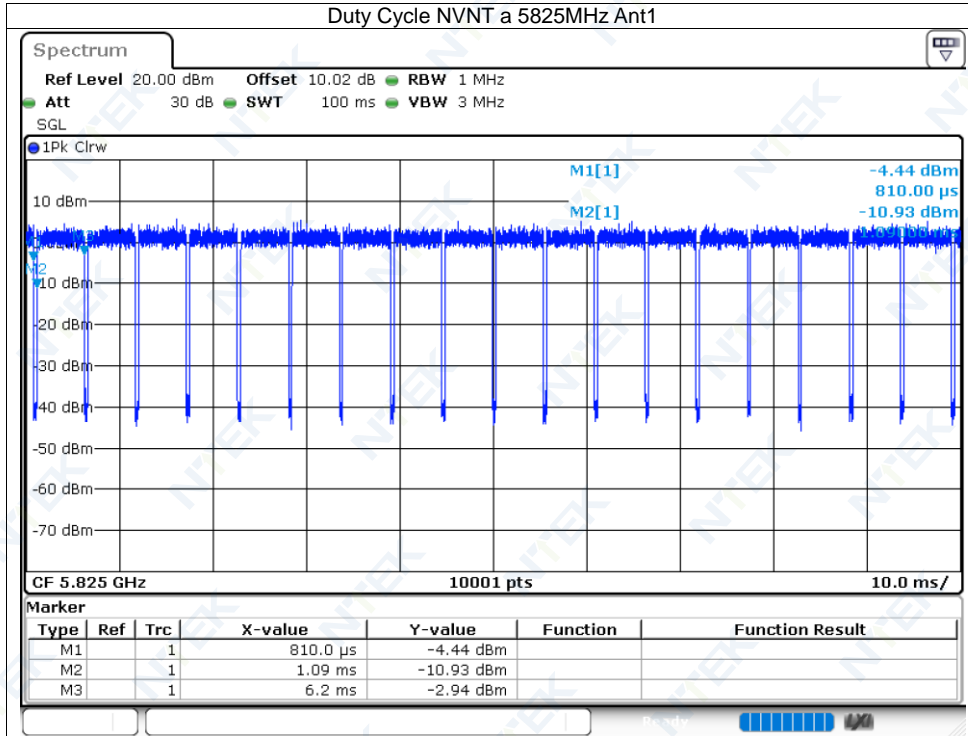


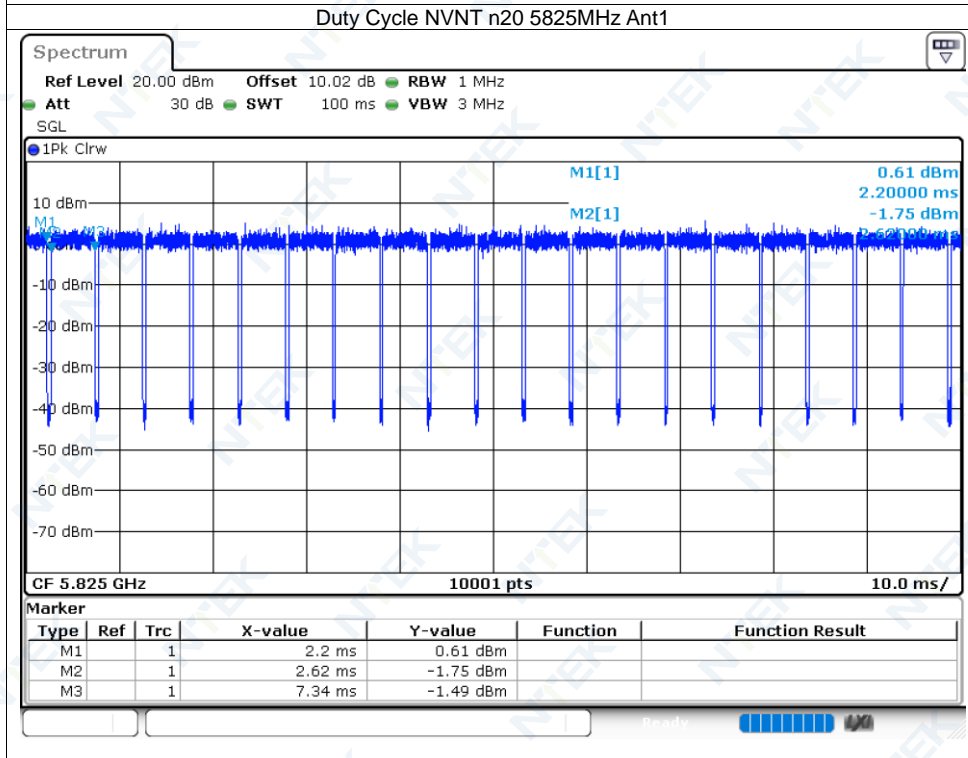
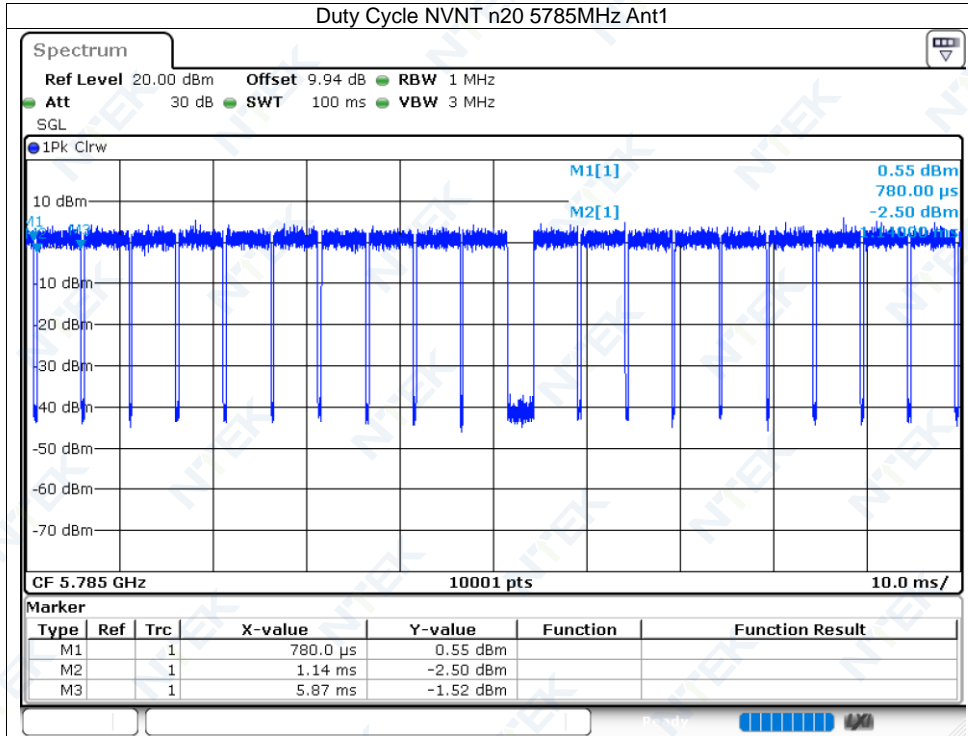


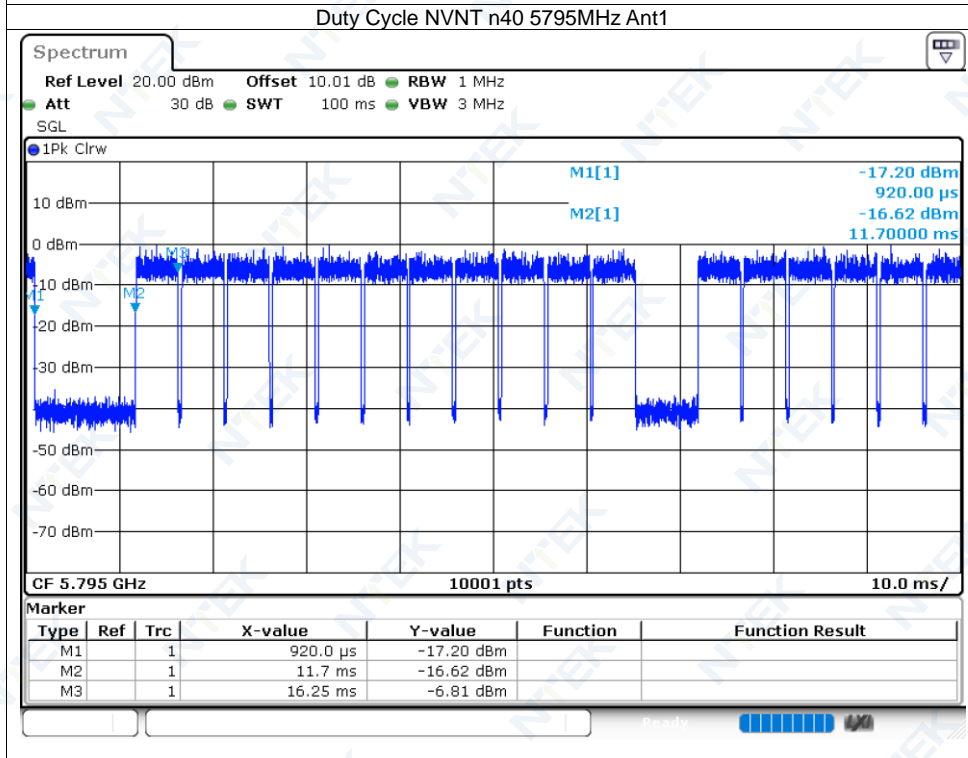
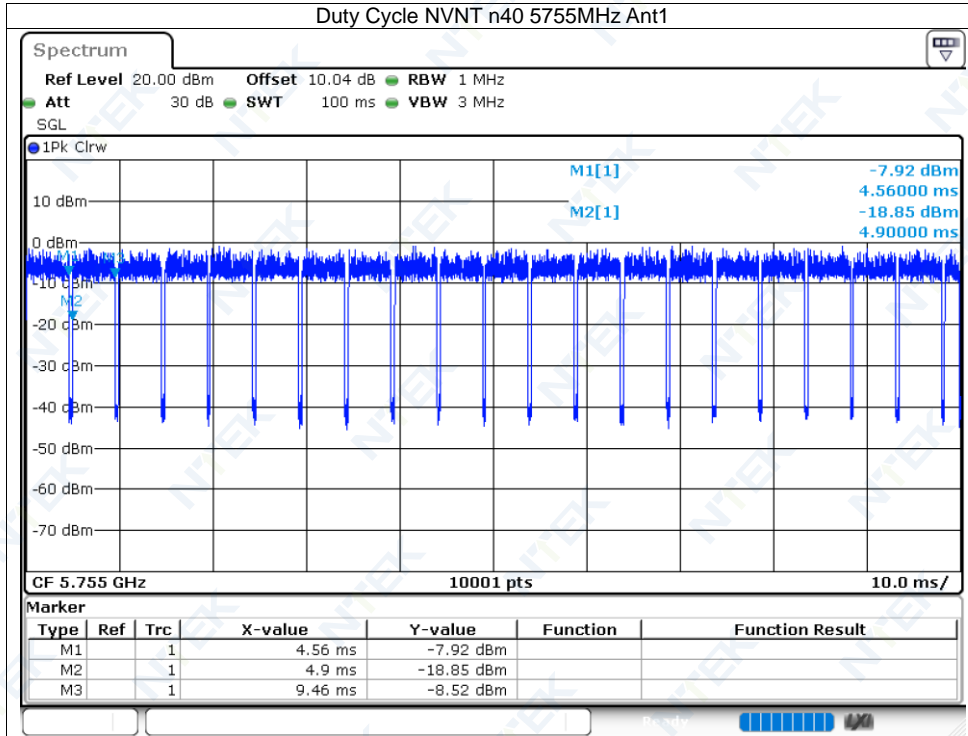


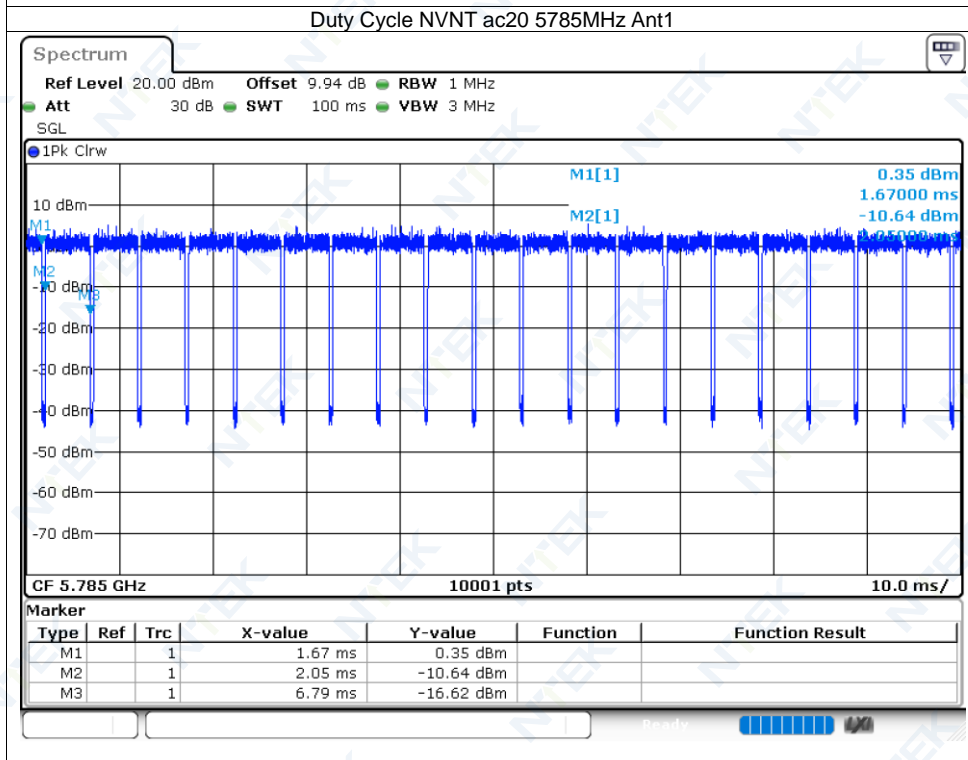
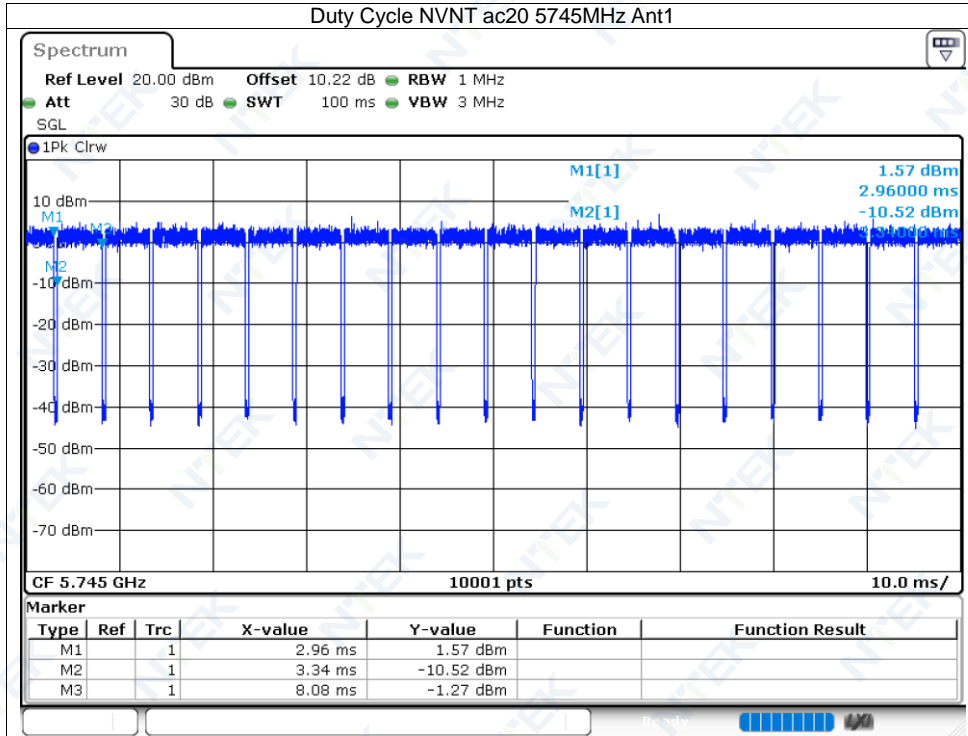


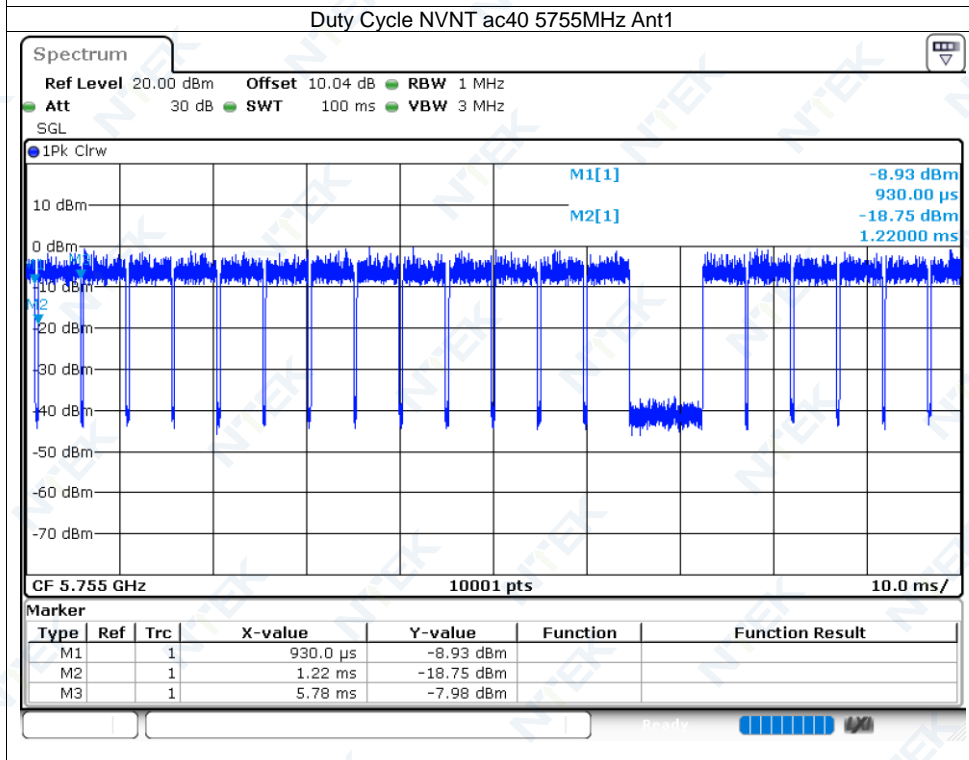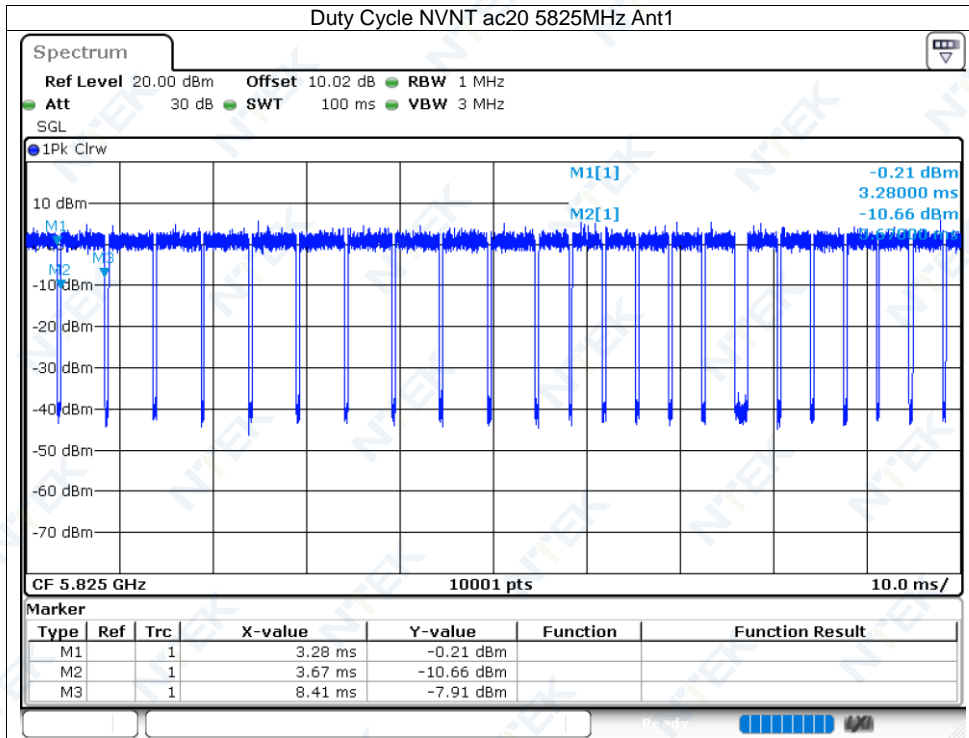

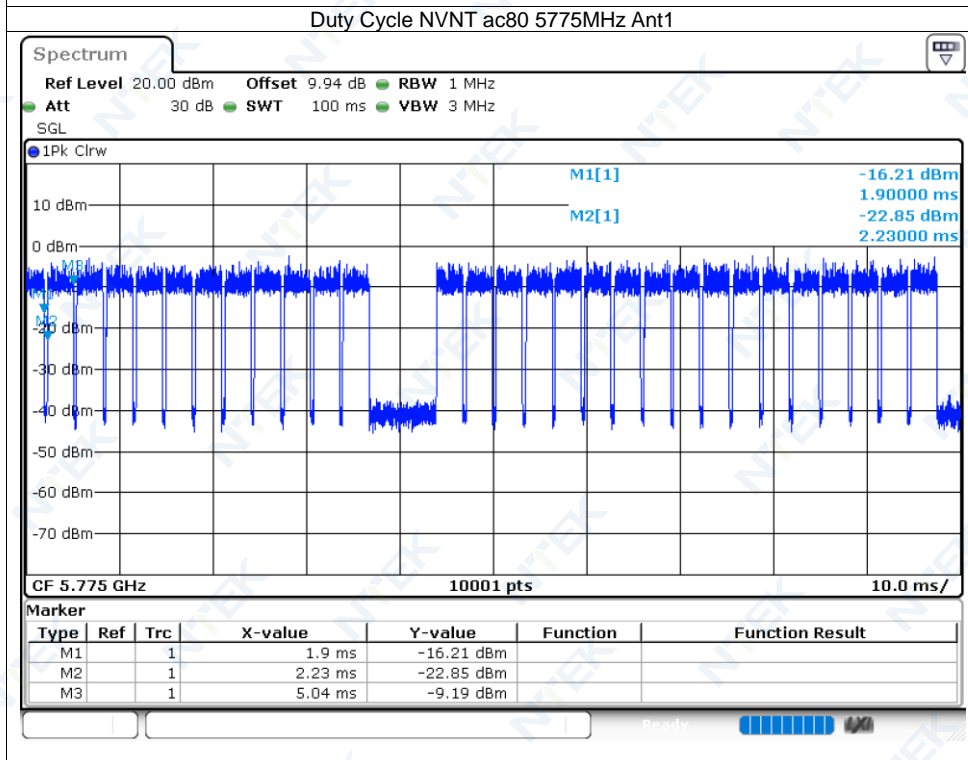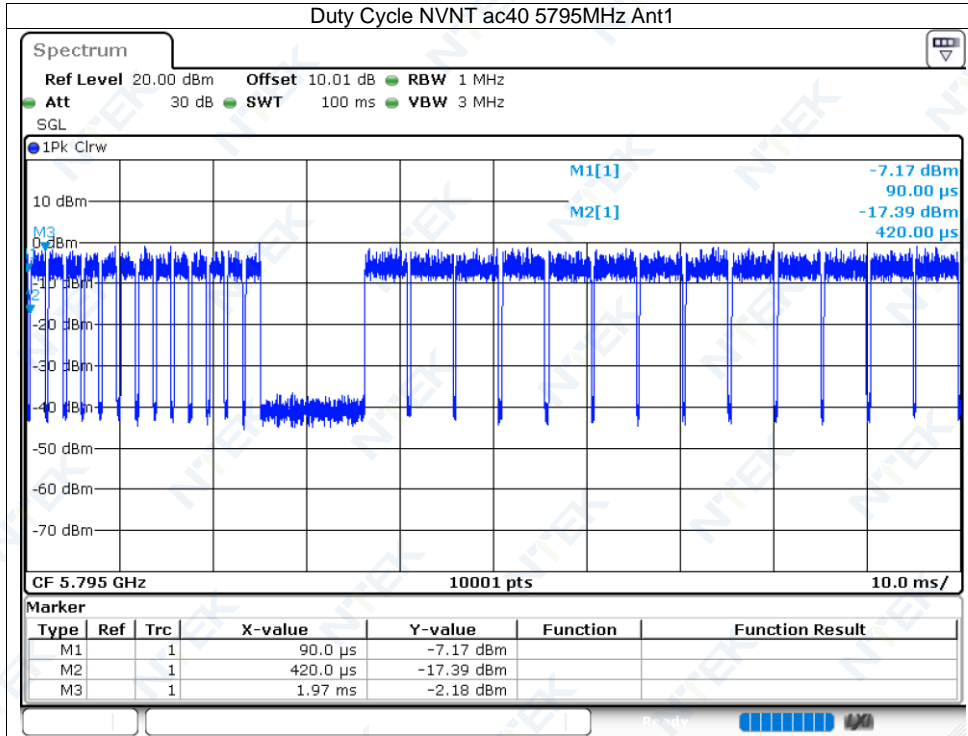

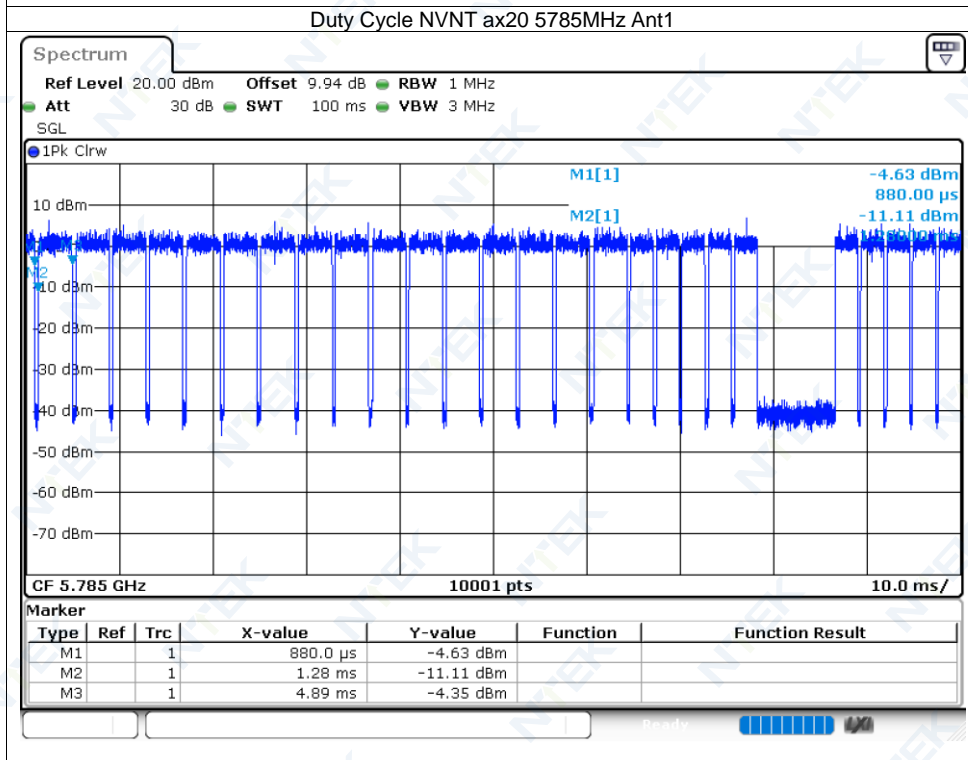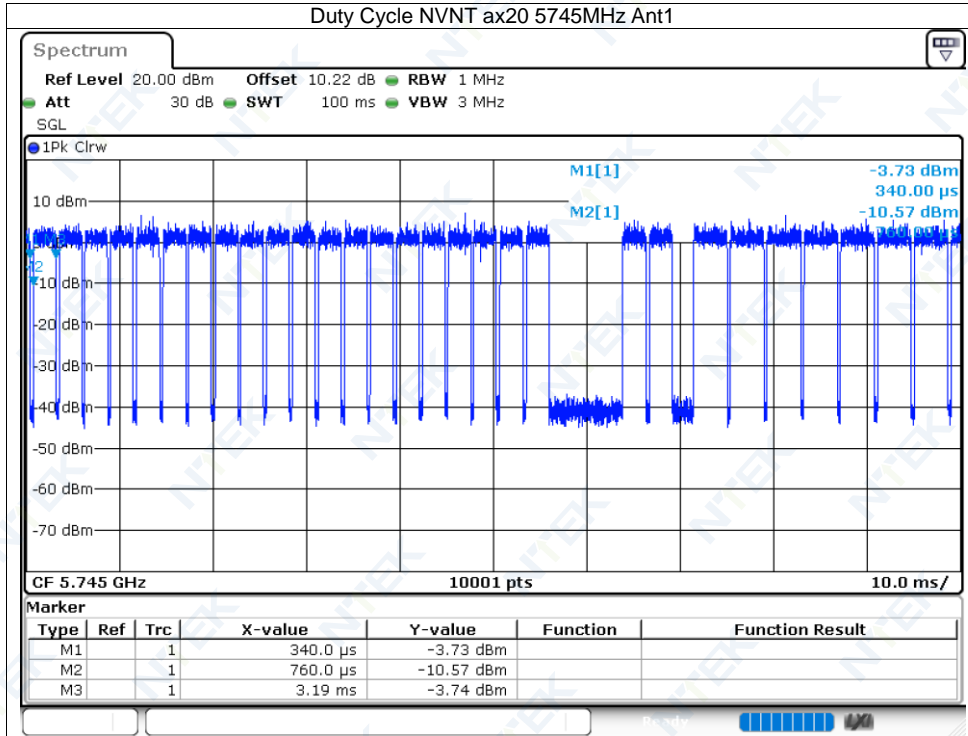


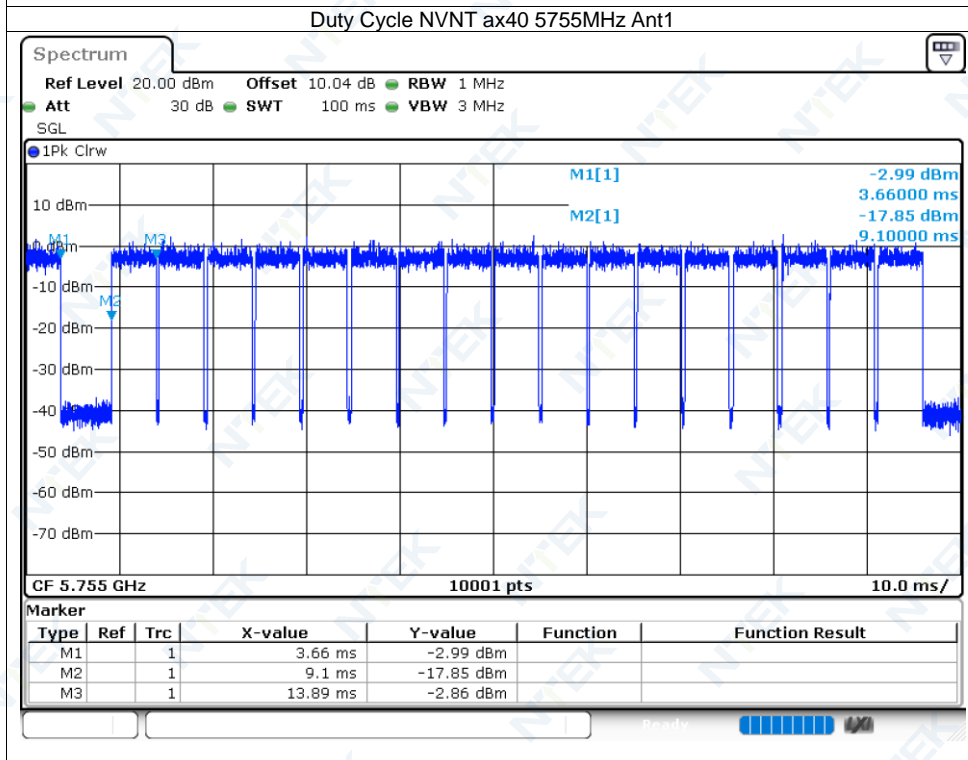
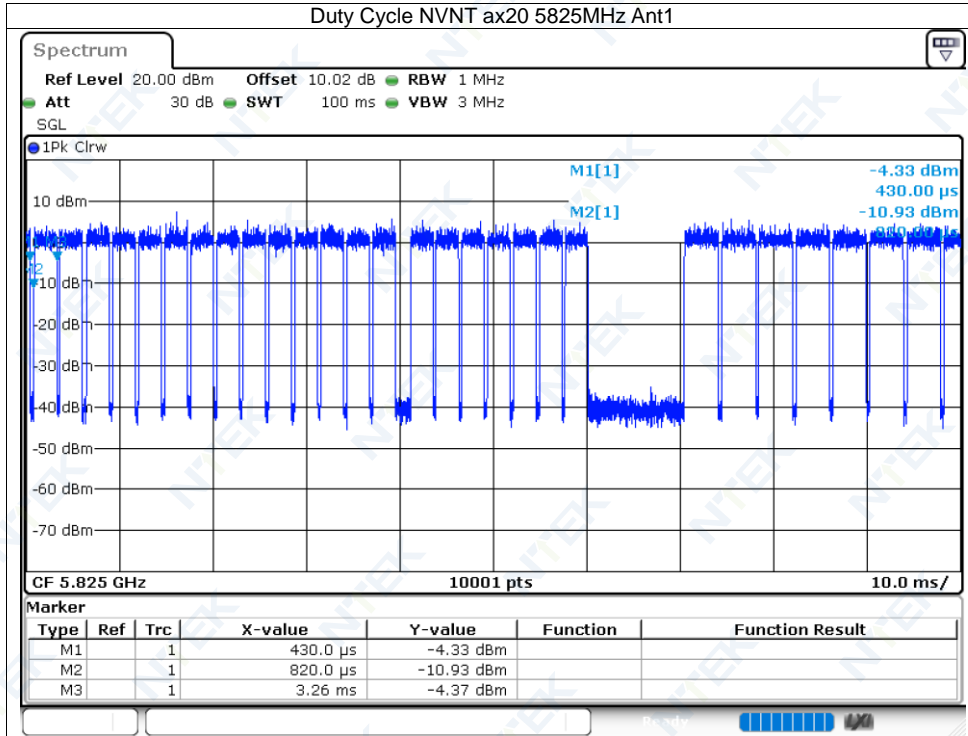


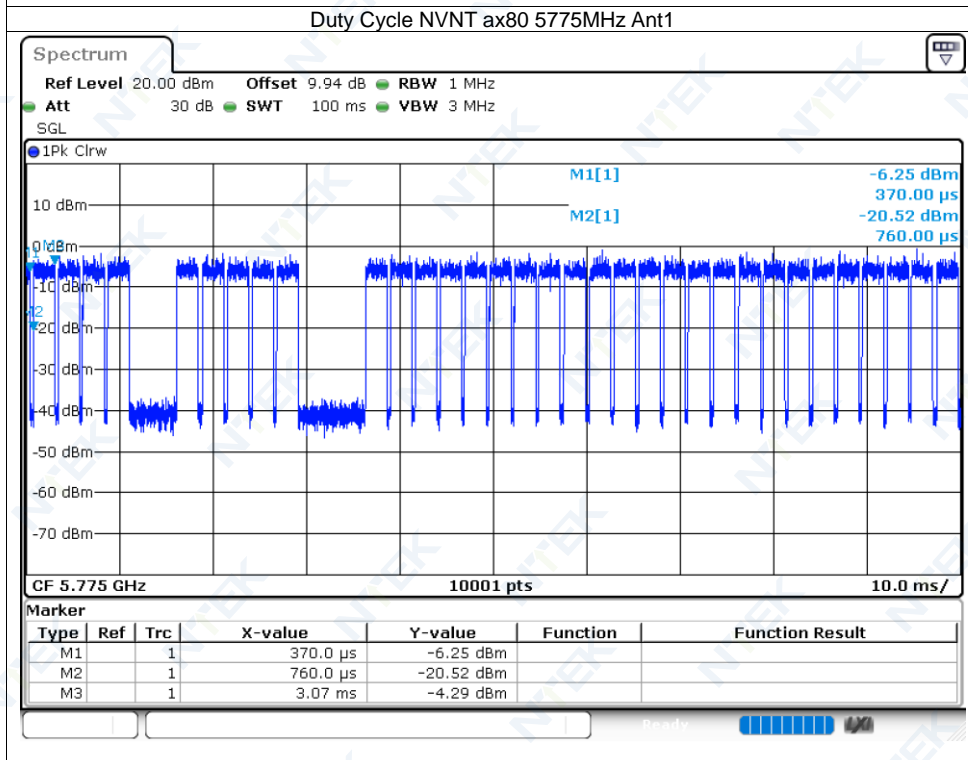
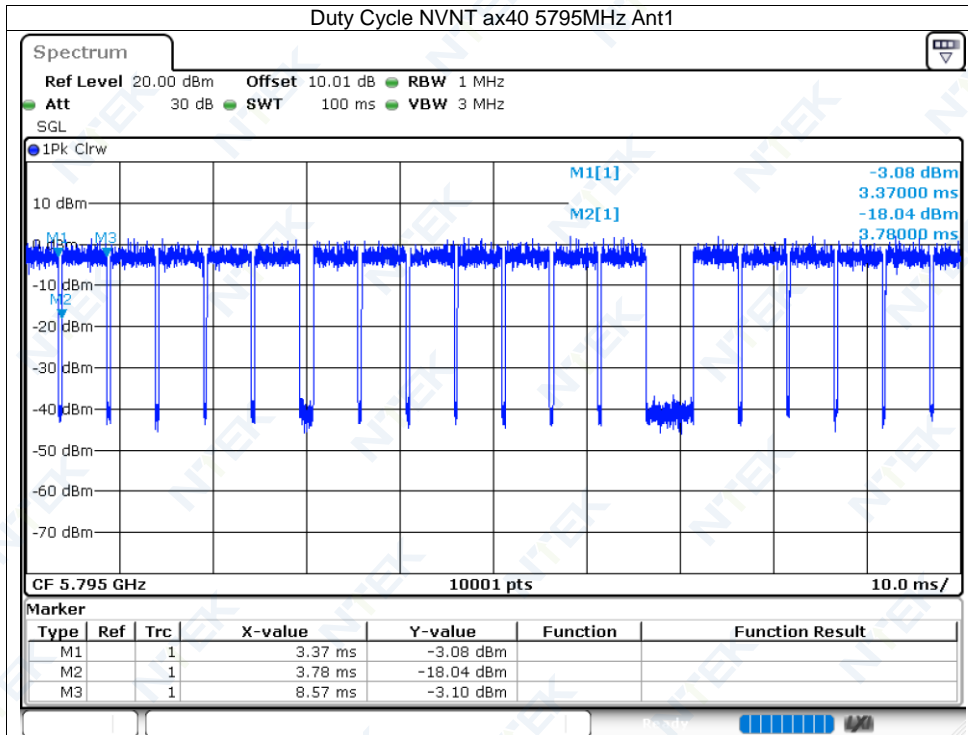




10.2 -6DB EMISSION BANDWIDTH



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.47	0.5	Pass
NVNT	a	5785	Ant1	16.56	0.5	Pass
NVNT	a	5825	Ant1	16.59	0.5	Pass
NVNT	n20	5745	Ant1	17.82	0.5	Pass
NVNT	n20	5785	Ant1	17.67	0.5	Pass
NVNT	n20	5825	Ant1	17.79	0.5	Pass
NVNT	n40	5755	Ant1	36.54	0.5	Pass
NVNT	n40	5795	Ant1	36.36	0.5	Pass
NVNT	ac20	5745	Ant1	17.64	0.5	Pass
NVNT	ac20	5785	Ant1	17.82	0.5	Pass
NVNT	ac20	5825	Ant1	17.82	0.5	Pass
NVNT	ac40	5755	Ant1	36.3	0.5	Pass
NVNT	ac40	5795	Ant1	36.36	0.5	Pass
NVNT	ac80	5775	Ant1	74.88	0.5	Pass
NVNT	ax20	5745	Ant1	19.08	0.5	Pass
NVNT	ax20	5785	Ant1	19.14	0.5	Pass
NVNT	ax20	5825	Ant1	18.96	0.5	Pass
NVNT	ax40	5755	Ant1	37.86	0.5	Pass
NVNT	ax40	5795	Ant1	38.22	0.5	Pass
NVNT	ax80	5775	Ant1	77.64	0.5	Pass


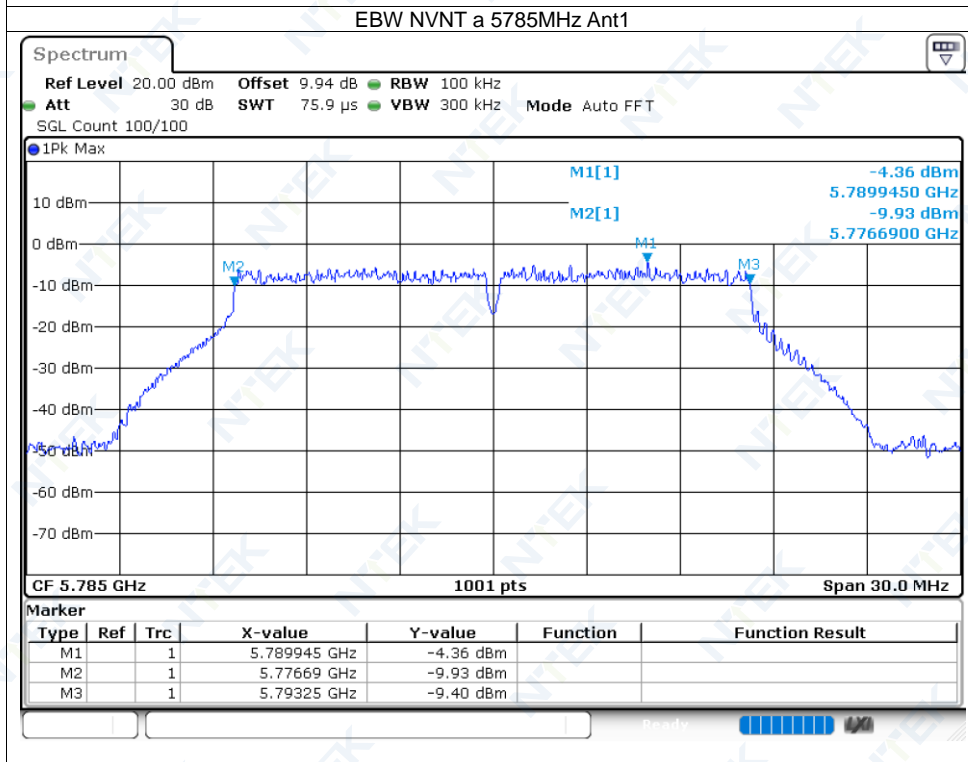


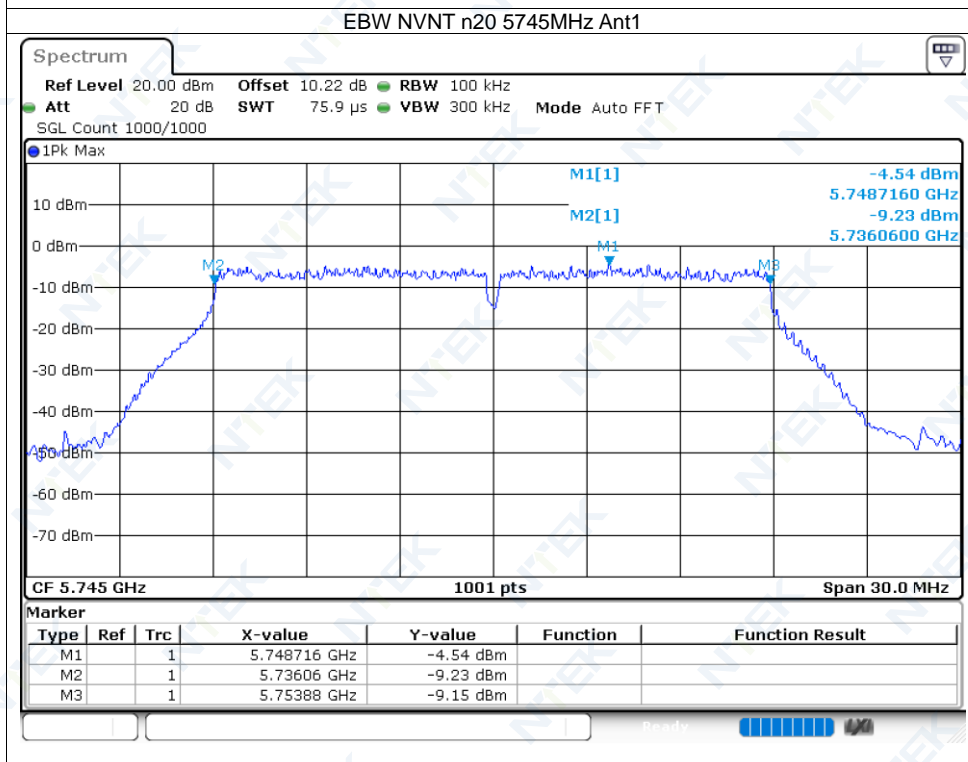
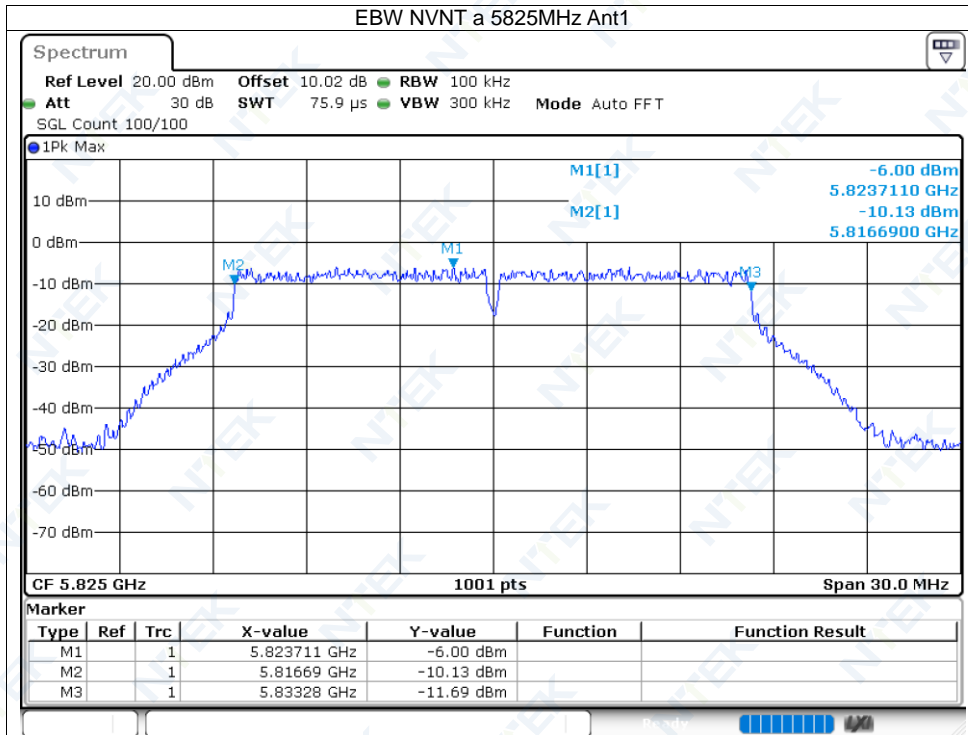


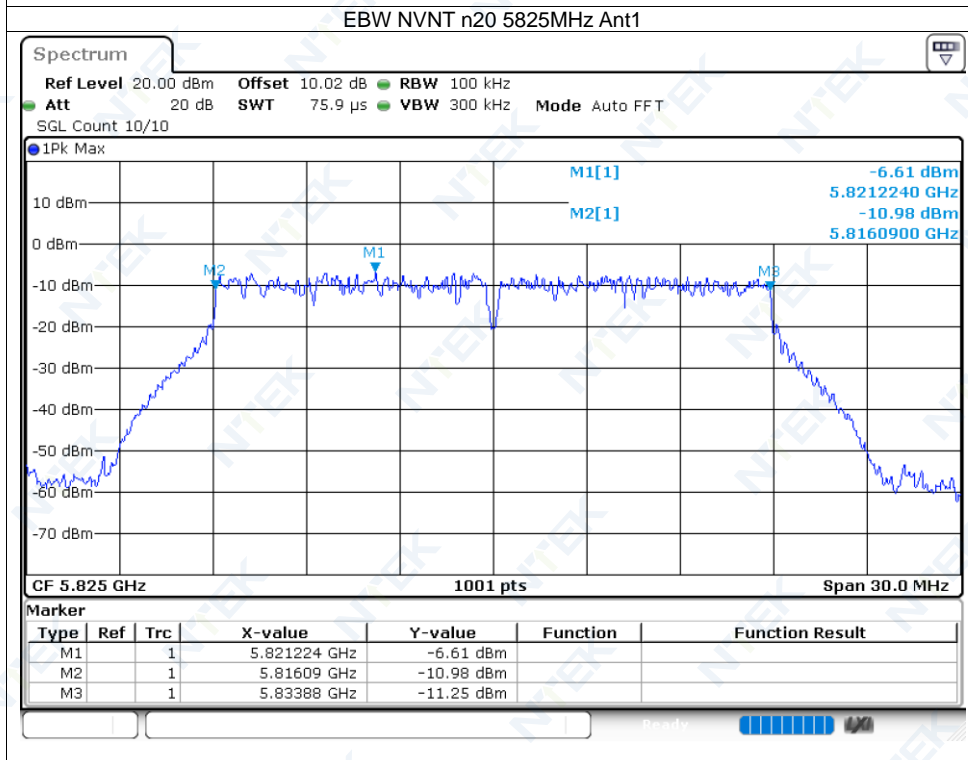
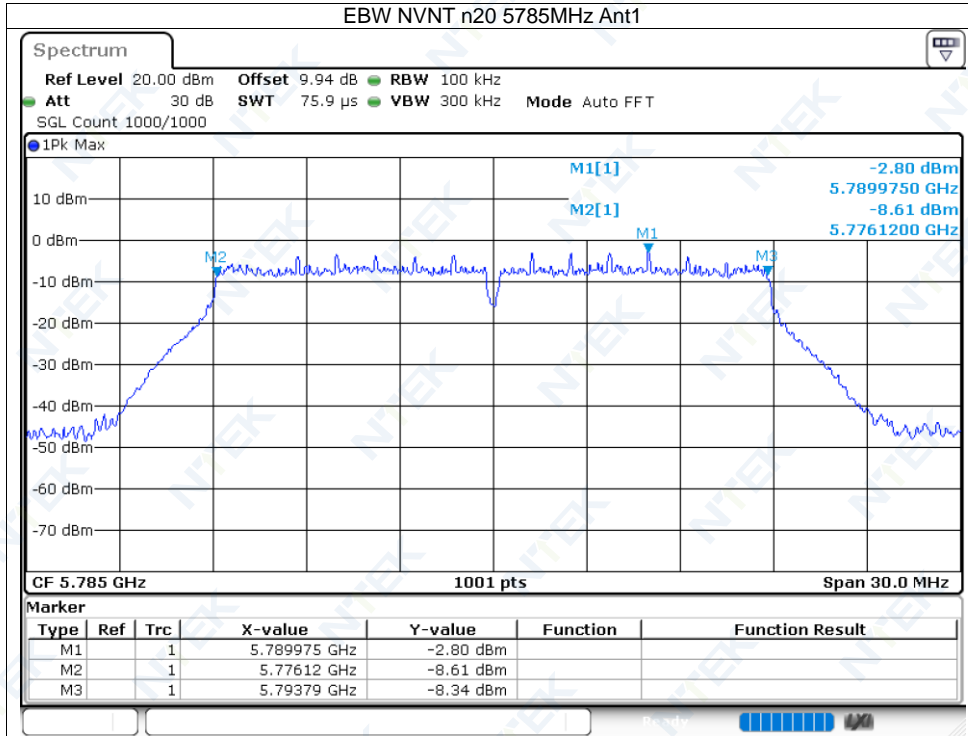


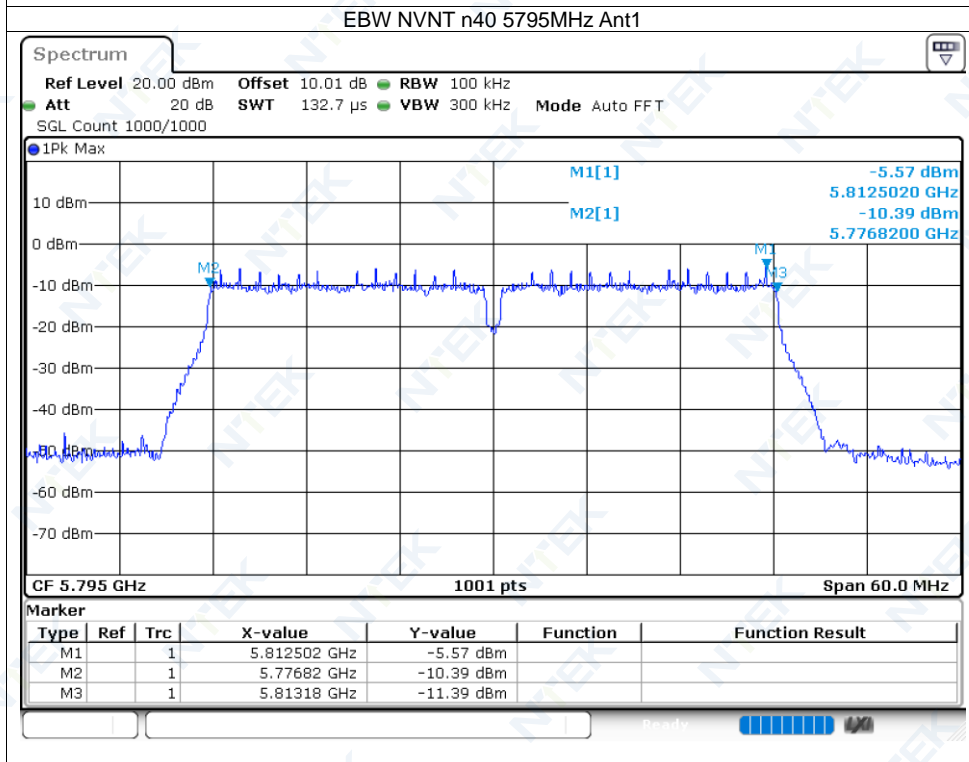
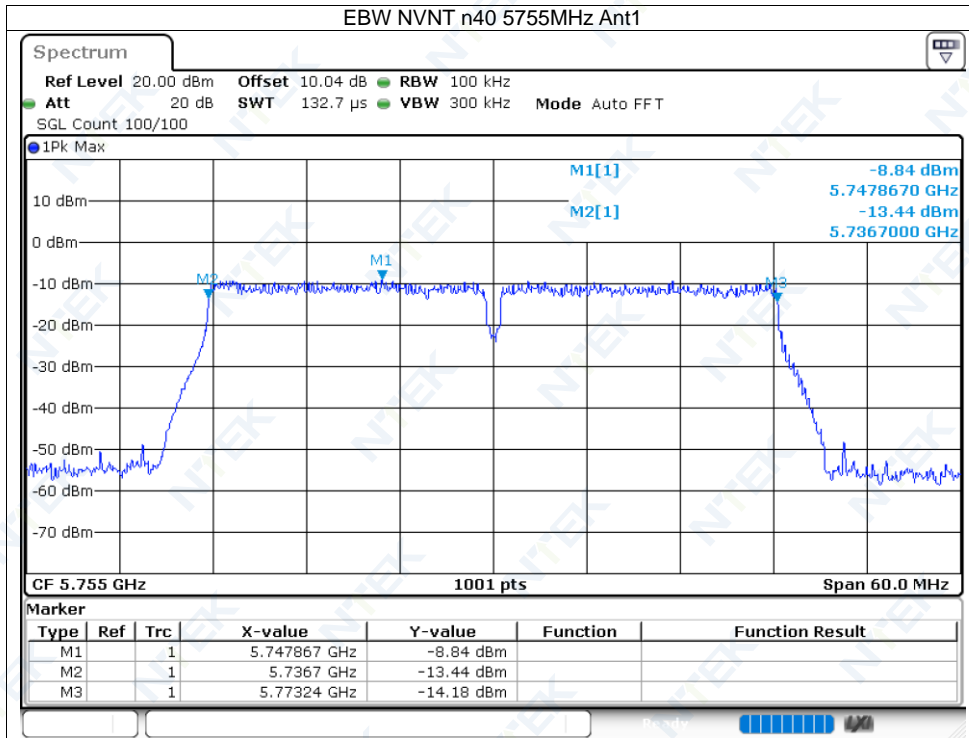


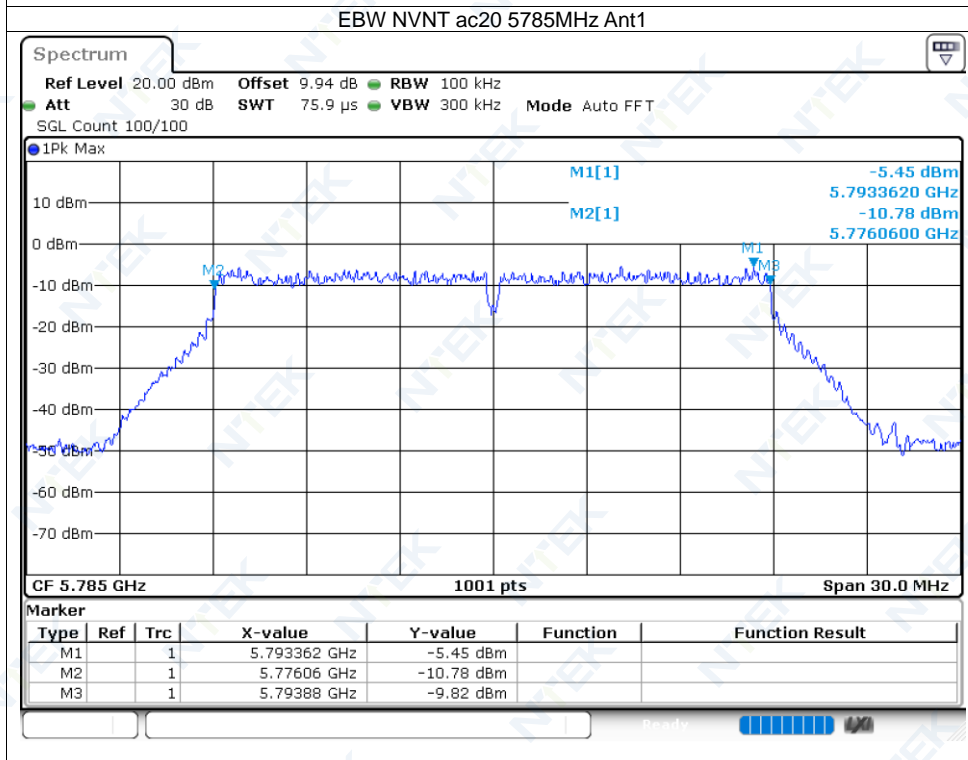
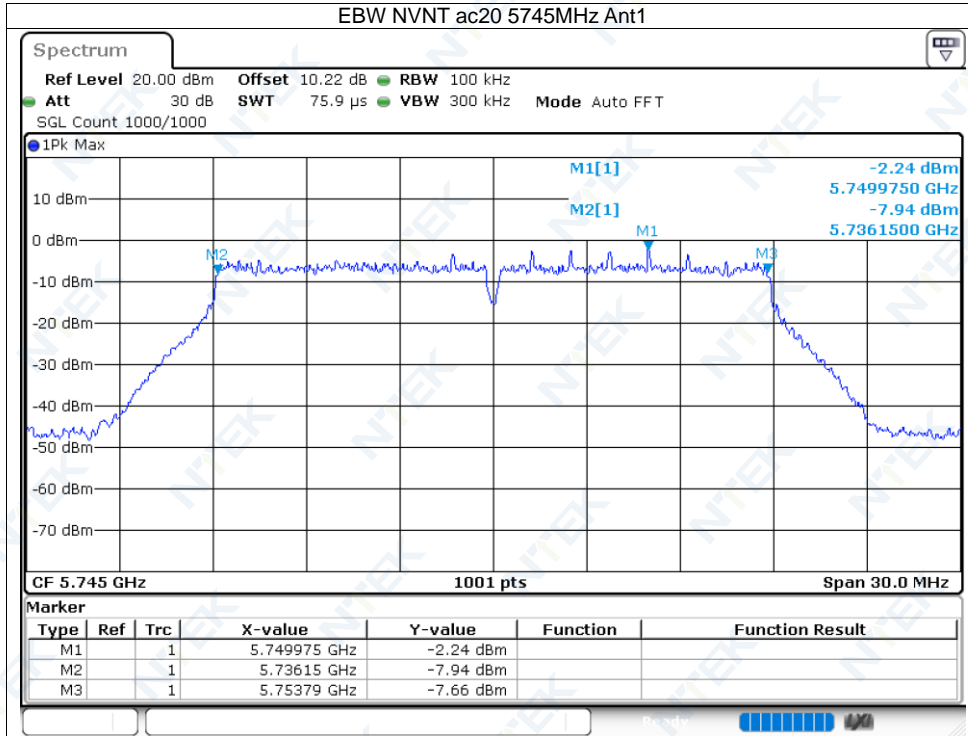


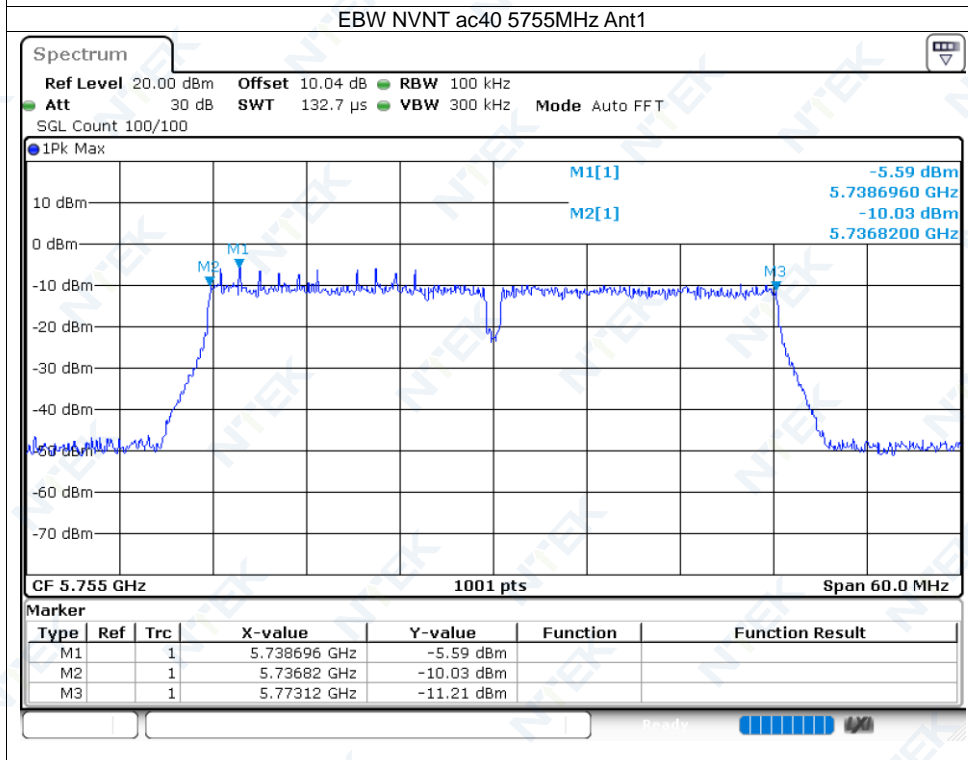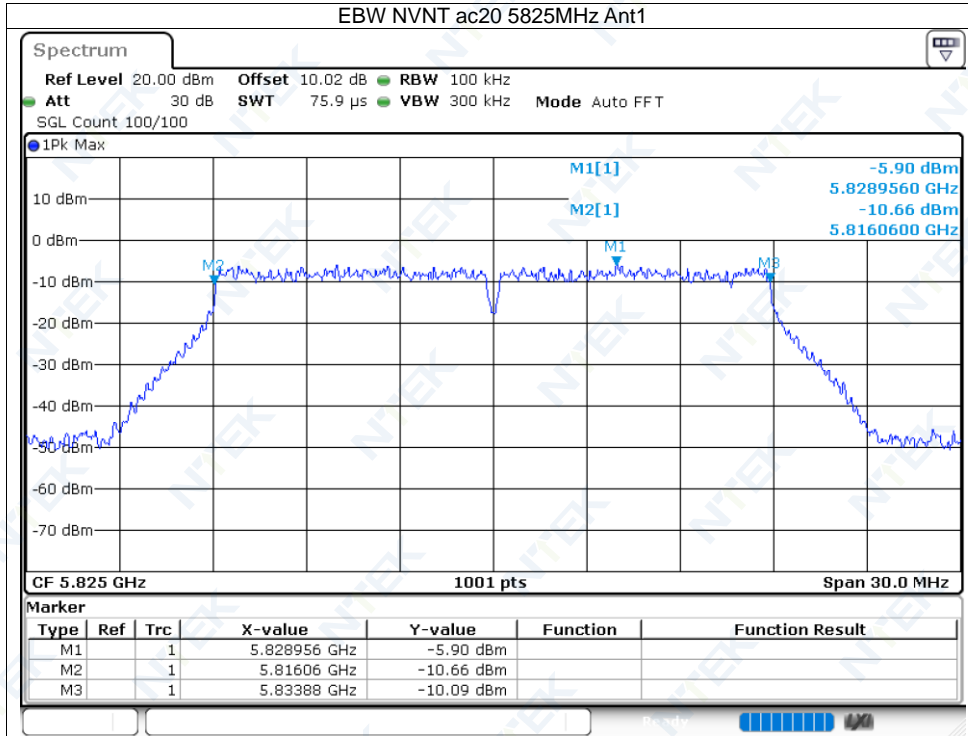

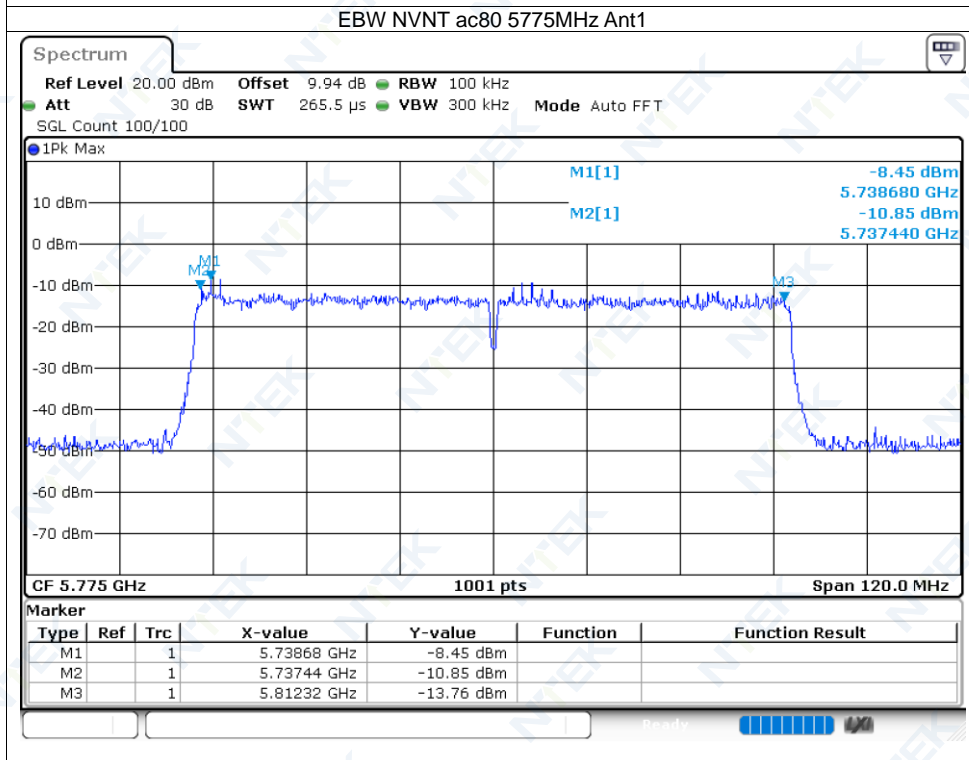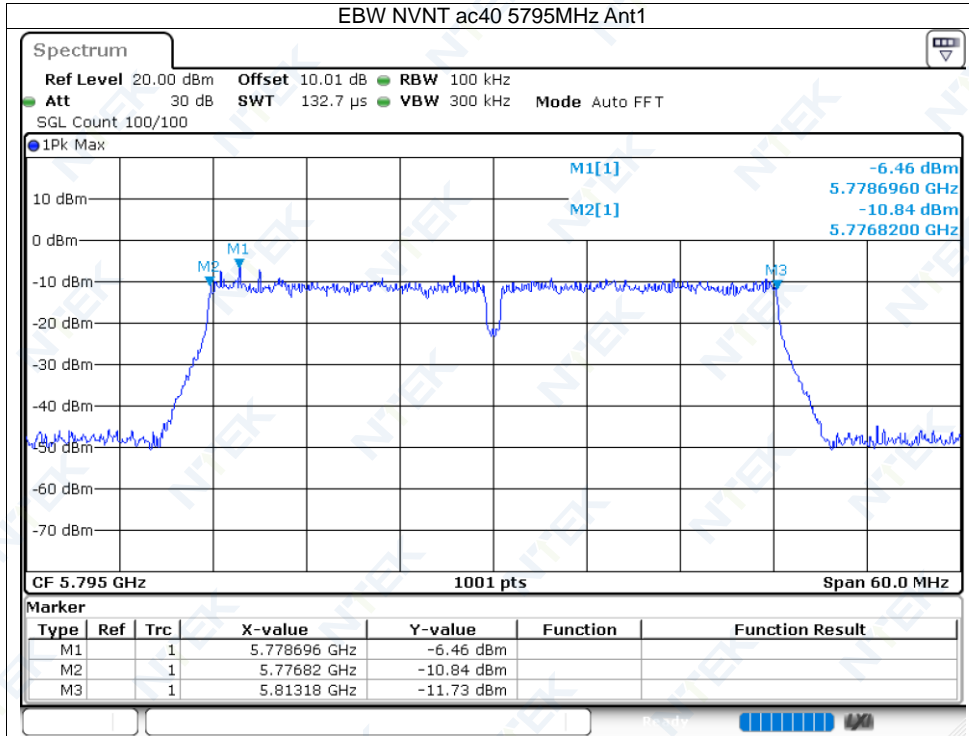

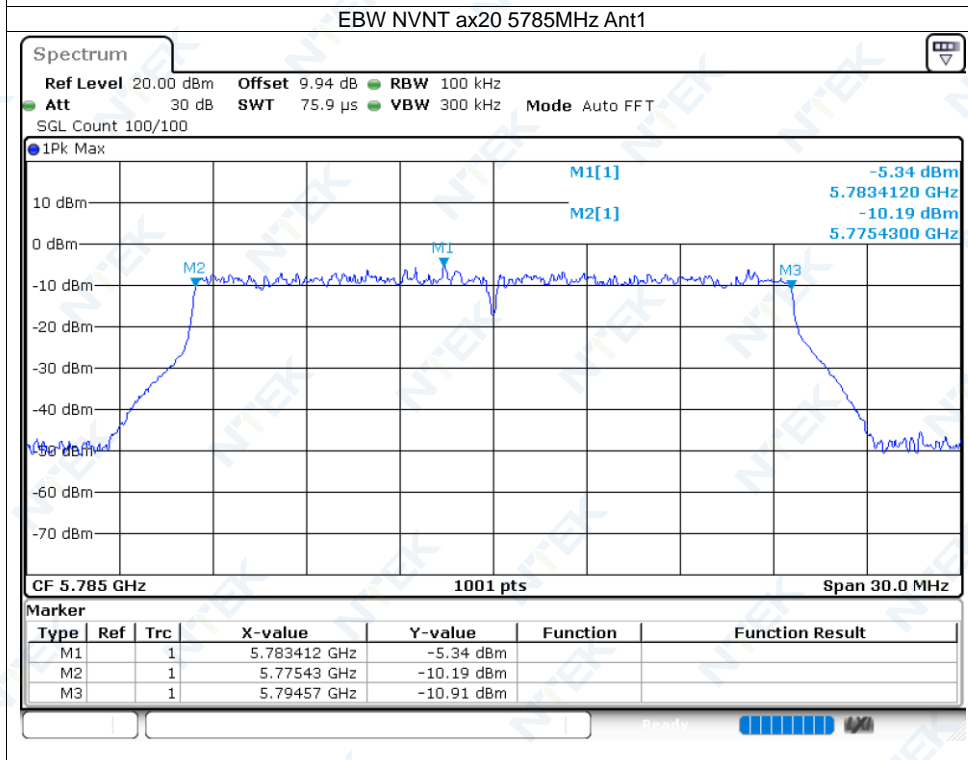
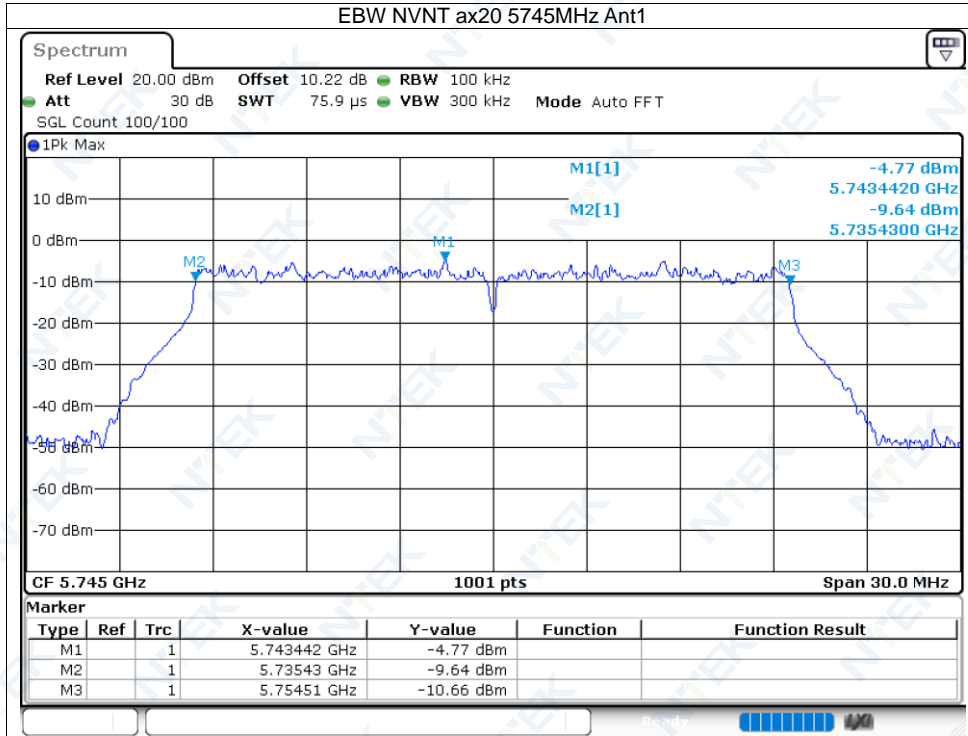


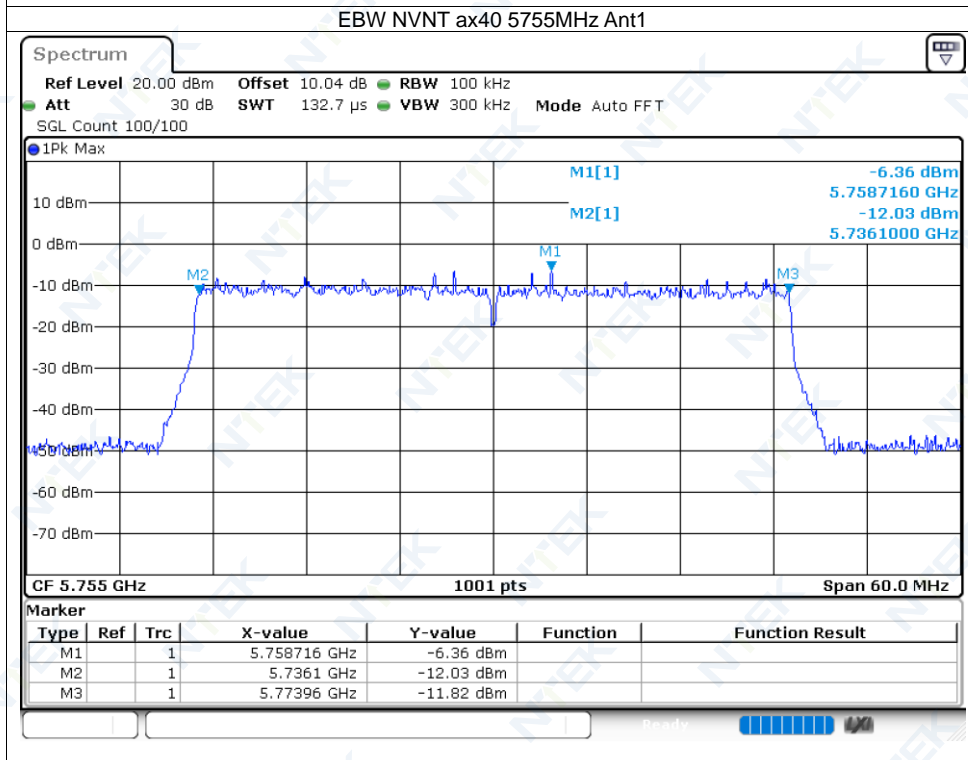
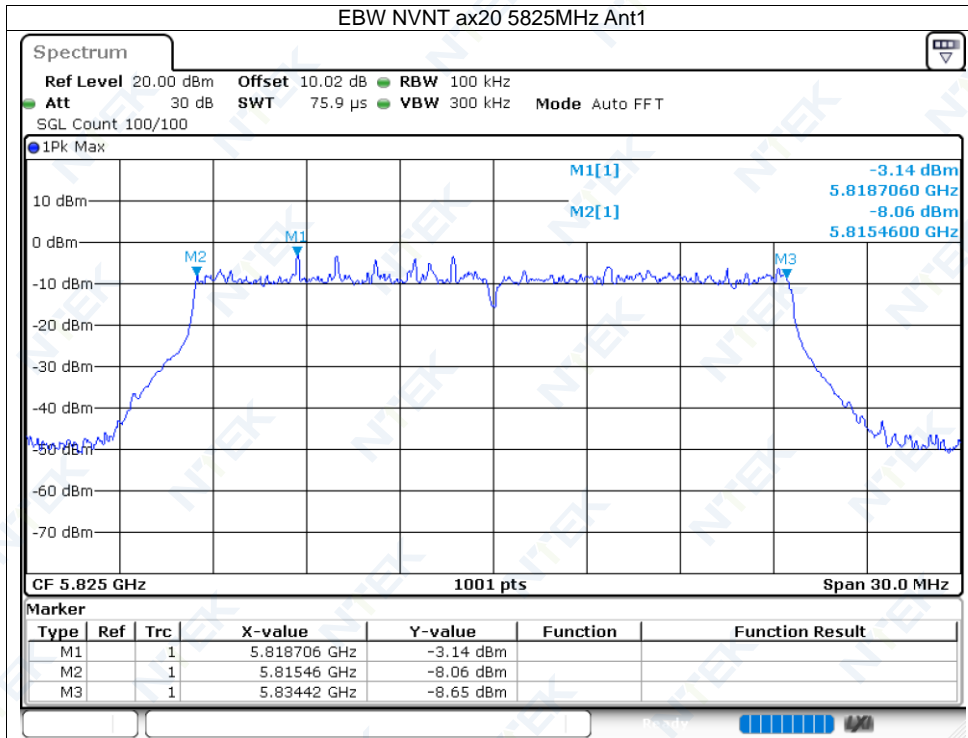


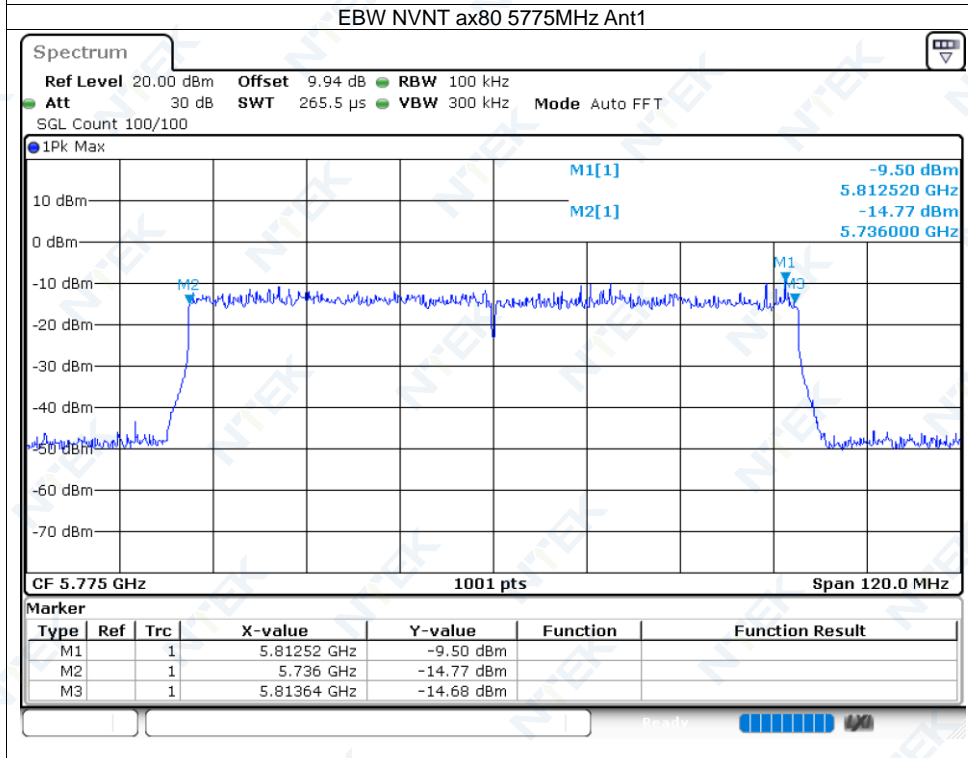
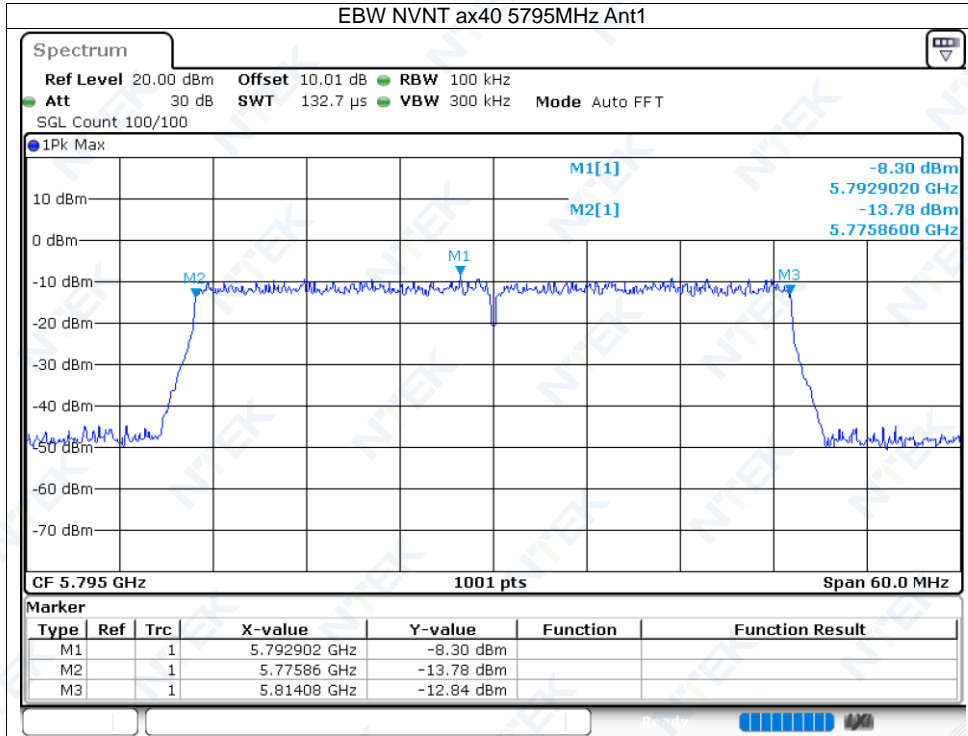




10.3 FREQUENCY RANGE



Condition	Mode	Frequency (MHz)	Antenna	Frequency Range (MHz)	Limit (MHz)	Verdict
NVNT	a	5745	Ant1	5734.56	>=5725	Pass
NVNT	a	5825	Ant1	5835.08	<=5875	Pass
NVNT	n20	5745	Ant1	5734.56	>=5725	Pass
NVNT	n20	5825	Ant1	5835.08	<=5875	Pass
NVNT	n40	5755	Ant1	5736.16	>=5725	Pass
NVNT	n40	5795	Ant1	5813.84	<=5875	Pass
NVNT	ac20	5745	Ant1	5734.56	>=5725	Pass
NVNT	ac20	5825	Ant1	5835.4	<=5875	Pass
NVNT	ac40	5755	Ant1	5735.92	>=5725	Pass
NVNT	ac40	5795	Ant1	5813.78	<=5875	Pass
NVNT	ac80	5775	Ant1	5736.48	>=5725	Pass
NVNT	ax20	5745	Ant1	5734.88	>=5725	Pass
NVNT	ax20	5825	Ant1	5835.04	<=5875	Pass
NVNT	ax40	5755	Ant1	5735.62	>=5725	Pass
NVNT	ax40	5795	Ant1	5814.32	<=5875	Pass

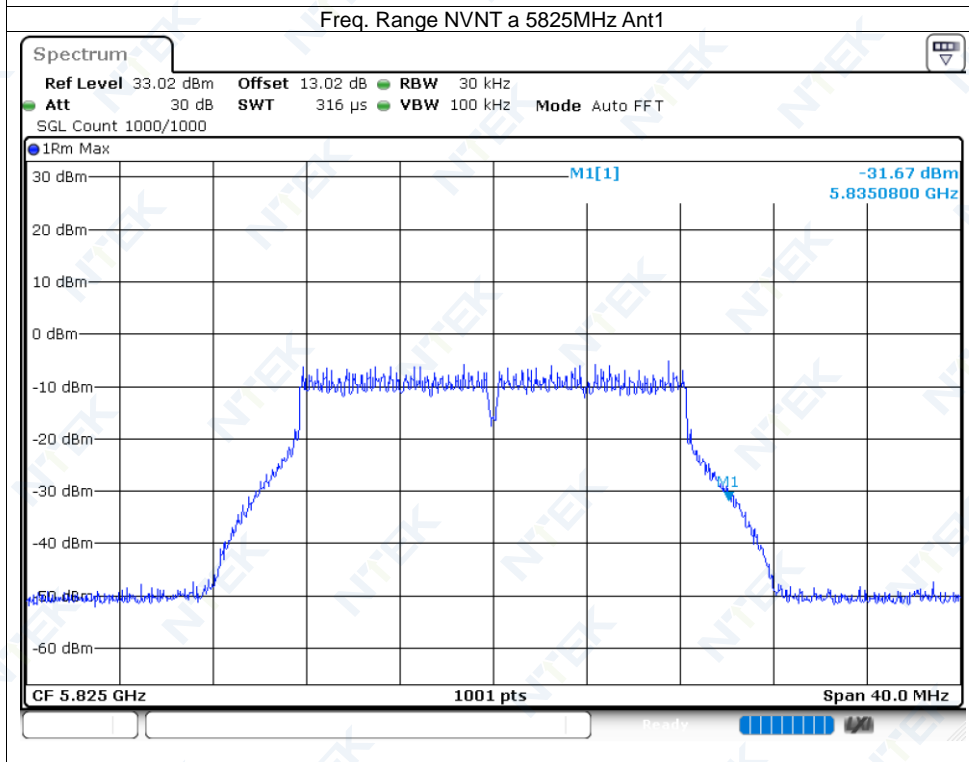
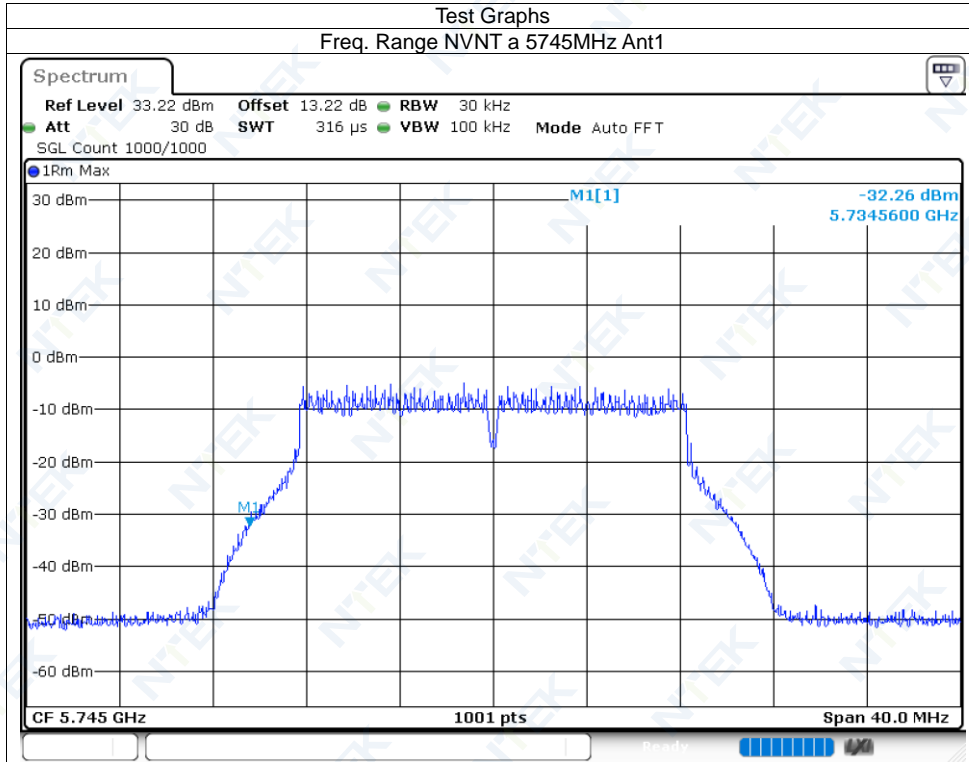


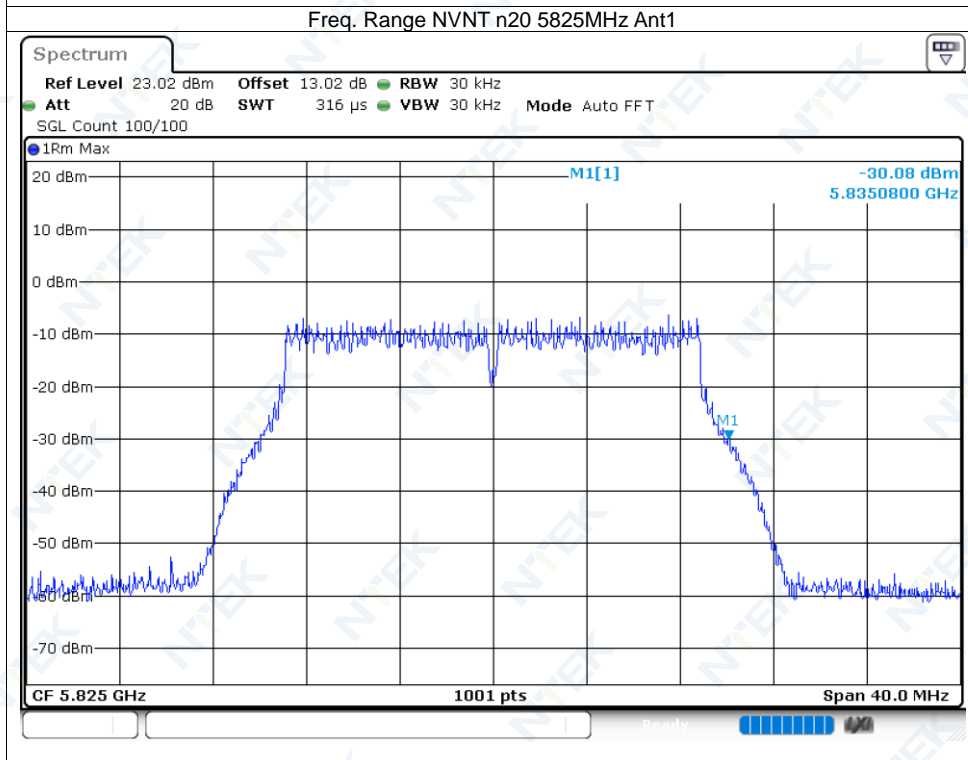
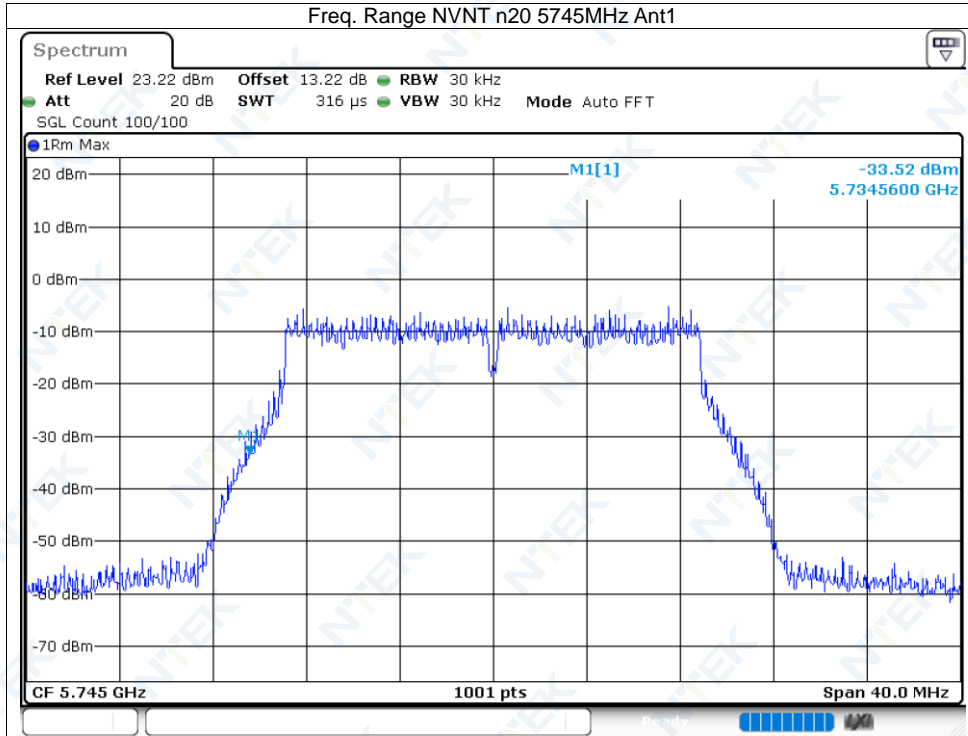


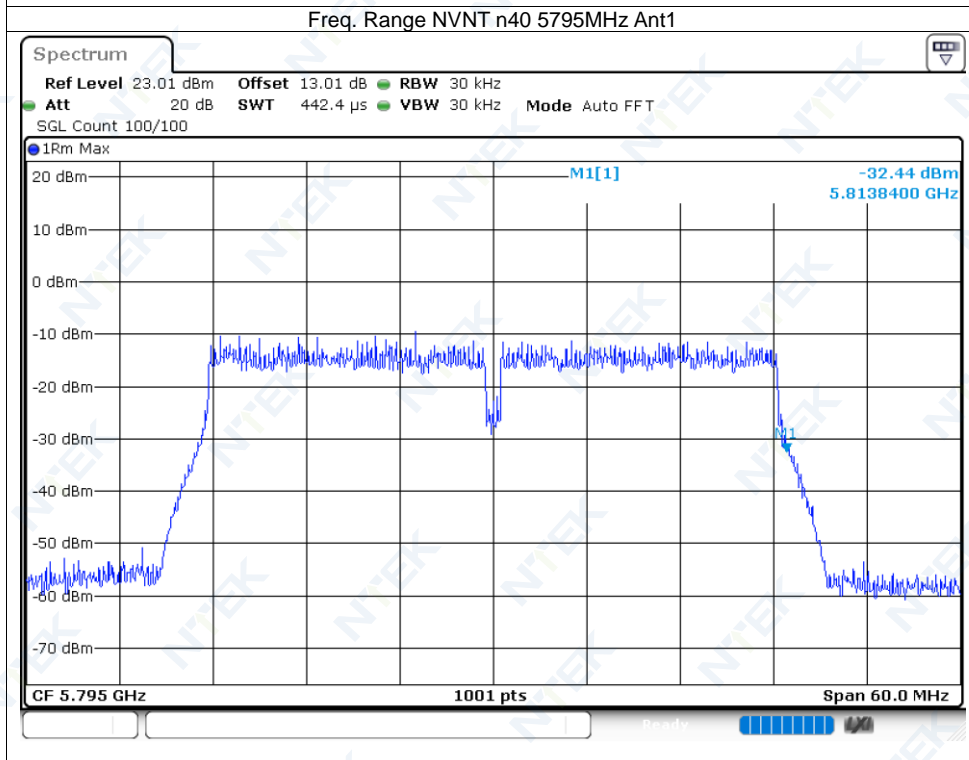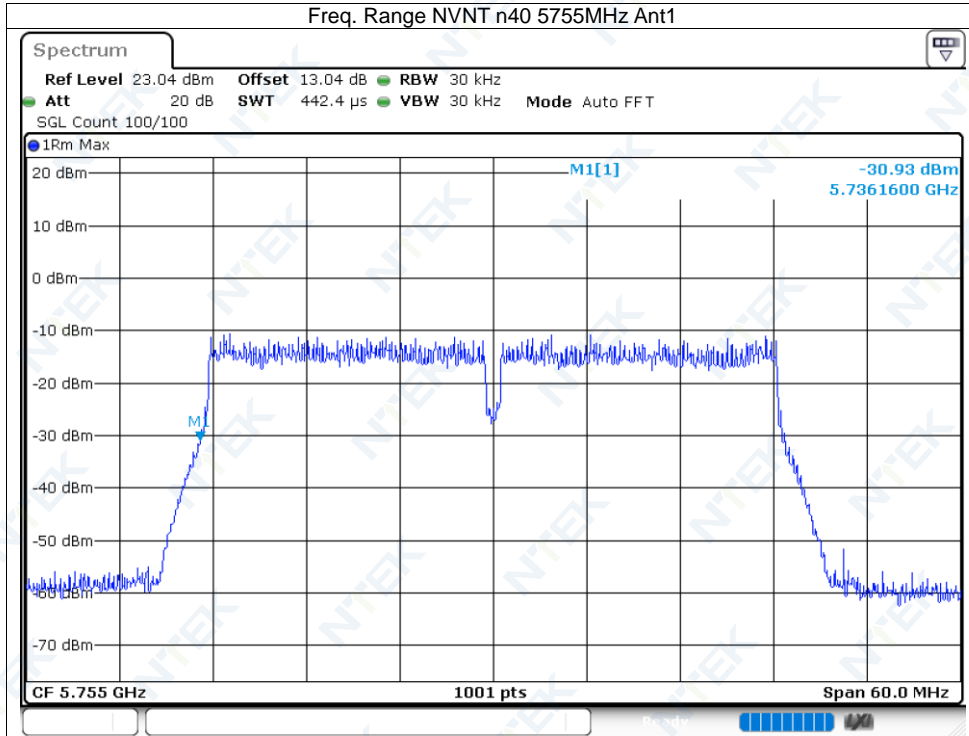


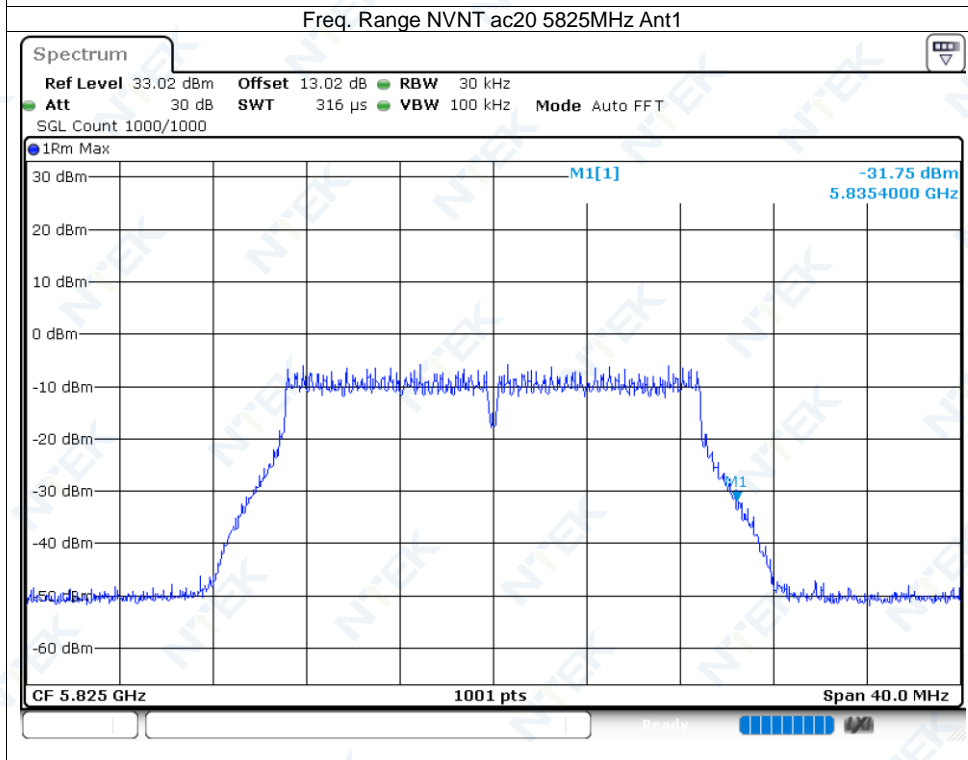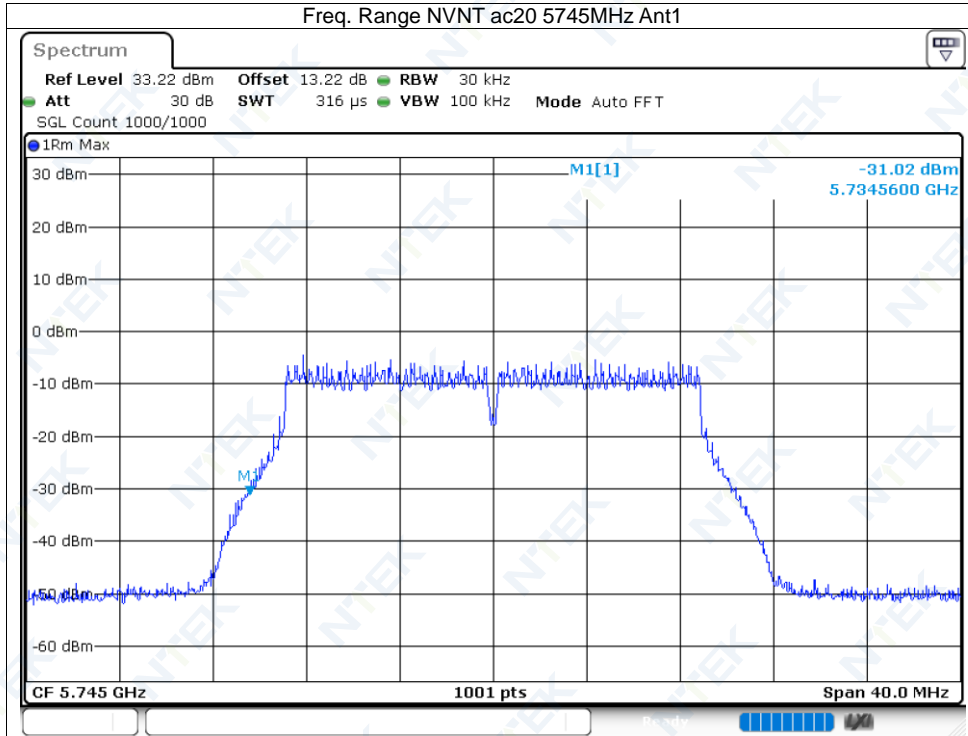

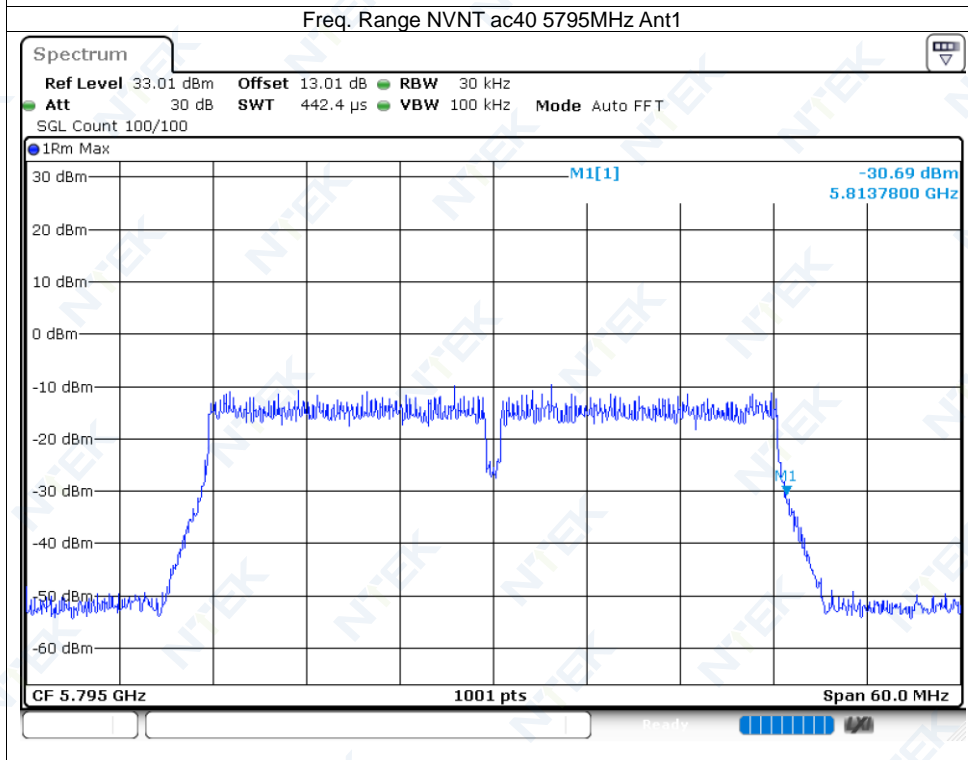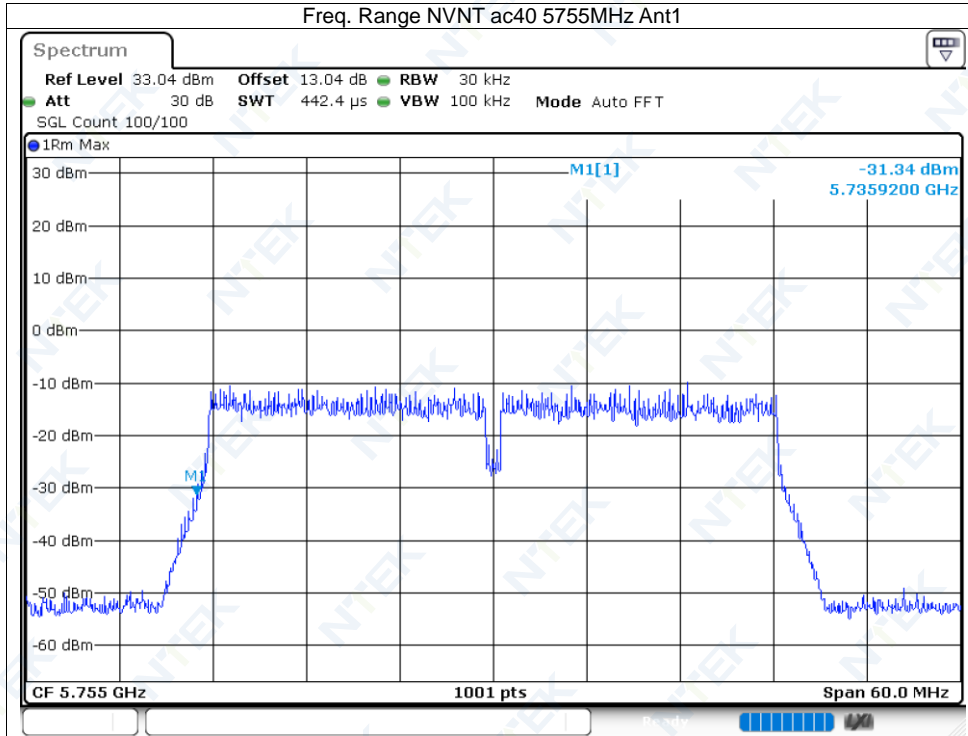

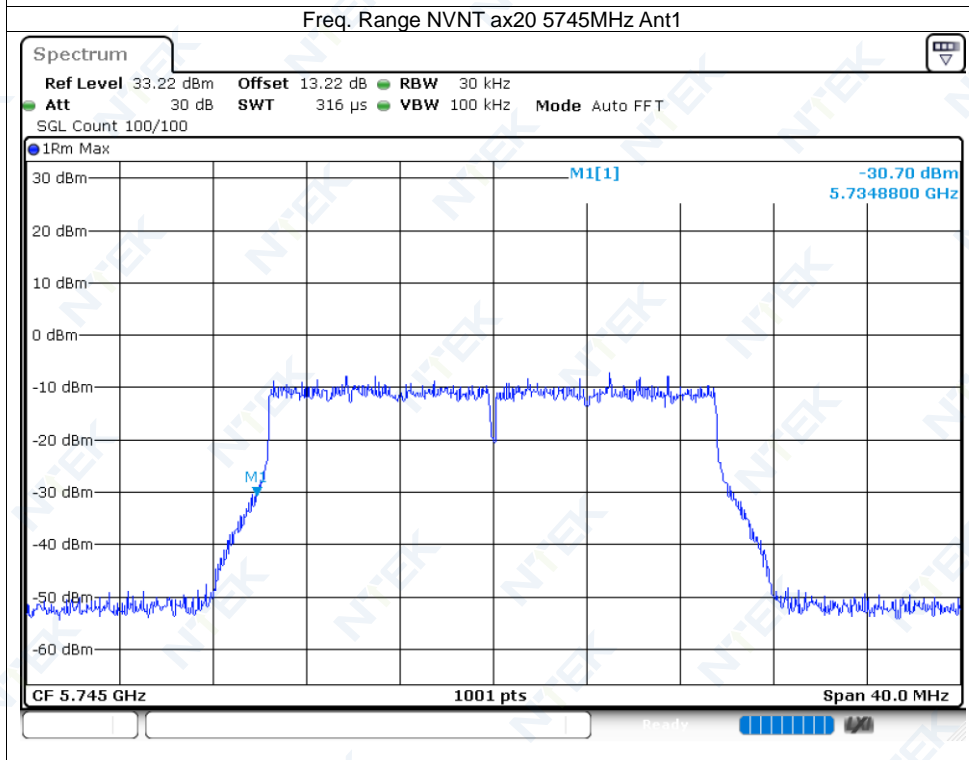
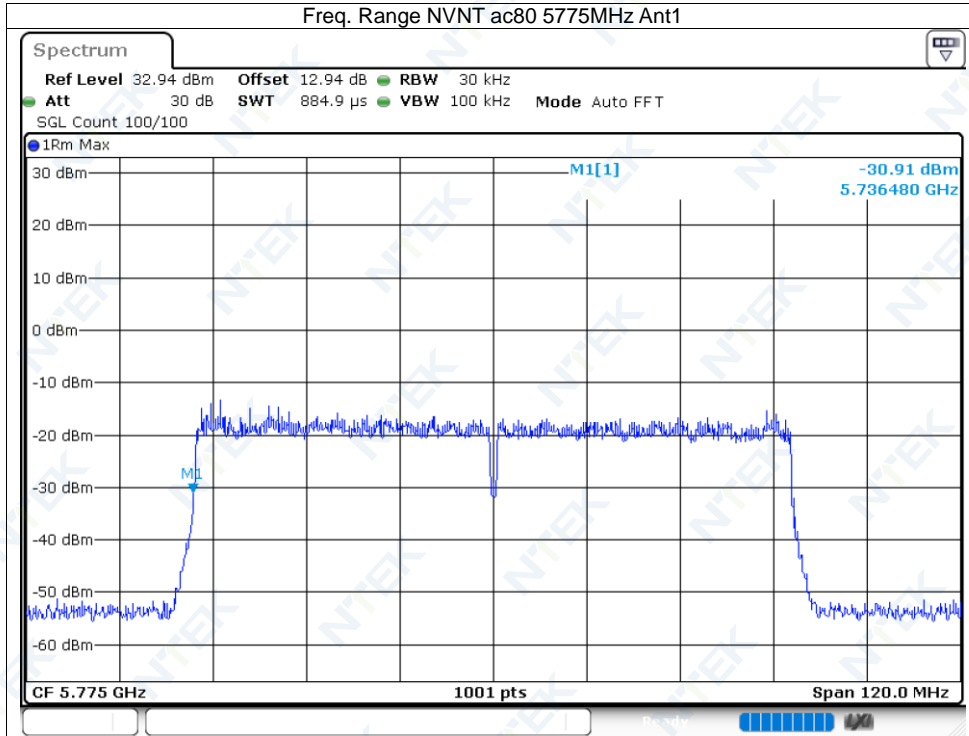


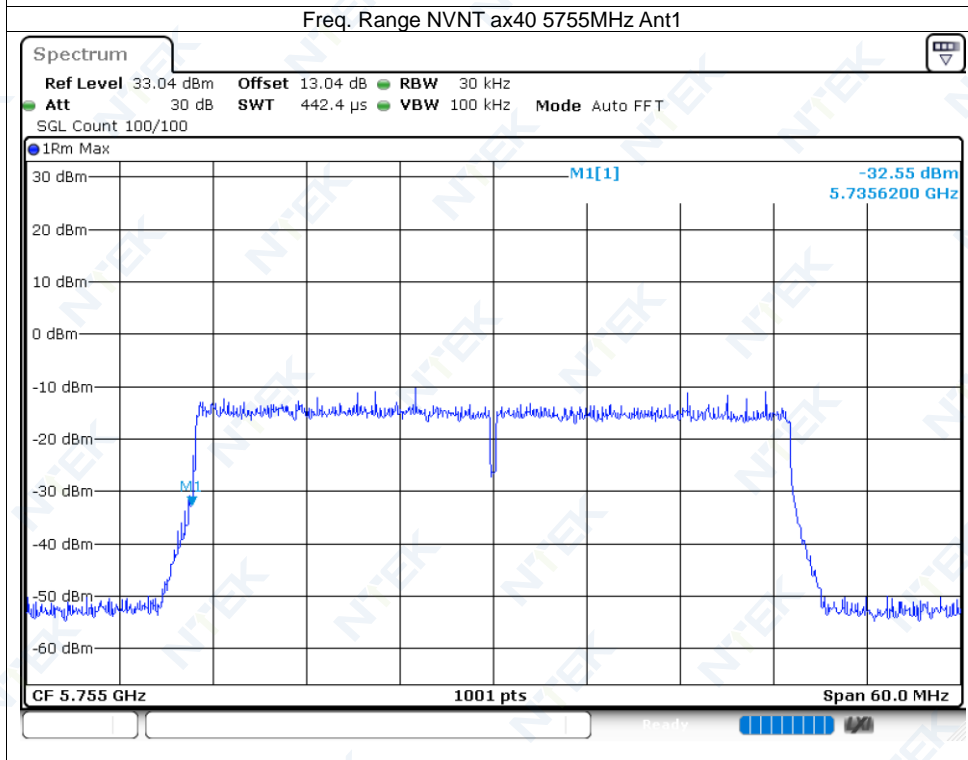
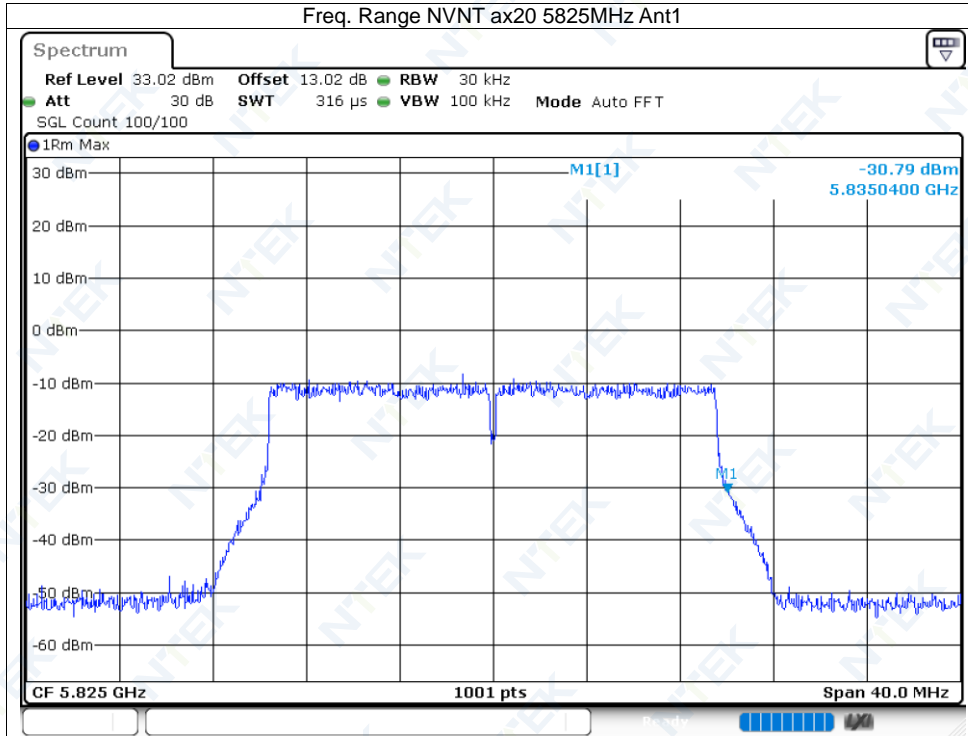



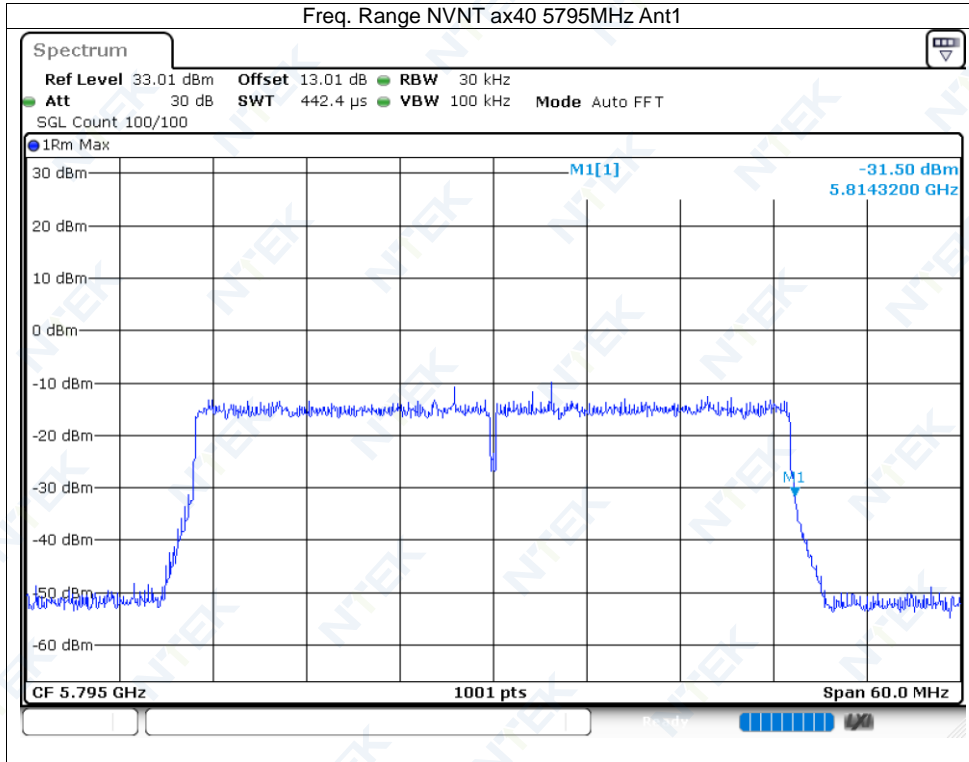




10.4 OCCUPIED CHANNEL BANDWIDTH



Condition	Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Verdict
NVNT	a	5745	Ant1	5744.962	16.65	Pass
NVNT	a	5785	Ant1	5784.97	16.642	Pass
NVNT	a	5825	Ant1	5824.972	16.646	Pass
NVNT	n20	5745	Ant1	5744.966	17.842	Pass
NVNT	n20	5785	Ant1	5784.974	17.842	Pass
NVNT	n20	5825	Ant1	5824.972	17.838	Pass
NVNT	n40	5755	Ant1	5754.952	36.364	Pass
NVNT	n40	5795	Ant1	5794.976	36.364	Pass
NVNT	ac20	5745	Ant1	5744.968	17.838	Pass
NVNT	ac20	5785	Ant1	5784.974	17.834	Pass
NVNT	ac20	5825	Ant1	5824.972	17.83	Pass
NVNT	ac40	5755	Ant1	5754.948	36.356	Pass
NVNT	ac40	5795	Ant1	5794.976	36.364	Pass
NVNT	ac80	5775	Ant1	5774.904	75.672	Pass
NVNT	ax20	5745	Ant1	5744.964	19.062	Pass
NVNT	ax20	5785	Ant1	5784.97	19.058	Pass
NVNT	ax20	5825	Ant1	5824.968	19.054	Pass
NVNT	ax40	5755	Ant1	5754.944	37.868	Pass
NVNT	ax40	5795	Ant1	5794.968	37.868	Pass
NVNT	ax80	5775	Ant1	5774.912	77.512	Pass

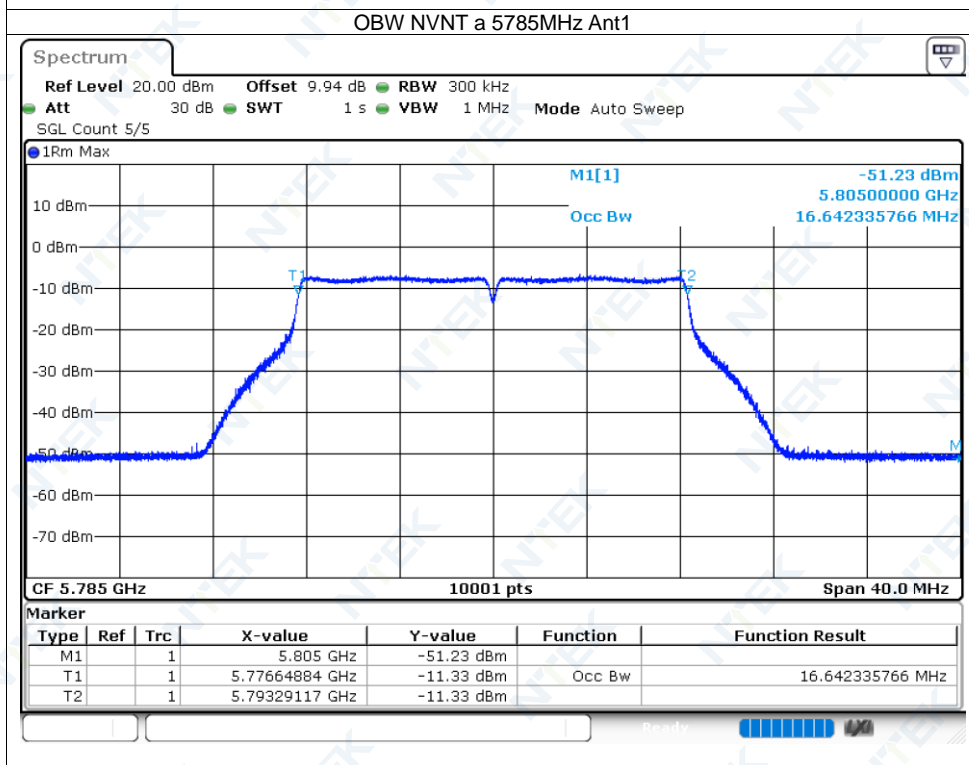
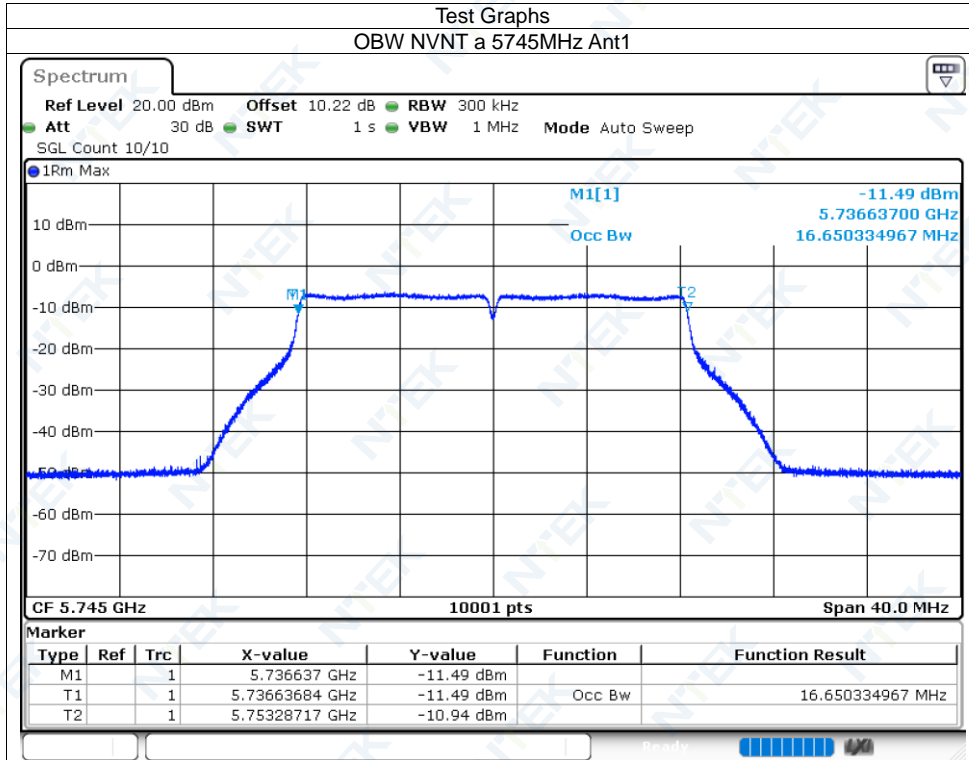


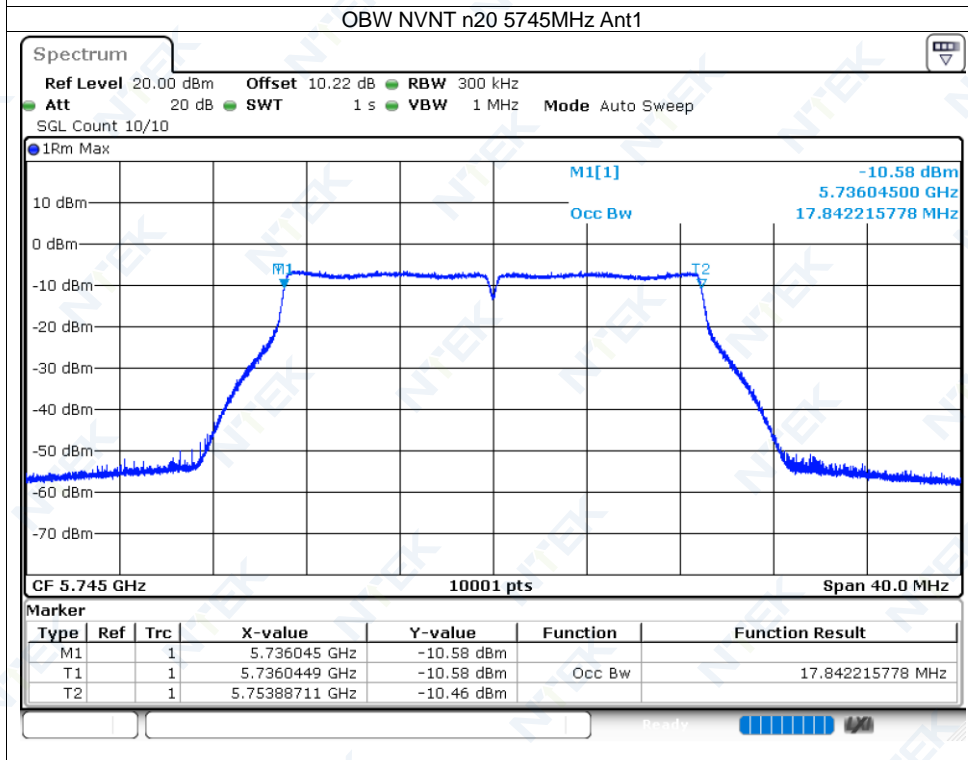
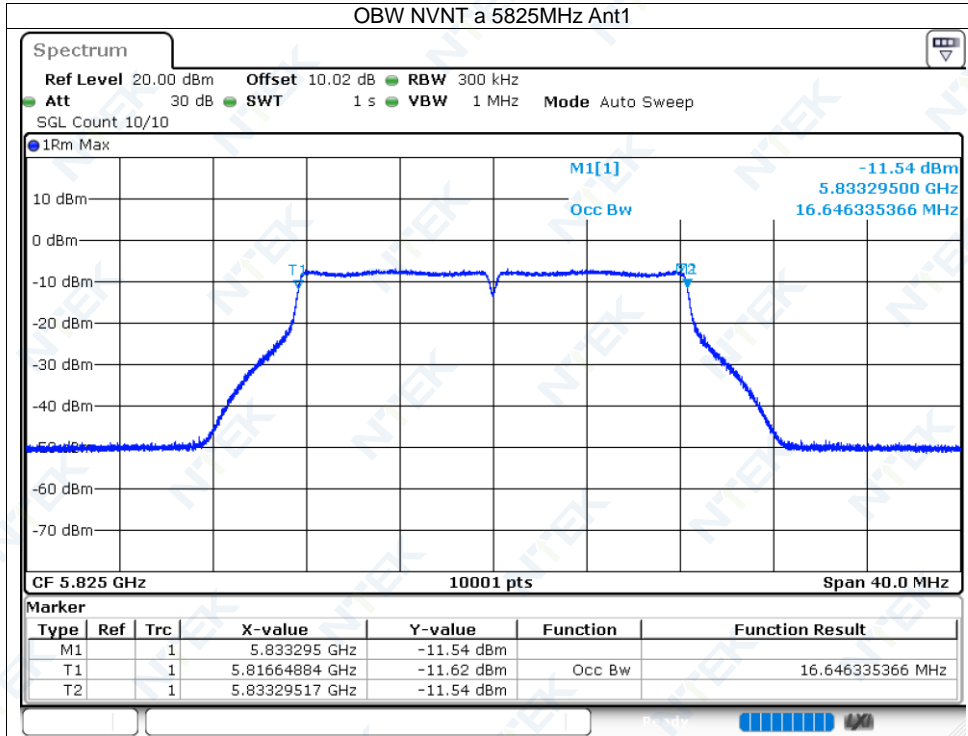


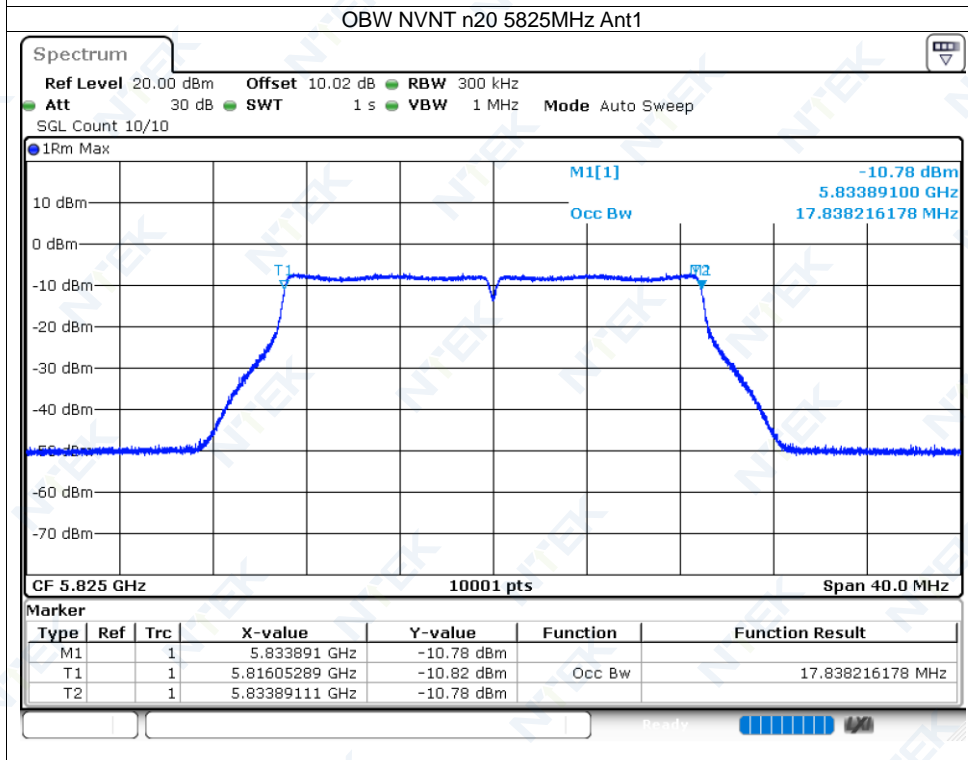
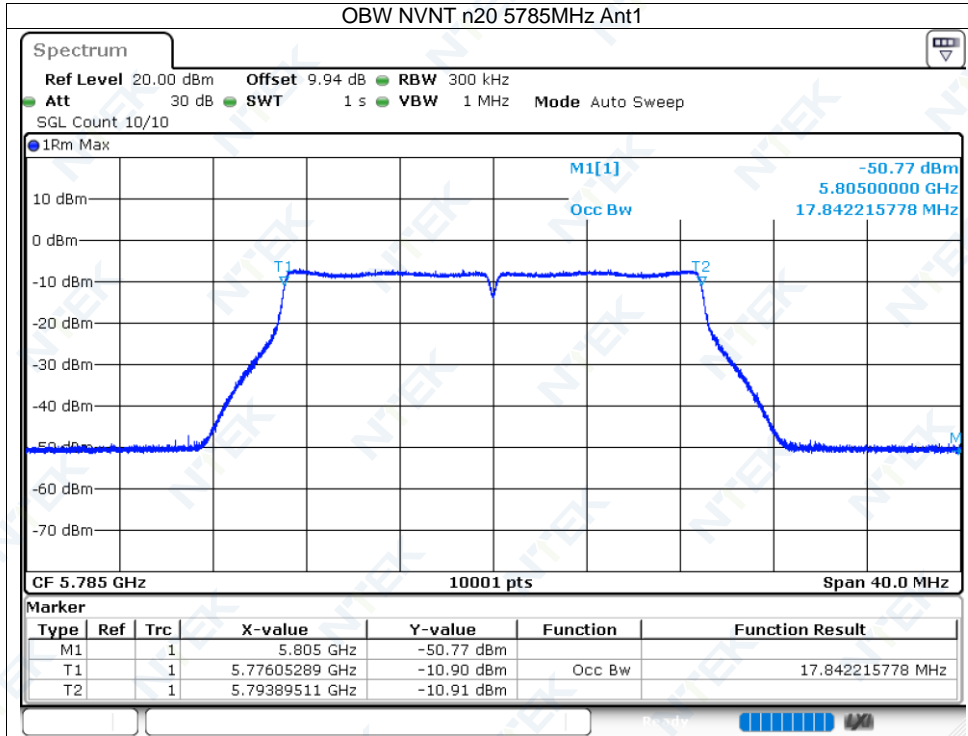


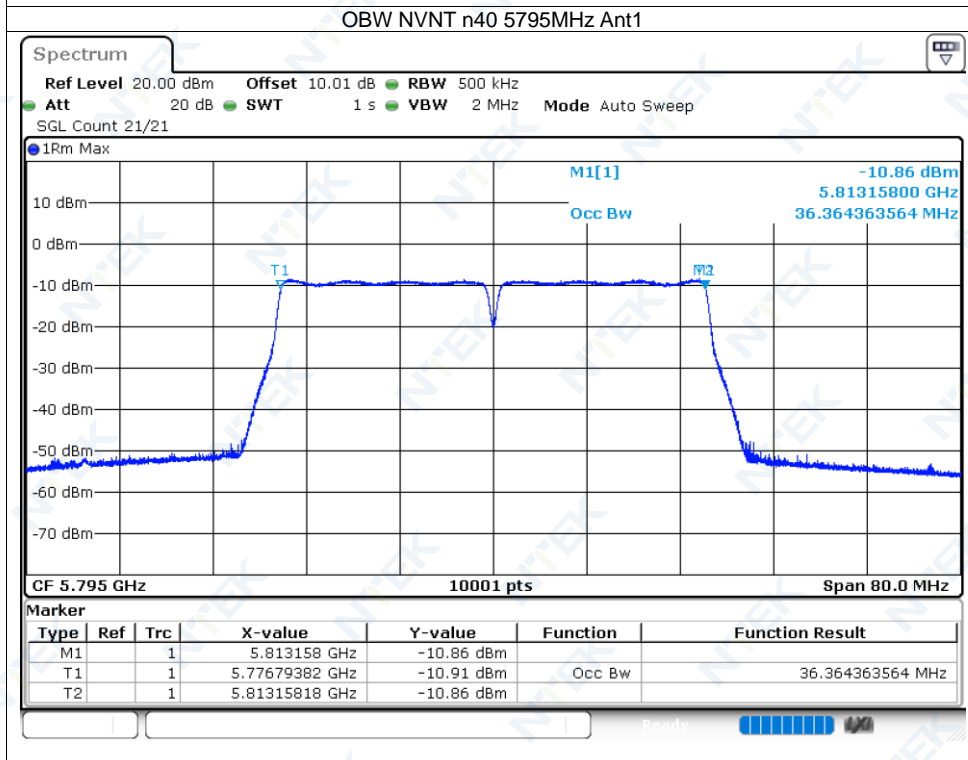
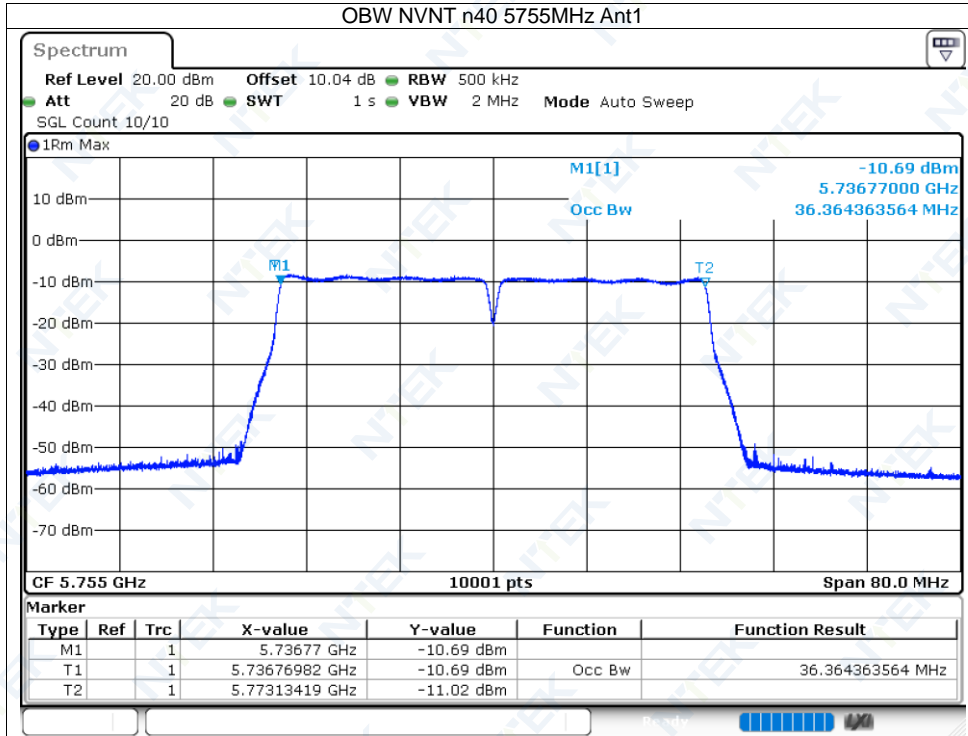


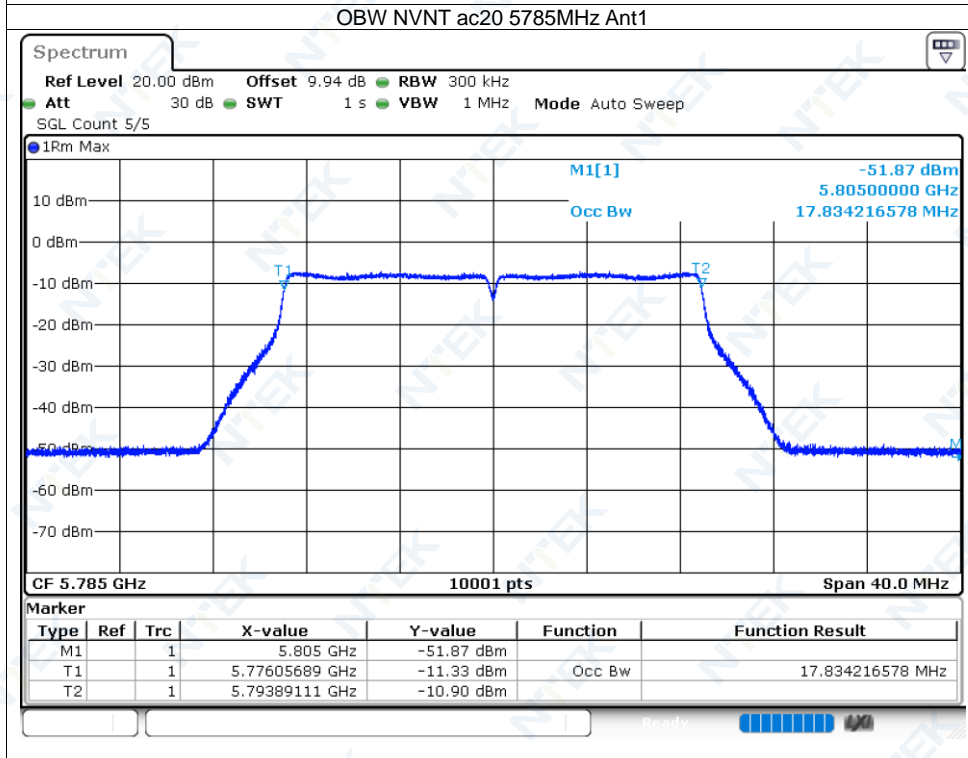
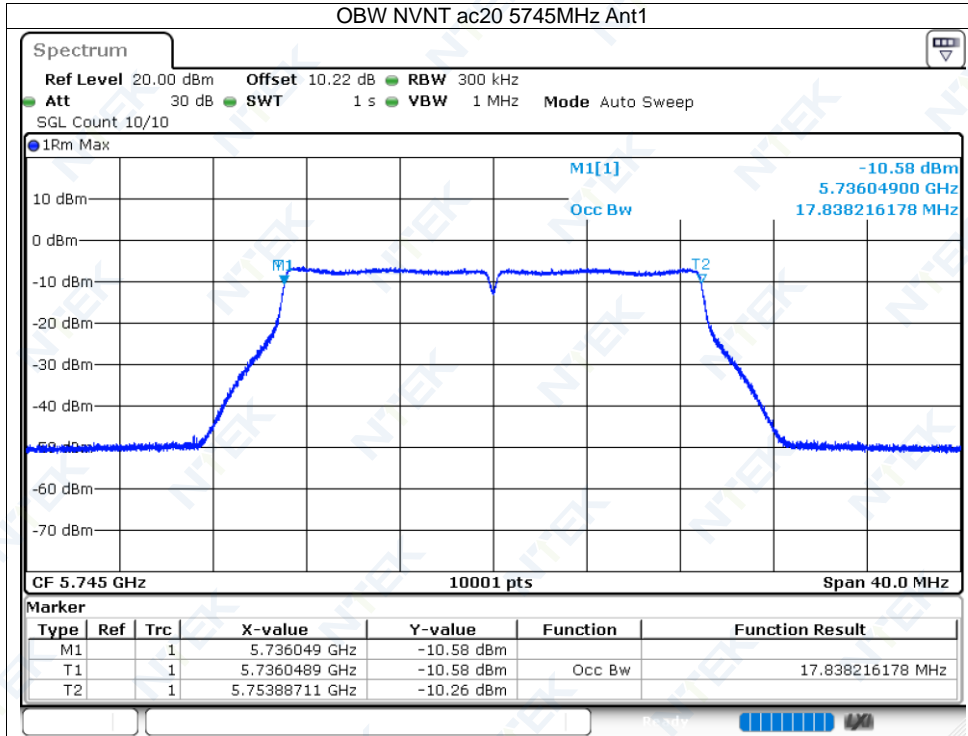


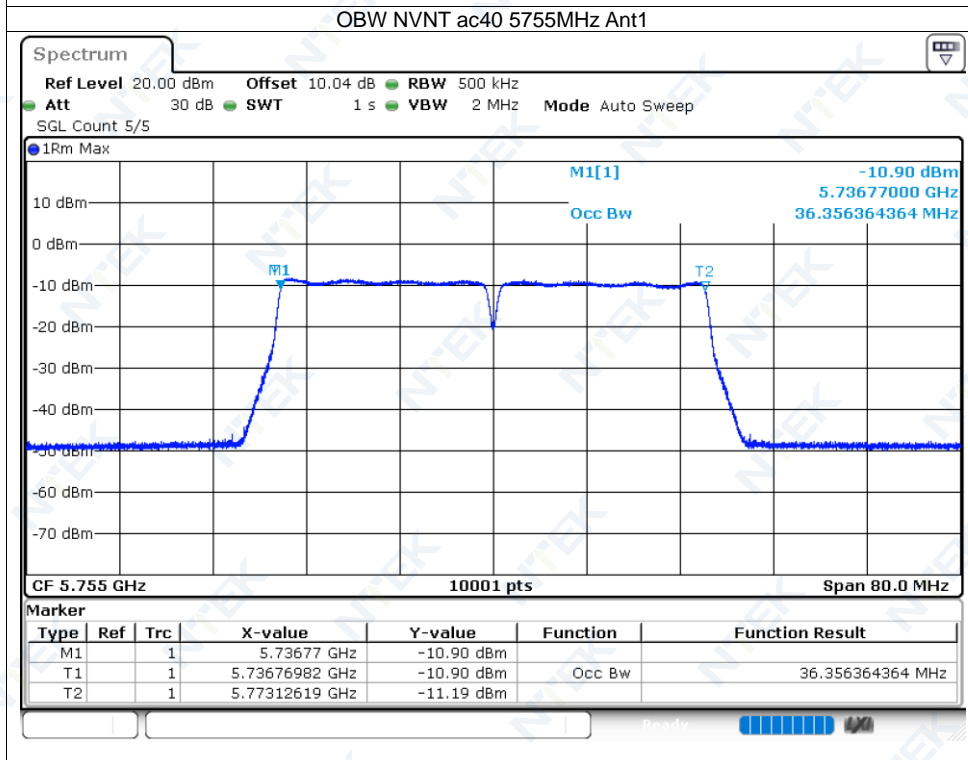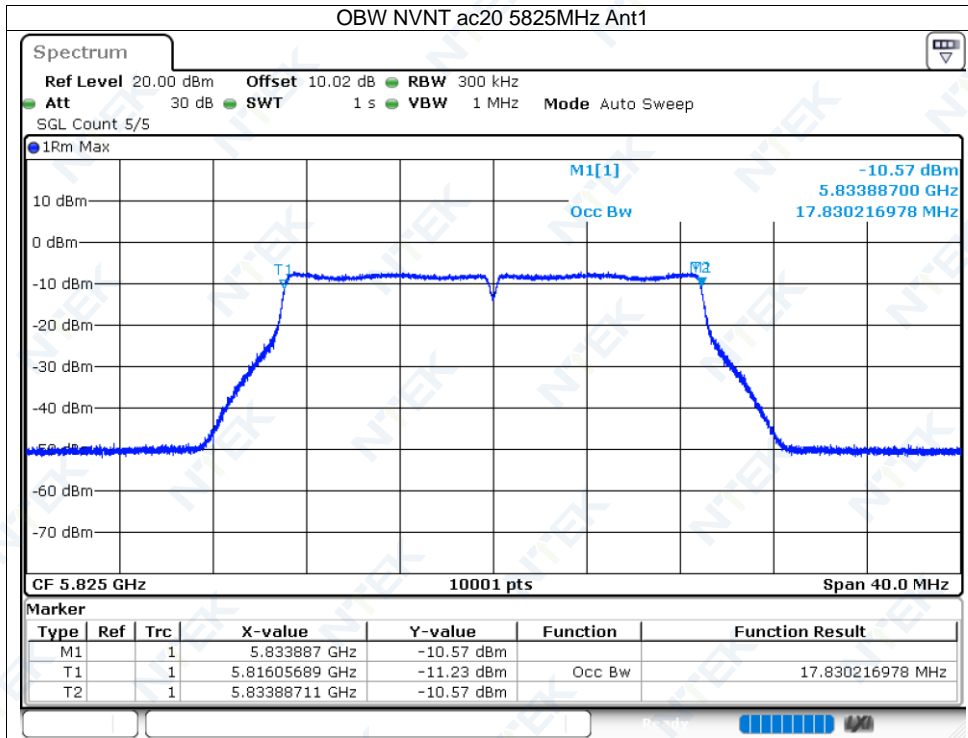

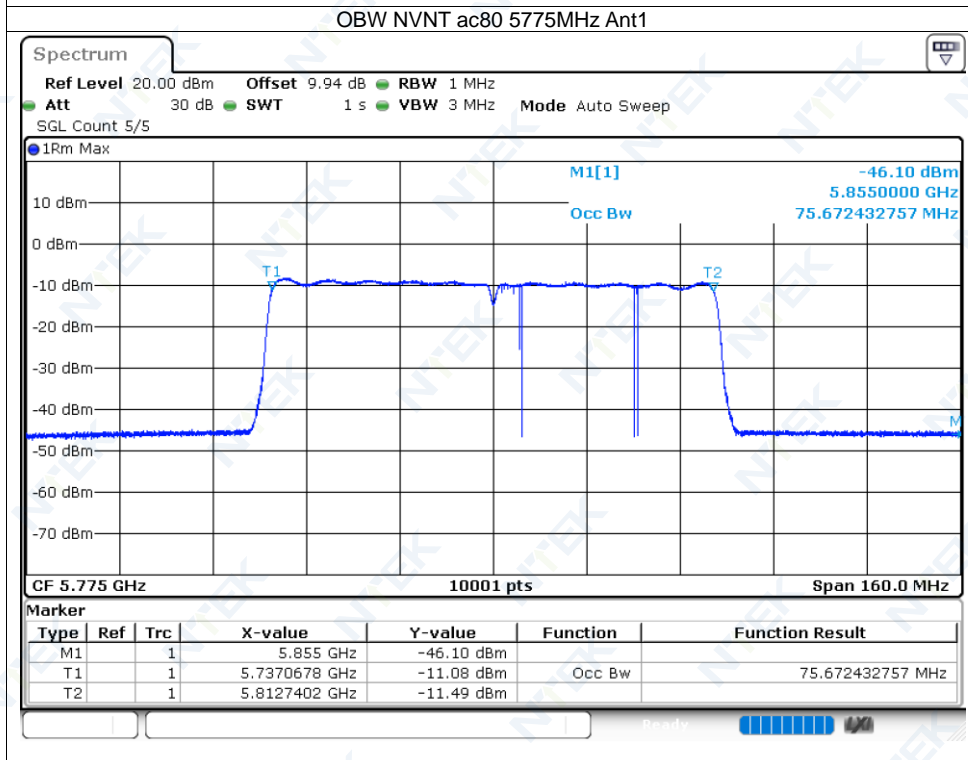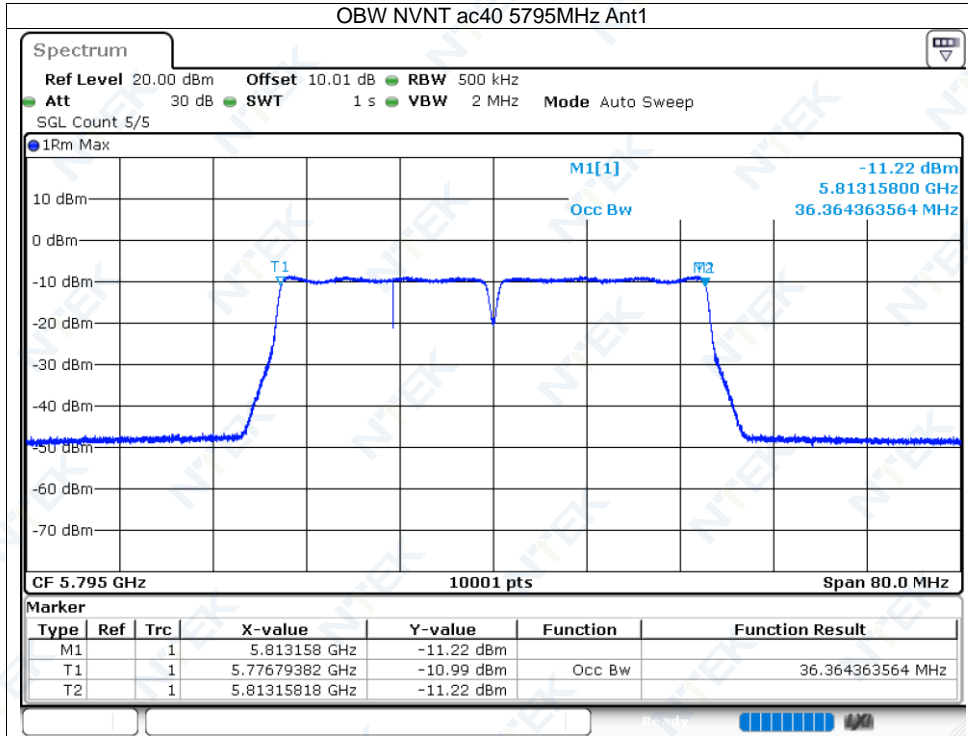

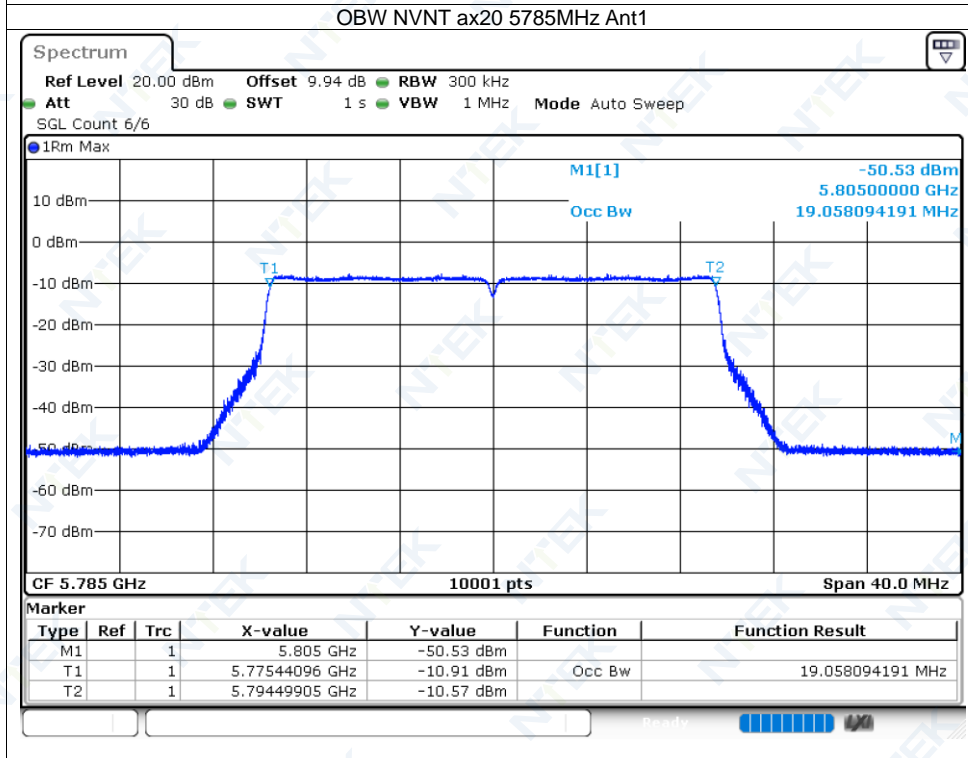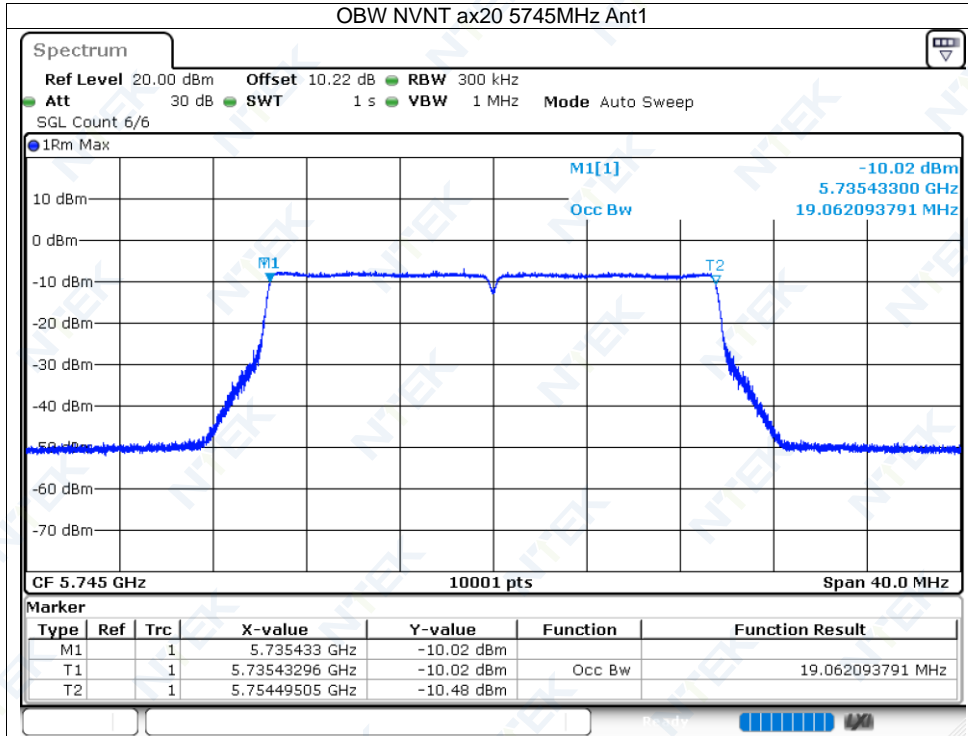

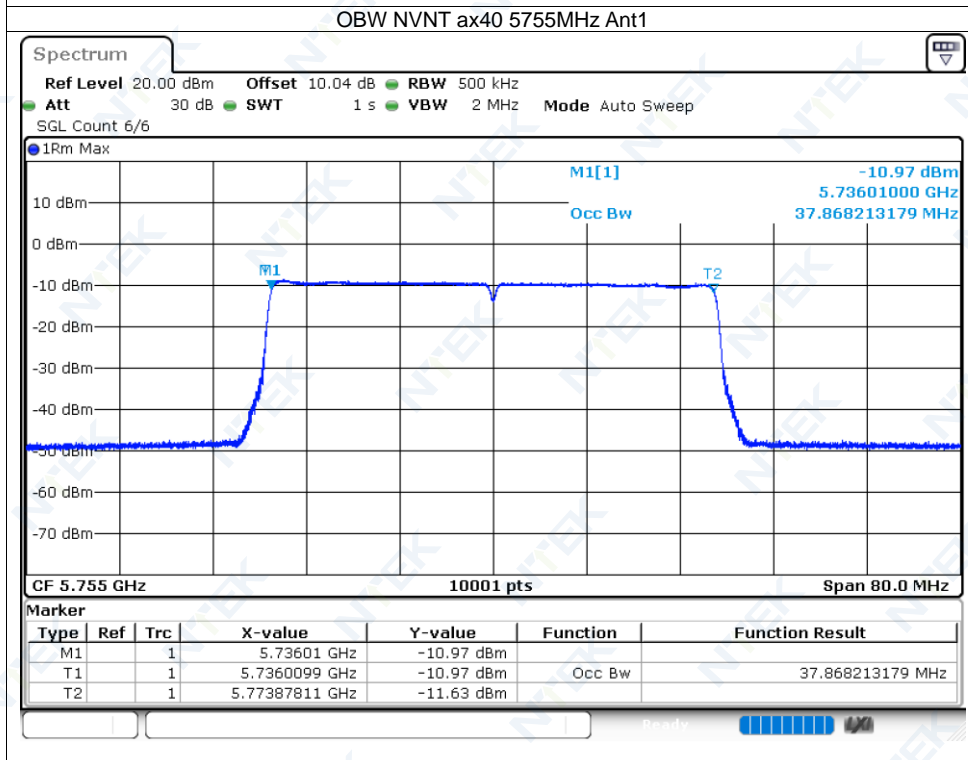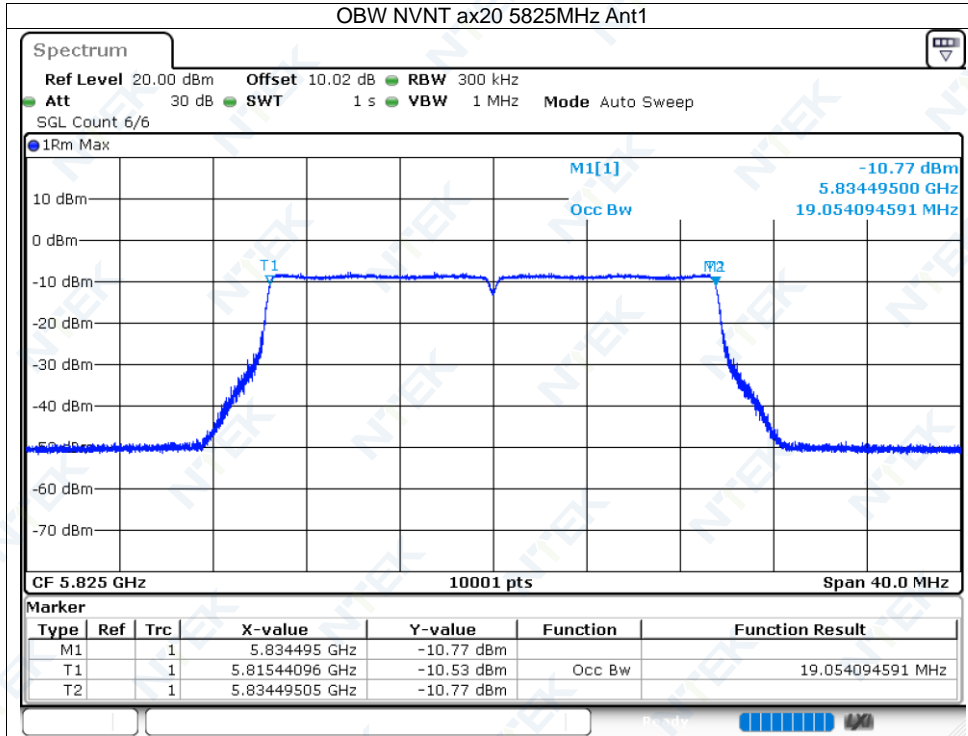

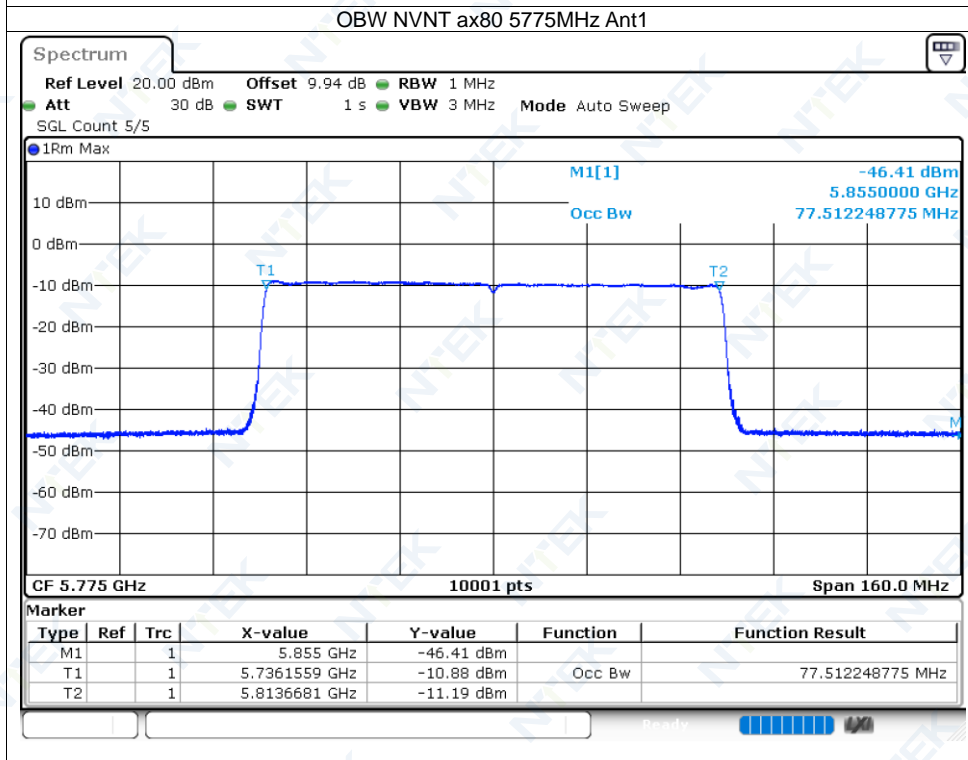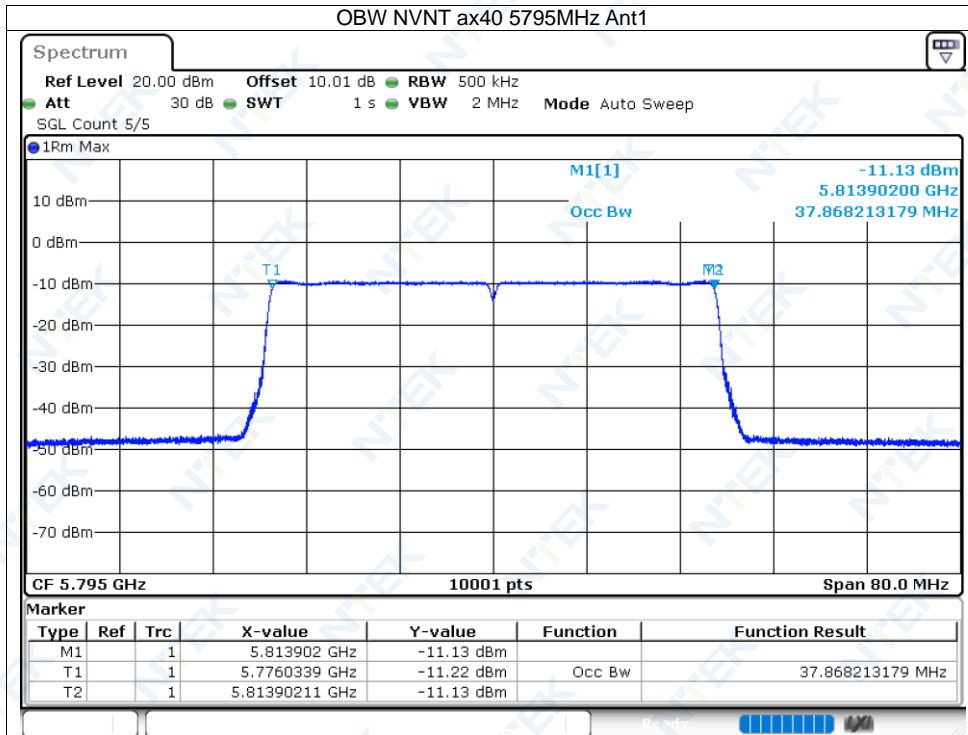

10.5 RF OUTPUT POWER

Antenna	Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
Ant 1	NVNT	802.11a	5745	7.5	23	10.50	13.98	Pass
Ant 1	NVNT	802.11a	5785	7.41	19	10.41	13.98	Pass
Ant 1	NVNT	802.11a	5825	7.25	19	10.25	13.98	Pass
Ant 1	HVLT	802.11a	5745	7.27	71	10.27	13.98	Pass
Ant 1	HVLT	802.11a	5785	7.28	69	10.28	13.98	Pass
Ant 1	HVLT	802.11a	5825	7.13	71	10.13	13.98	Pass
Ant 1	LVHT	802.11a	5745	7.24	71	10.24	13.98	Pass
Ant 1	LVHT	802.11a	5785	7.22	69	10.22	13.98	Pass
Ant 1	LVHT	802.11a	5825	7.06	71	10.06	13.98	Pass
Ant 1	HVHT	802.11a	5745	7.01	71	10.01	13.98	Pass
Ant 1	HVHT	802.11a	5785	7.09	69	10.09	13.98	Pass
Ant 1	HVHT	802.11a	5825	6.94	71	9.94	13.98	Pass
Ant 1	LVLT	802.11a	5745	7	71	10.00	13.98	Pass
Ant 1	LVLT	802.11a	5785	7.06	69	10.06	13.98	Pass
Ant 1	LVLT	802.11a	5825	6.83	71	9.83	13.98	Pass
Ant 1	NVNT	802.11ac20	5745	7.63	27	10.63	13.98	Pass
Ant 1	NVNT	802.11ac20	5785	7.4	20	10.40	13.98	Pass
Ant 1	NVNT	802.11ac20	5825	7.37	27	10.37	13.98	Pass
Ant 1	NVNT	802.11ac40	5755	7.39	20	10.39	13.98	Pass
Ant 1	NVNT	802.11ac40	5795	6.91	39	9.91	13.98	Pass


Ant 1	NVNT	802.11ac80	5775	7.44	30	10.44	13.98	Pass
Ant 1	NVNT	802.11ax20	5745	7.2	31	10.20	13.98	Pass
Ant 1	NVNT	802.11ax20	5785	7.2	26	10.20	13.98	Pass
Ant 1	NVNT	802.11ax20	5825	7.3	32	10.30	13.98	Pass
Ant 1	NVNT	802.11ax40	5755	7.54	20	10.54	13.98	Pass
Ant 1	NVNT	802.11ax40	5795	7.05	18	10.05	13.98	Pass
Ant 1	NVNT	802.11ax80	5775	7.41	36	10.41	13.98	Pass
Ant 1	NVNT	802.11n(HT20)	5745	7.53	20	10.53	13.98	Pass
Ant 1	NVNT	802.11n(HT20)	5785	7.33	21	10.33	13.98	Pass
Ant 1	NVNT	802.11n(HT20)	5825	7.37	21	10.37	13.98	Pass
Ant 1	NVNT	802.11n(HT40)	5755	7.47	39	10.47	13.98	Pass
Ant 1	NVNT	802.11n(HT40)	5795	6.77	22	9.77	13.98	Pass
Ant 1	HVLT	802.11ac20	5745	7.5	73	10.50	13.98	Pass
Ant 1	HVLT	802.11ac20	5785	7.25	75	10.25	13.98	Pass
Ant 1	HVLT	802.11ac20	5825	7.21	74	10.21	13.98	Pass
Ant 1	HVLT	802.11ac40	5755	7.23	145	10.23	13.98	Pass
Ant 1	HVLT	802.11ac40	5795	6.76	144	9.76	13.98	Pass
Ant 1	HVLT	802.11ac80	5775	7.29	276	10.29	13.98	Pass
Ant 1	NVNT	802.11ax20	5745	7.14	45	10.14	13.98	Pass
Ant 1	NVNT	802.11ax20	5785	6.98	46	9.98	13.98	Pass
Ant 1	NVNT	802.11ax20	5825	7.19	45	10.19	13.98	Pass
Ant 1	NVNT	802.11ax40	5755	7.4	90	10.40	13.98	Pass

Ant 1	NVNT	802.11ax40	5795	6.94	91	9.94	13.98	Pass
Ant 1	NVNT	802.11ax80	5775	7.18	183	10.18	13.98	Pass
Ant 1	HVLT	802.11n(HT20)	5745	7.38	75	10.38	13.98	Pass
Ant 1	HVLT	802.11n(HT20)	5785	7.24	75	10.24	13.98	Pass
Ant 1	HVLT	802.11n(HT20)	5825	7.31	75	10.31	13.98	Pass
Ant 1	HVLT	802.11n(HT40)	5755	7.45	146	10.45	13.98	Pass
Ant 1	HVLT	802.11n(HT40)	5795	6.66	145	9.66	13.98	Pass
Ant 1	LVHT	802.11ac20	5745	7.37	73	10.37	13.98	Pass
Ant 1	LVHT	802.11ac20	5785	7.1	75	10.10	13.98	Pass
Ant 1	LVHT	802.11ac20	5825	7.05	74	10.05	13.98	Pass
Ant 1	LVHT	802.11ac40	5755	7.07	145	10.07	13.98	Pass
Ant 1	LVHT	802.11ac40	5795	6.61	144	9.61	13.98	Pass
Ant 1	LVHT	802.11ac80	5775	7.14	276	10.14	13.98	Pass
Ant 1	NVNT	802.11ax20	5745	7.11	45	10.11	13.98	Pass
Ant 1	NVNT	802.11ax20	5785	6.91	46	9.91	13.98	Pass
Ant 1	NVNT	802.11ax20	5825	7.02	45	10.02	13.98	Pass
Ant 1	NVNT	802.11ax40	5755	7.16	90	10.16	13.98	Pass
Ant 1	NVNT	802.11ax40	5795	6.92	91	9.92	13.98	Pass
Ant 1	NVNT	802.11ax80	5775	7.09	183	10.09	13.98	Pass
Ant 1	LVHT	802.11n(HT20)	5745	7.23	75	10.23	13.98	Pass
Ant 1	LVHT	802.11n(HT20)	5785	7.15	75	10.15	13.98	Pass


Ant 1	LVHT	802.11n(HT20)	5825	7.25	75	10.25	13.98	Pass
Ant 1	LVHT	802.11n(HT40)	5755	7.43	146	10.43	13.98	Pass
Ant 1	LVHT	802.11n(HT40)	5795	6.55	145	9.55	13.98	Pass
Ant 1	HVHT	802.11ac20	5745	7.24	73	10.24	13.98	Pass
Ant 1	HVHT	802.11ac20	5785	6.95	75	9.95	13.98	Pass
Ant 1	HVHT	802.11ac20	5825	6.89	74	9.89	13.98	Pass
Ant 1	HVHT	802.11ac40	5755	6.91	145	9.91	13.98	Pass
Ant 1	HVHT	802.11ac40	5795	6.46	144	9.46	13.98	Pass
Ant 1	HVHT	802.11ac80	5775	6.99	276	9.99	13.98	Pass
Ant 1	NVNT	802.11ax20	5745	6.99	45	9.99	13.98	Pass
Ant 1	NVNT	802.11ax20	5785	6.84	46	9.84	13.98	Pass
Ant 1	NVNT	802.11ax20	5825	6.84	45	9.84	13.98	Pass
Ant 1	NVNT	802.11ax40	5755	7.03	90	10.03	13.98	Pass
Ant 1	NVNT	802.11ax40	5795	6.85	91	9.85	13.98	Pass
Ant 1	NVNT	802.11ax80	5775	6.92	183	9.92	13.98	Pass
Ant 1	HVHT	802.11n(HT20)	5745	7.08	75	10.08	13.98	Pass
Ant 1	HVHT	802.11n(HT20)	5785	7.06	75	10.06	13.98	Pass
Ant 1	HVHT	802.11n(HT20)	5825	7.19	75	10.19	13.98	Pass
Ant 1	HVHT	802.11n(HT40)	5755	7.41	146	10.41	13.98	Pass
Ant 1	HVHT	802.11n(HT40)	5795	6.44	145	9.44	13.98	Pass
Ant 1	LVL T	802.11ac20	5745	7.11	73	10.11	13.98	Pass



Ant 1	LVLT	802.11ac20	5785	6.8	75	9.80	13.98	Pass
Ant 1	LVLT	802.11ac20	5825	6.73	74	9.73	13.98	Pass
Ant 1	LVLT	802.11ac40	5755	6.75	145	9.75	13.98	Pass
Ant 1	LVLT	802.11ac40	5795	6.31	144	9.31	13.98	Pass
Ant 1	LVLT	802.11ac80	5775	6.84	276	9.84	13.98	Pass
Ant 1	NVNT	802.11ax20	5745	6.87	45	9.87	13.98	Pass
Ant 1	NVNT	802.11ax20	5785	6.77	46	9.77	13.98	Pass
Ant 1	NVNT	802.11ax20	5825	6.66	45	9.66	13.98	Pass
Ant 1	NVNT	802.11ax40	5755	6.9	90	9.90	13.98	Pass
Ant 1	NVNT	802.11ax40	5795	6.78	91	9.78	13.98	Pass
Ant 1	NVNT	802.11ax80	5775	6.75	183	9.75	13.98	Pass
Ant 1	LVLT	802.11n(HT20)	5745	6.93	75	9.93	13.98	Pass
Ant 1	LVLT	802.11n(HT20)	5785	6.97	75	9.97	13.98	Pass
Ant 1	LVLT	802.11n(HT20)	5825	7.13	75	10.13	13.98	Pass
Ant 1	LVLT	802.11n(HT40)	5755	7.39	146	10.39	13.98	Pass
Ant 1	LVLT	802.11n(HT40)	5795	6.33	145	9.33	13.98	Pass



Test Graphs
Power NVNT a 5745MHz Ant1


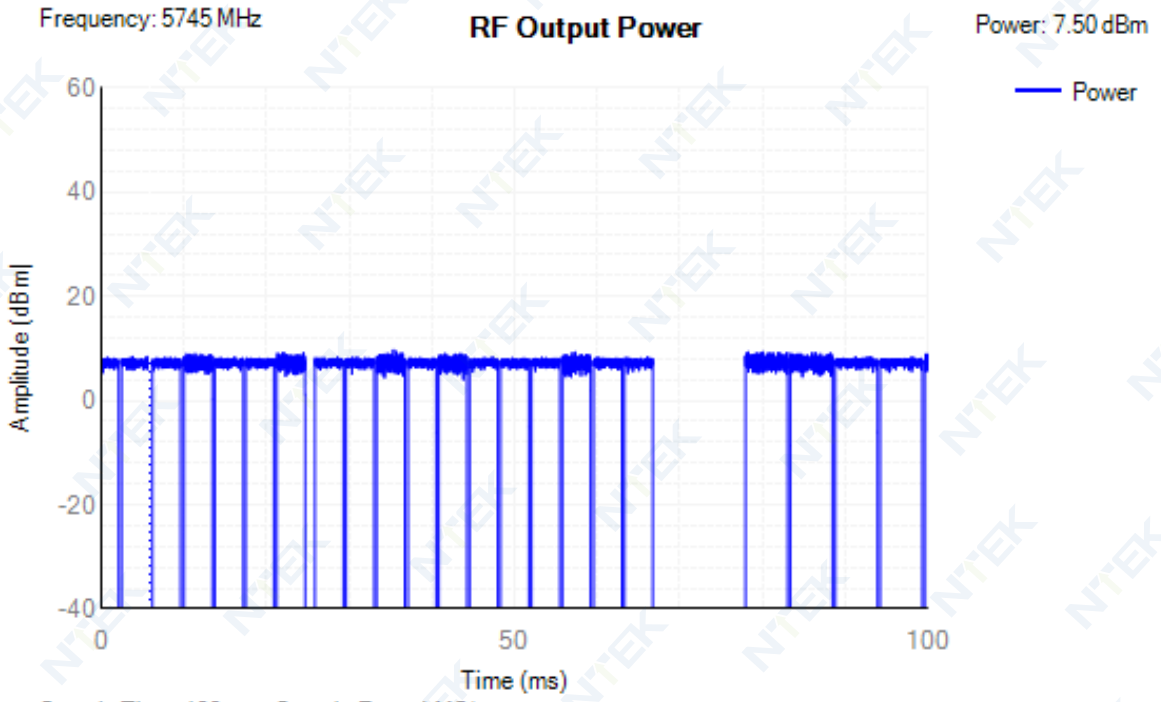




Power NVNT a 5785MHz Ant1


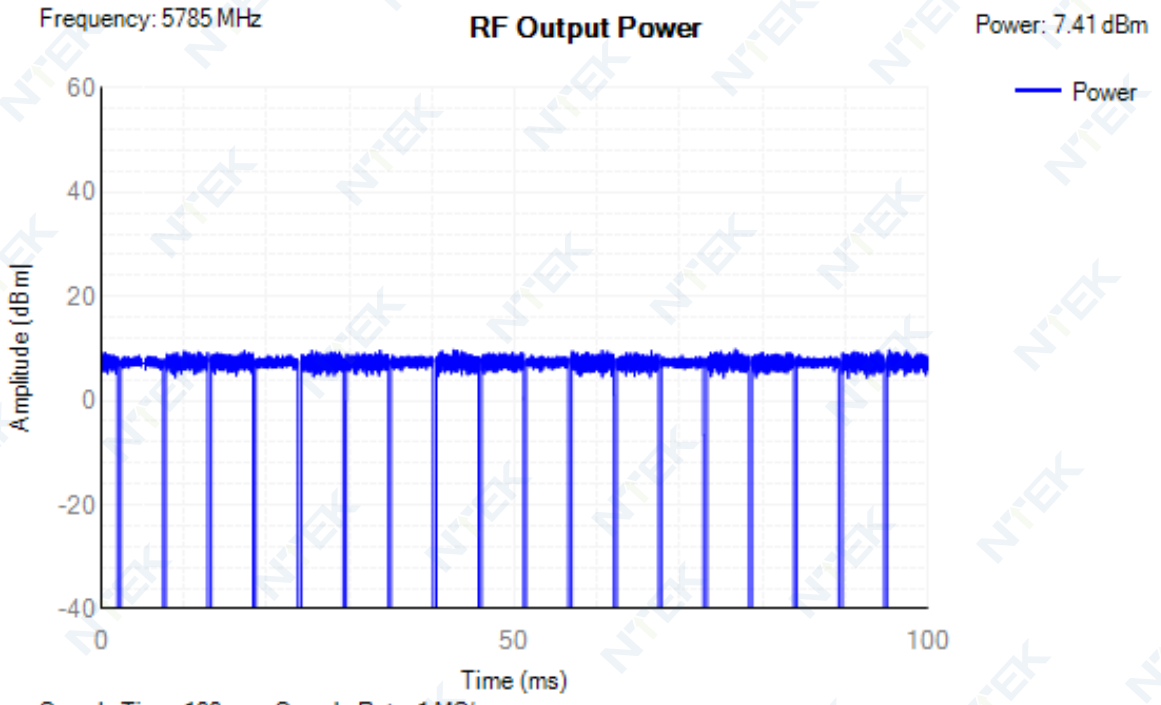


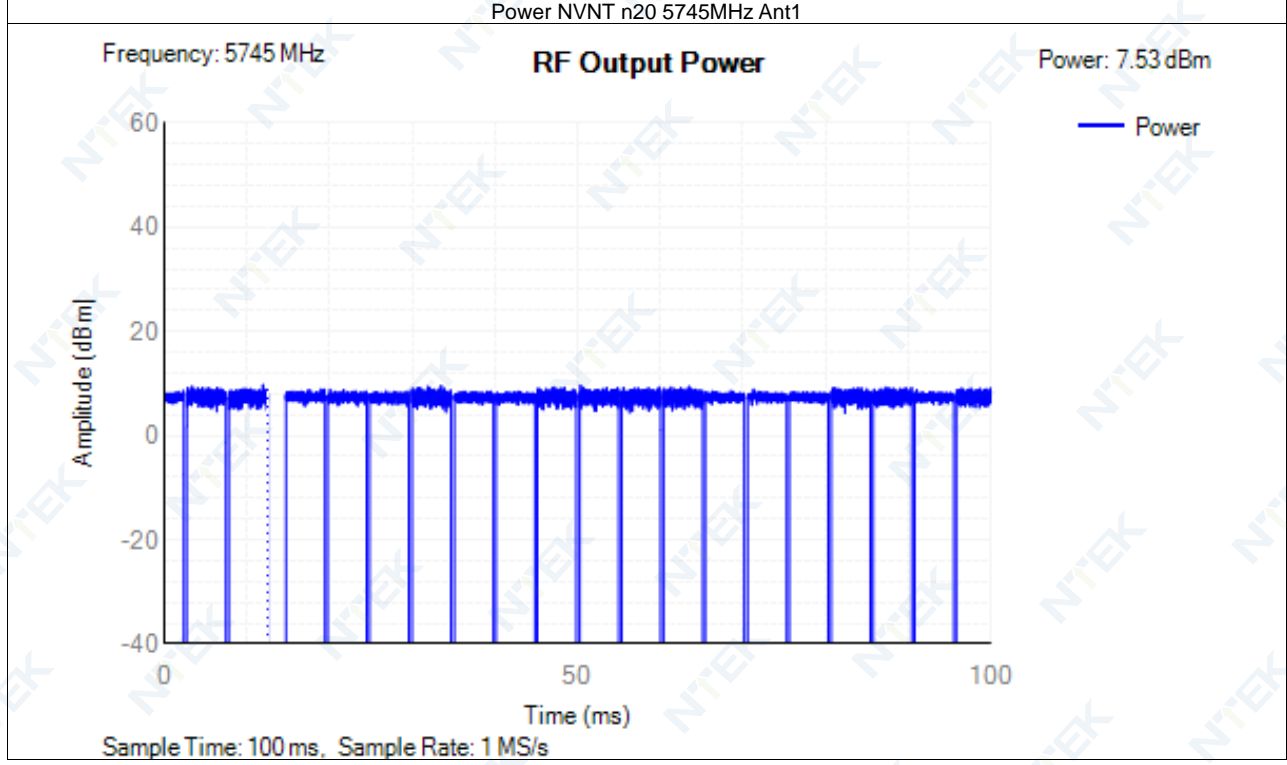
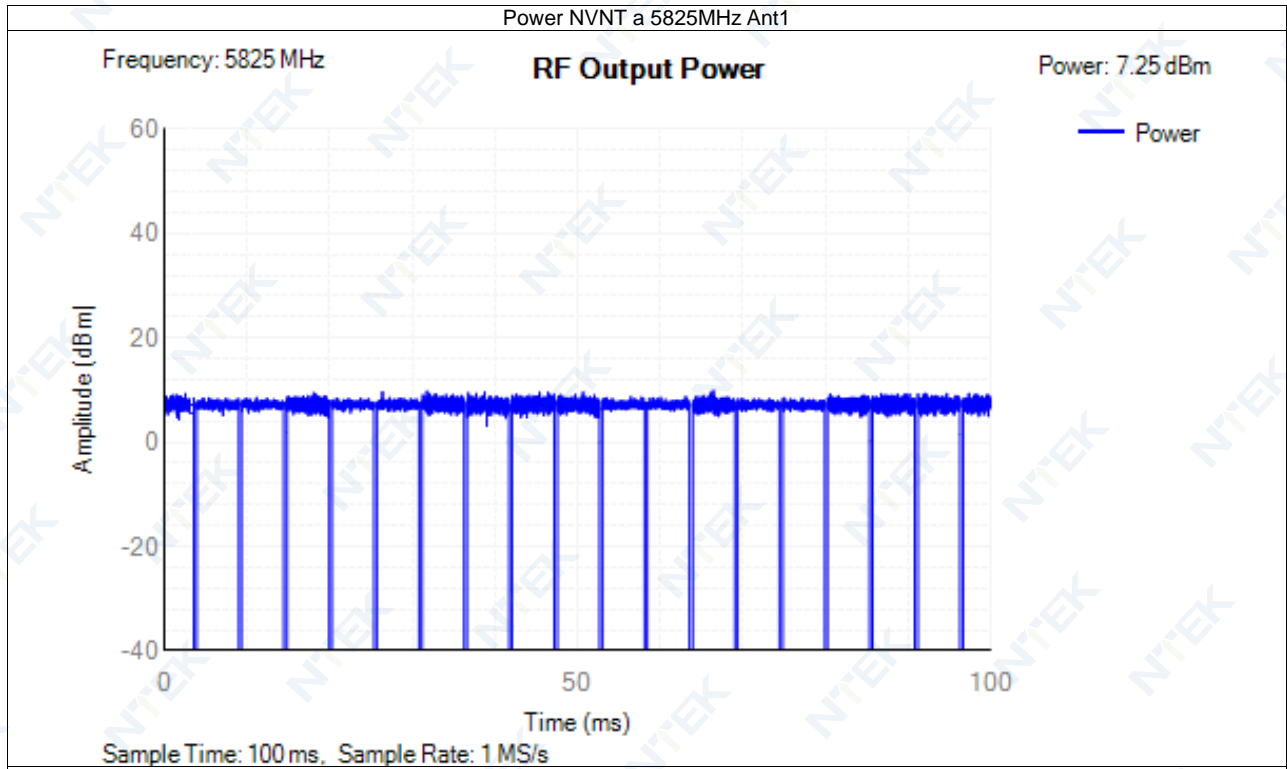


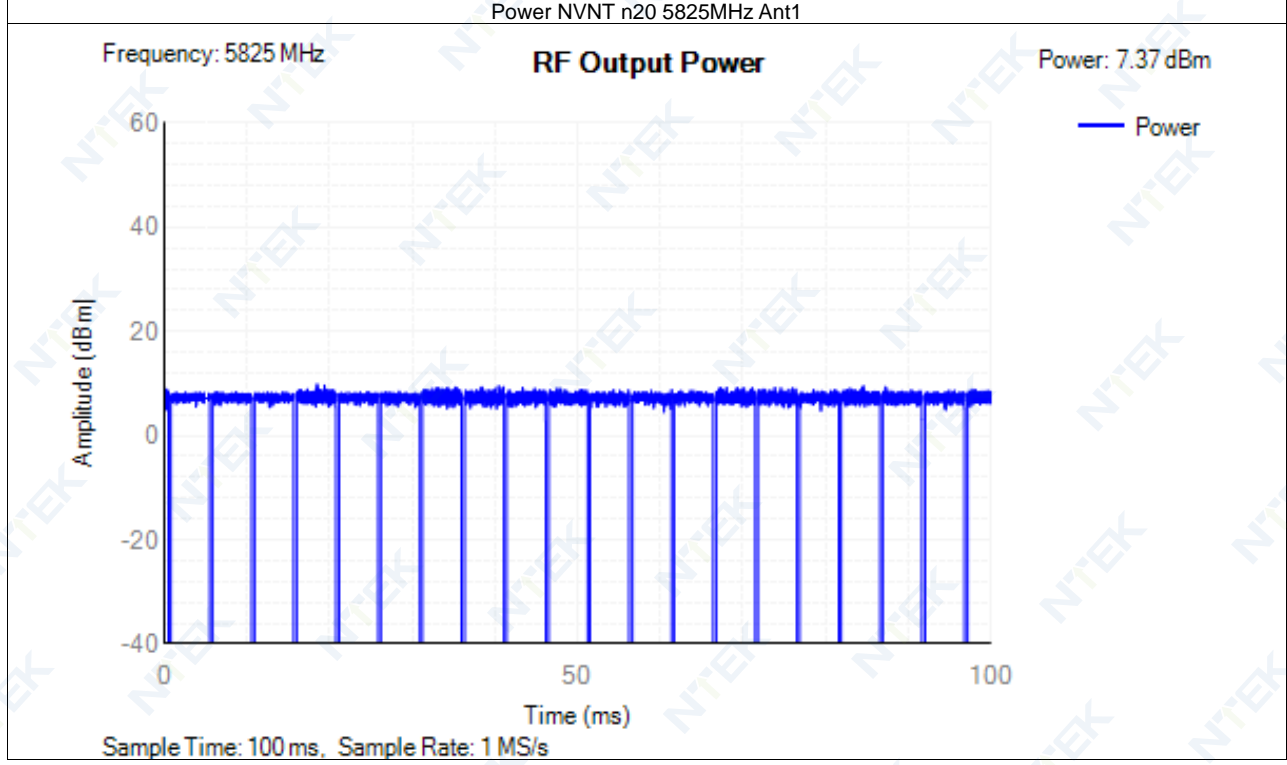
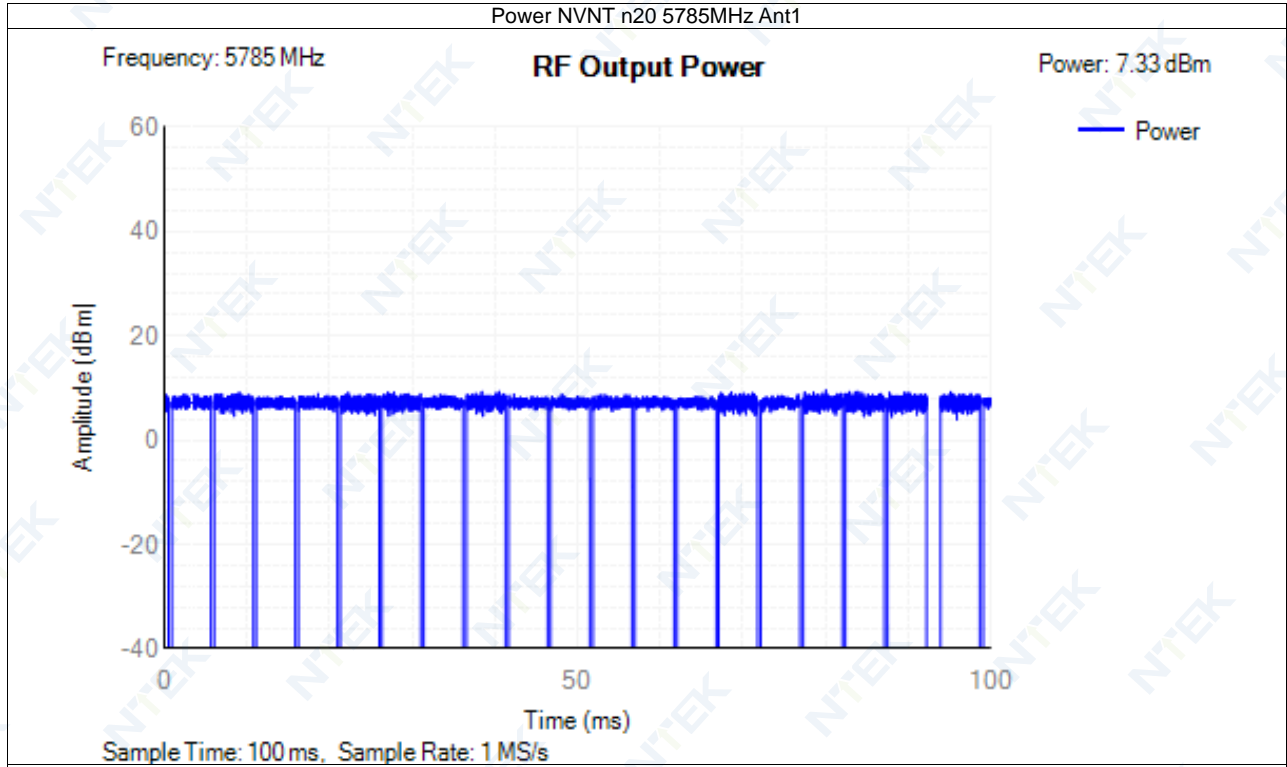


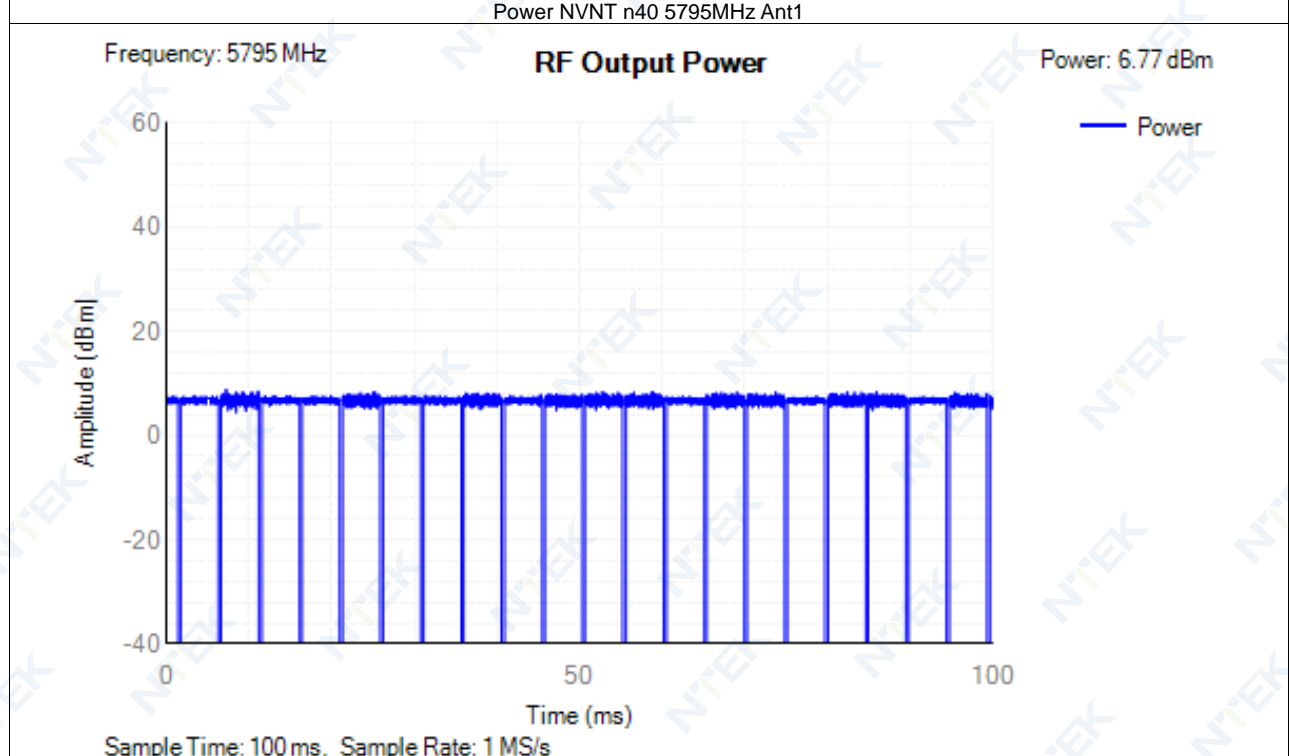
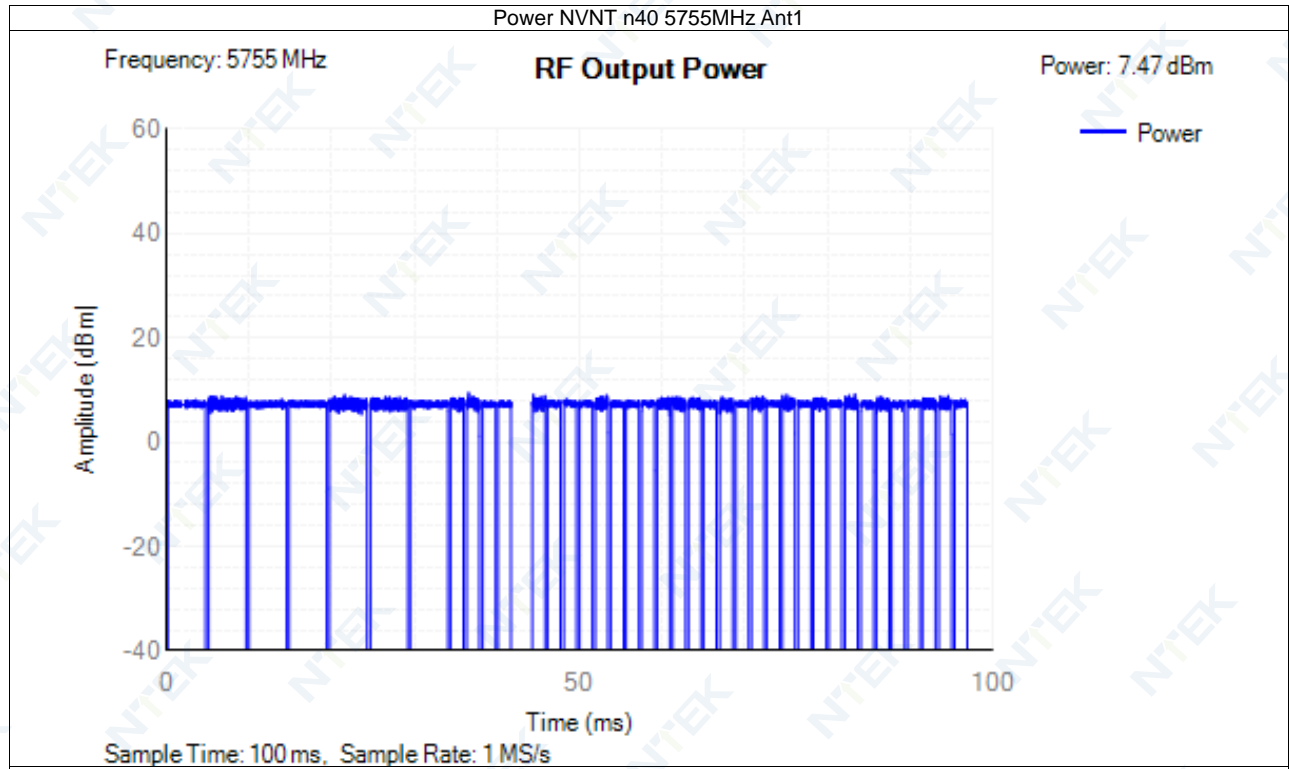


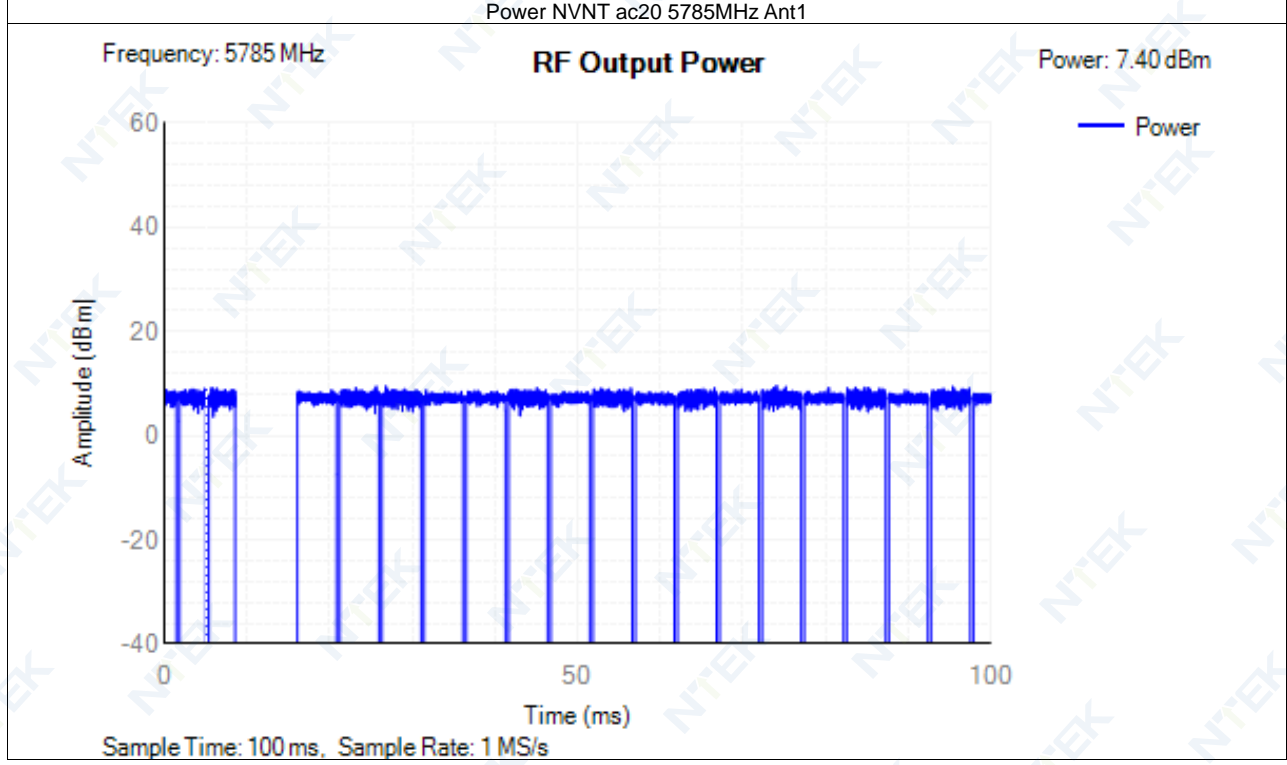
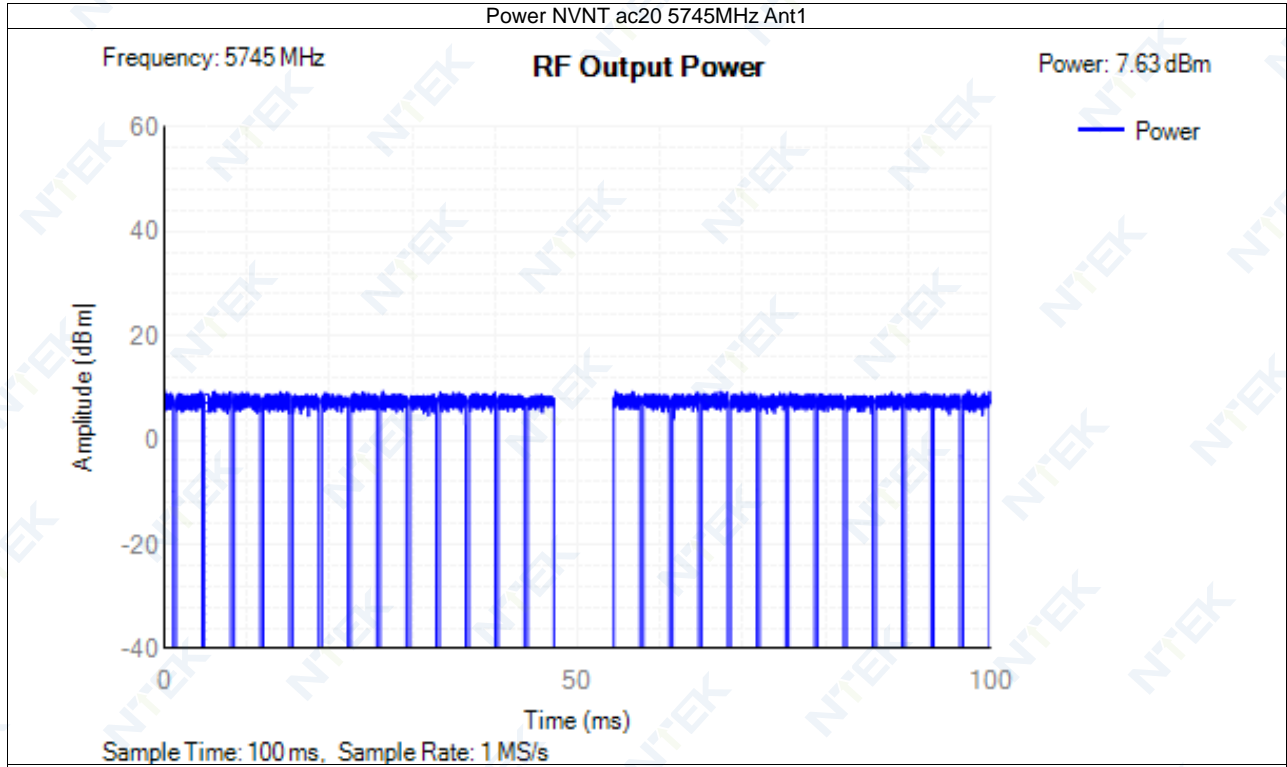


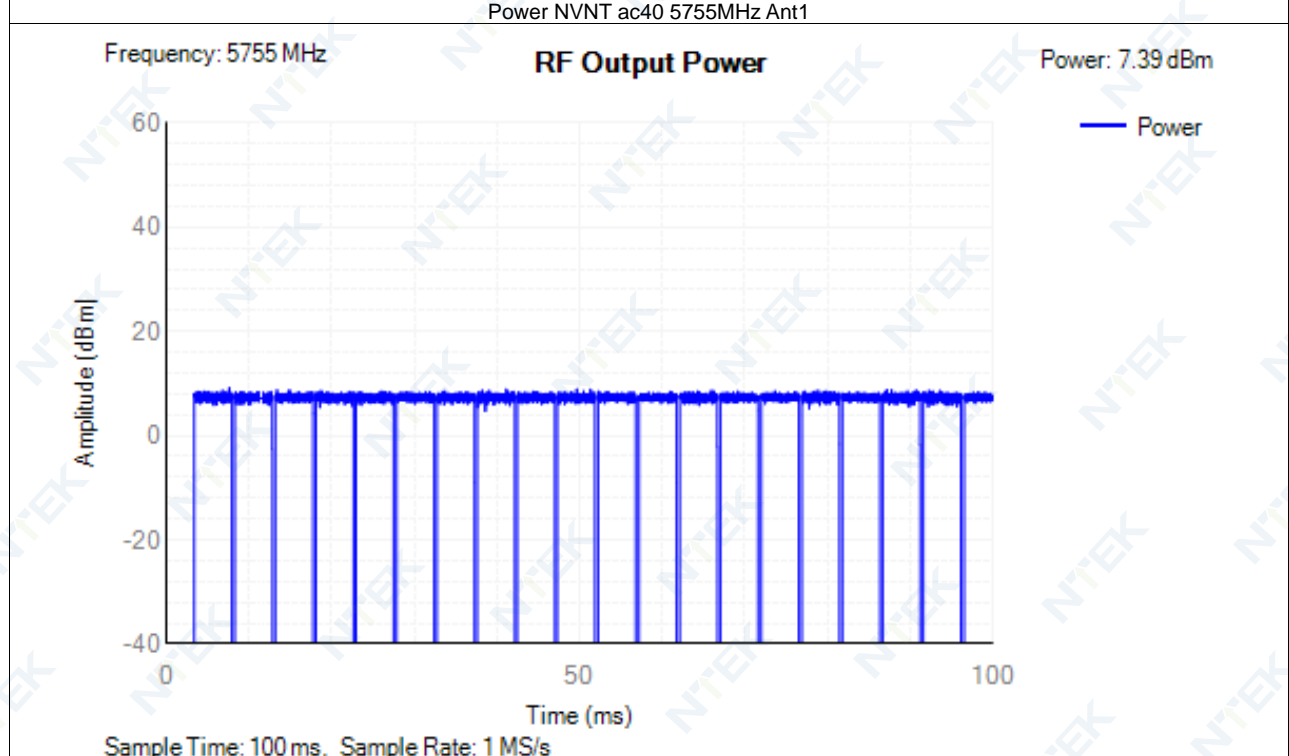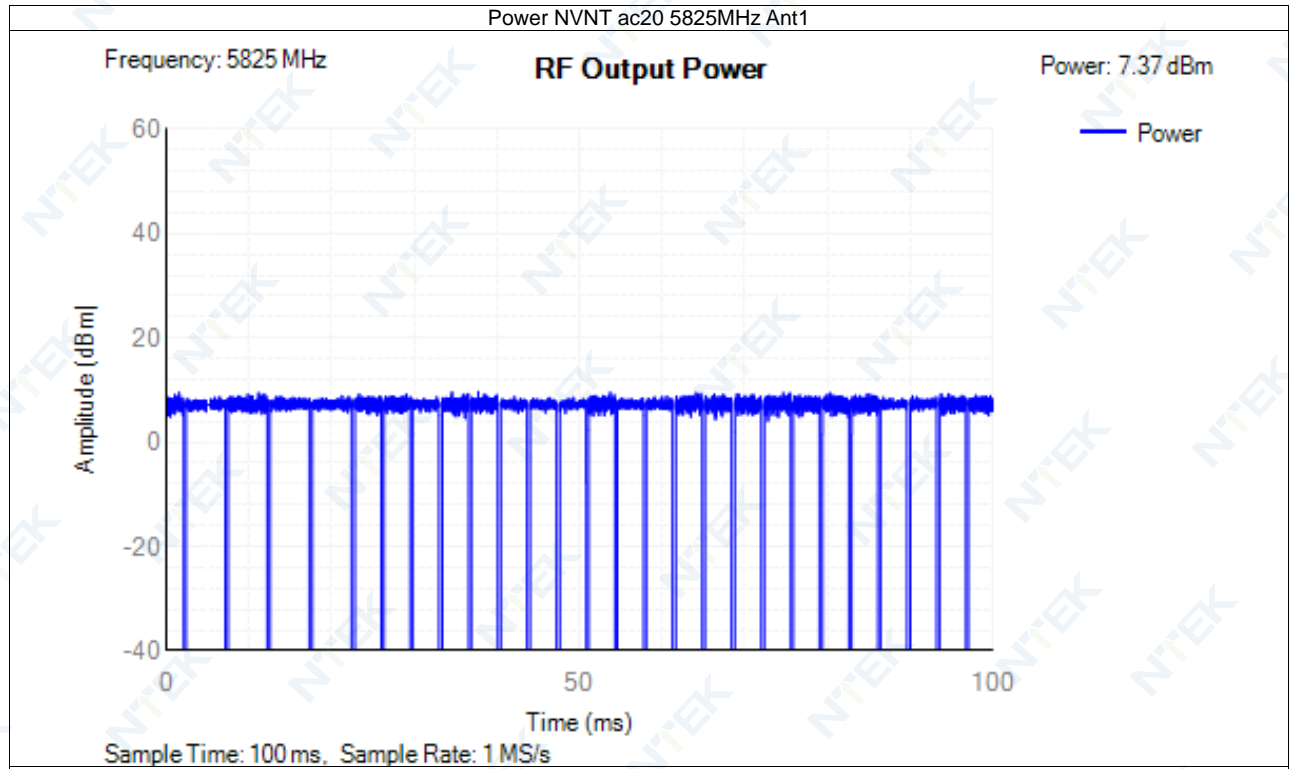

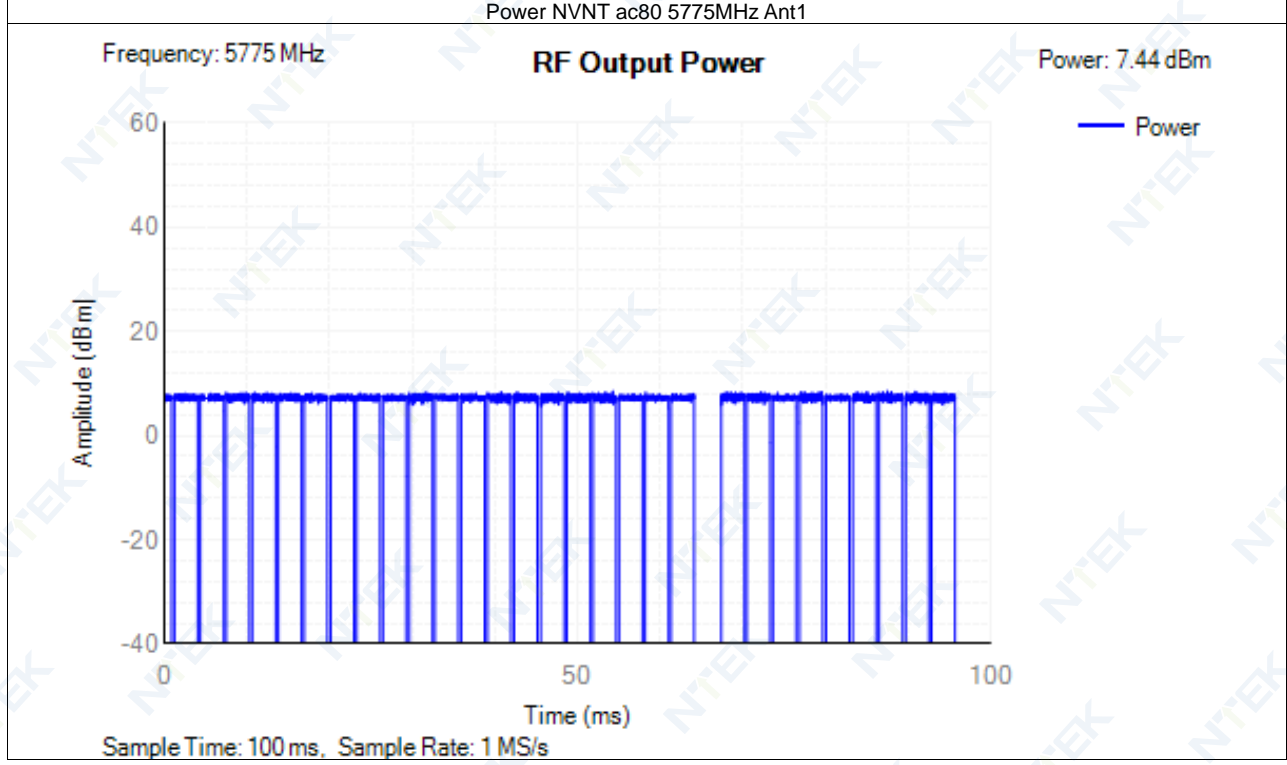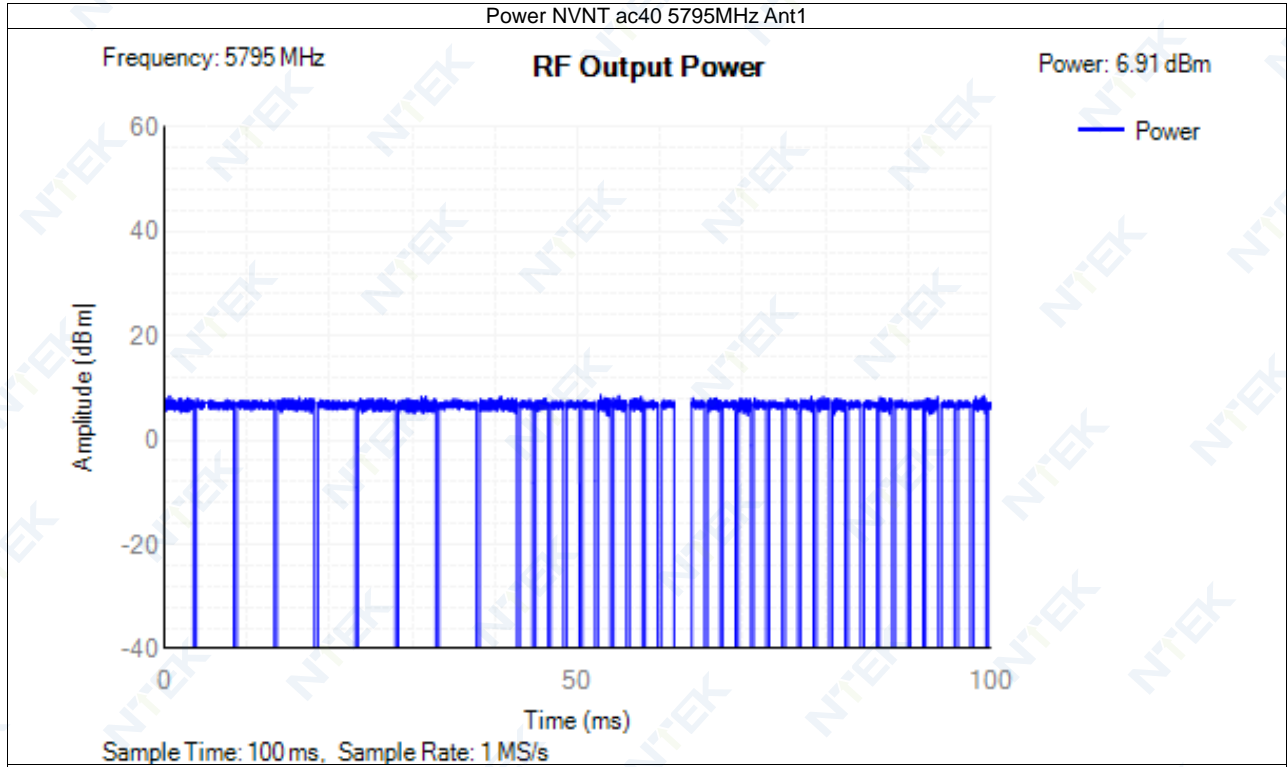

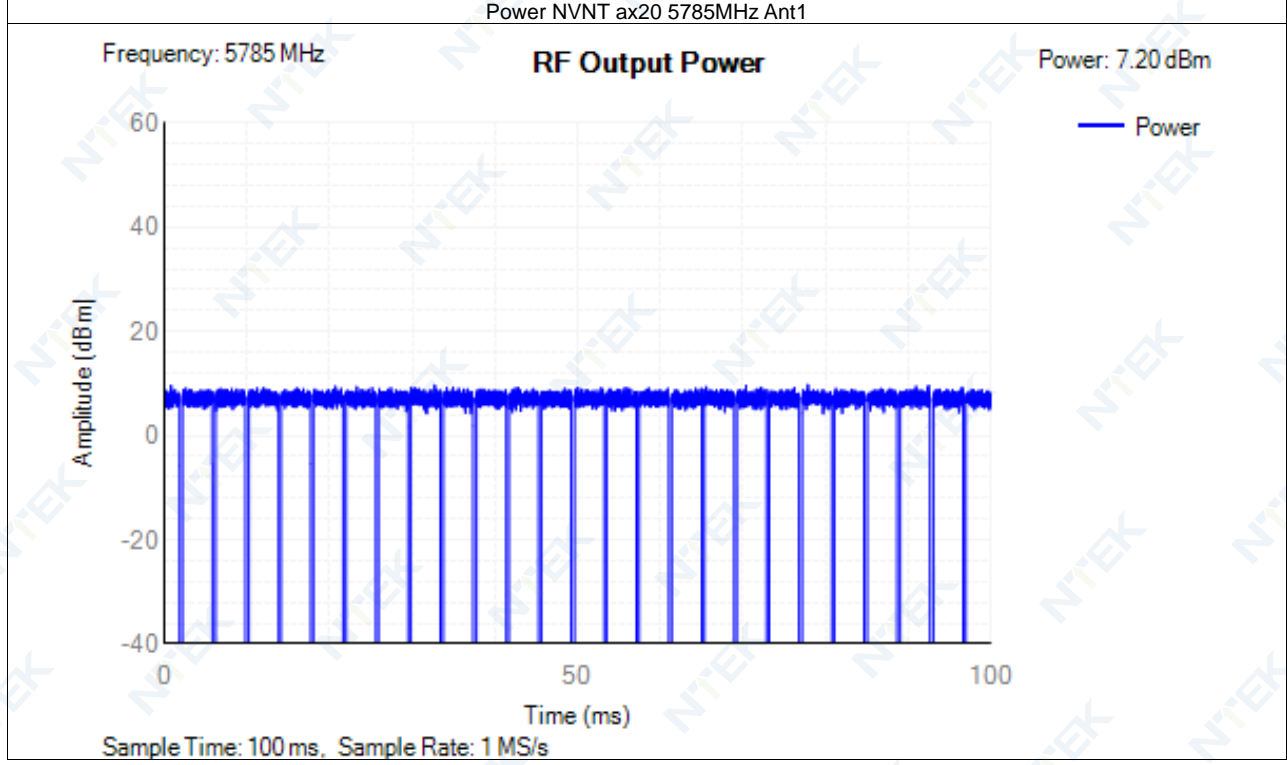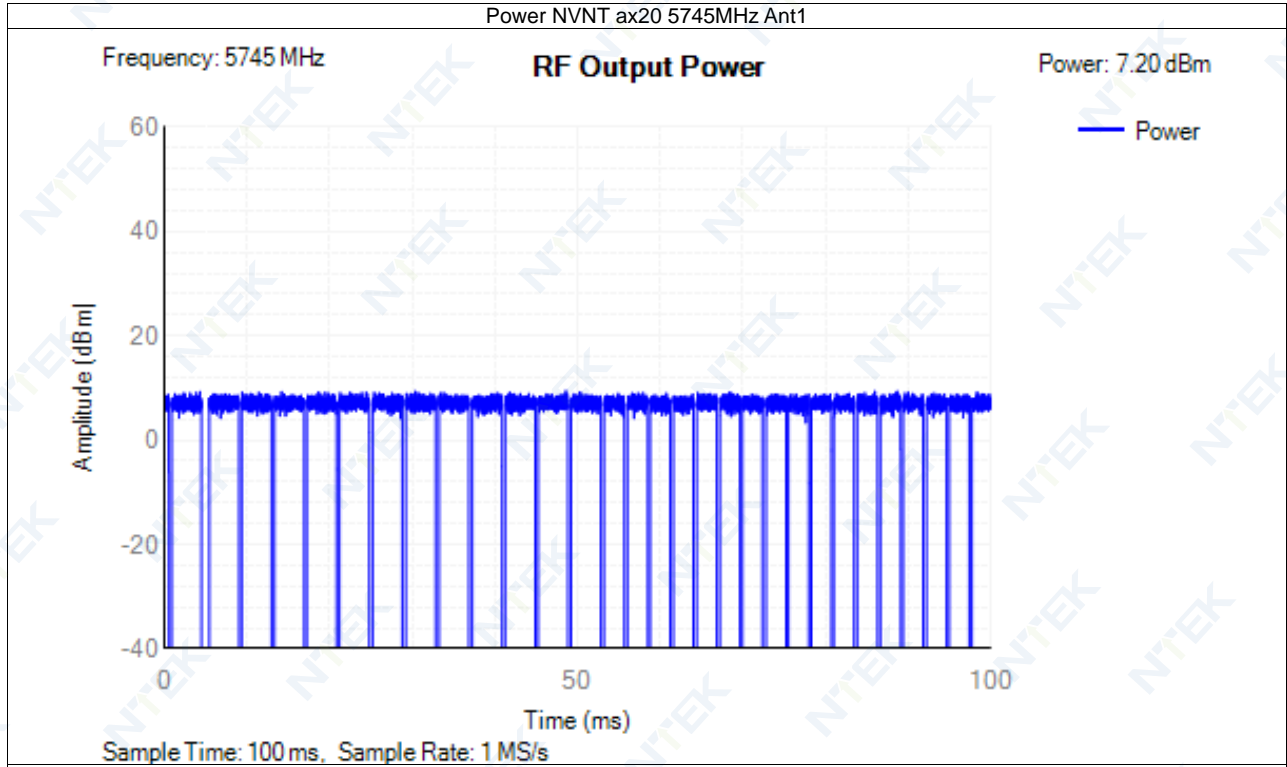


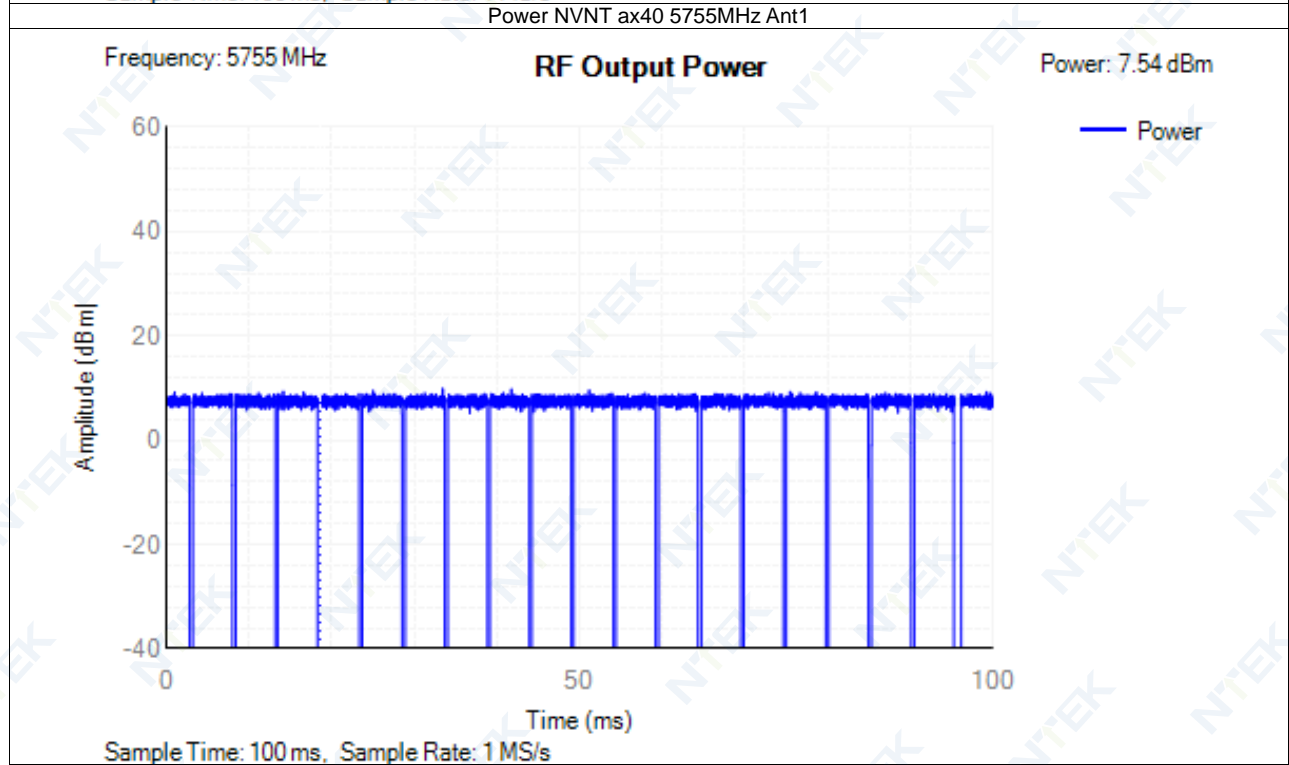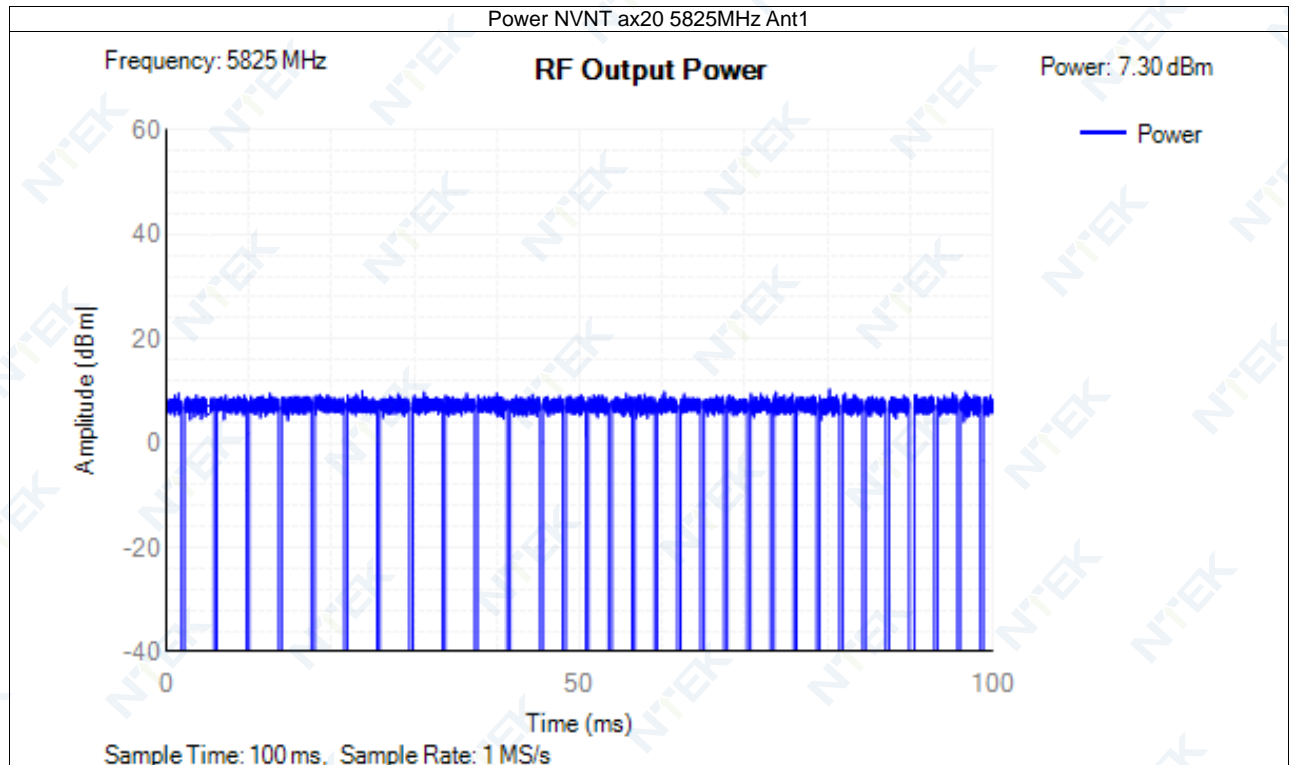

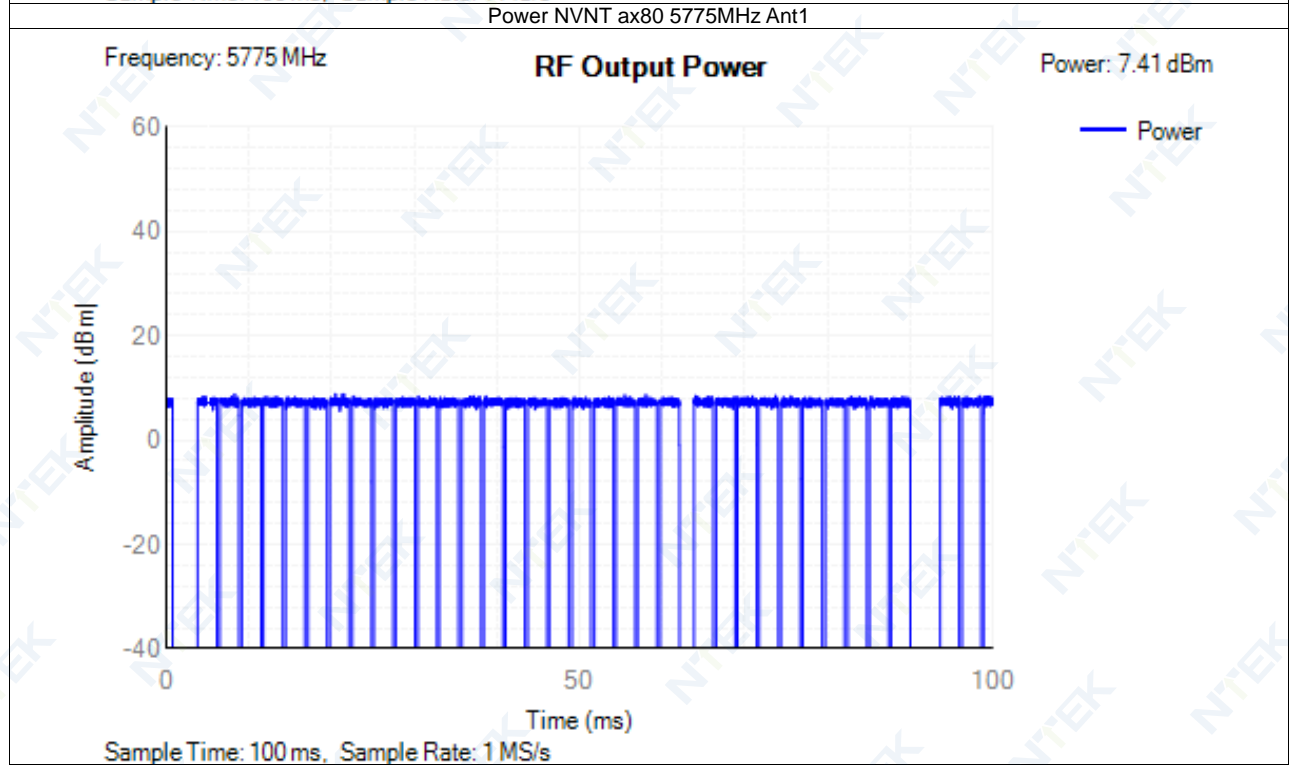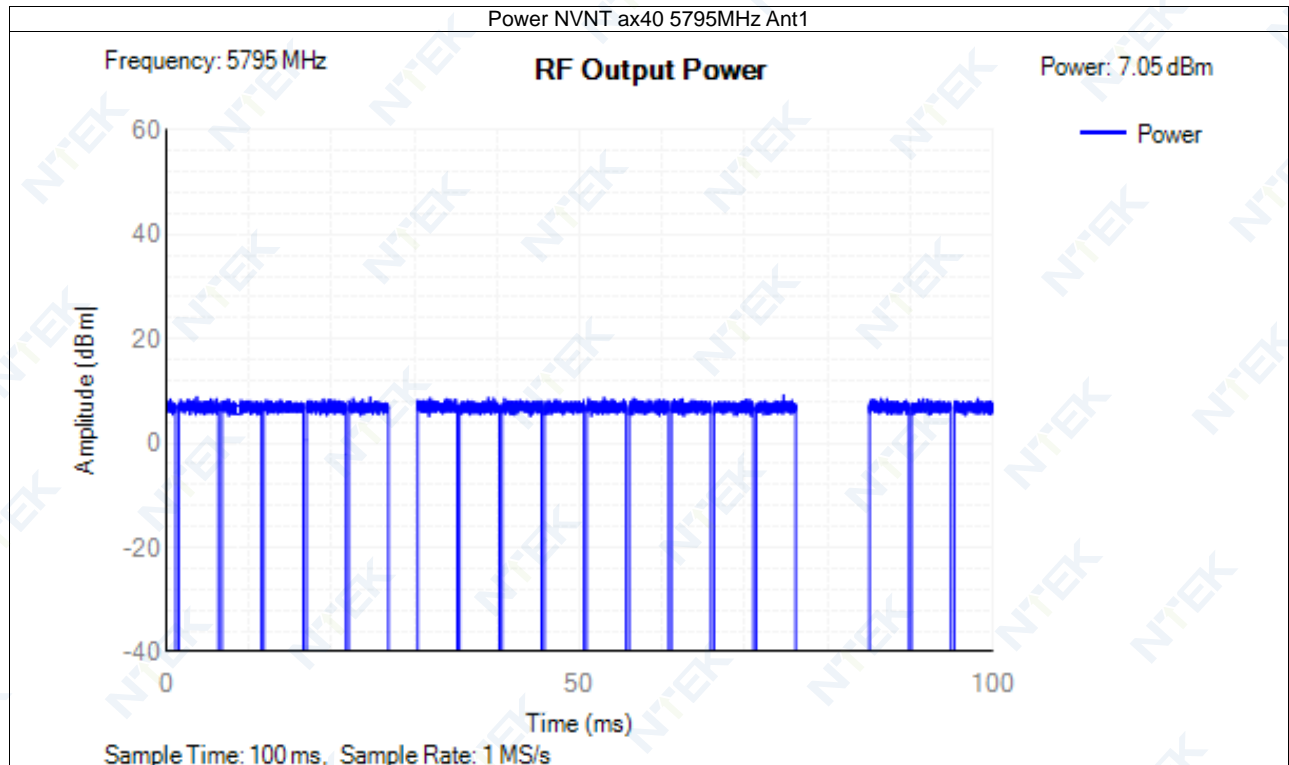

11. EUT TEST PHOTO

SPURIOUS EMISSIONS MEASUREMENT PHOTOS

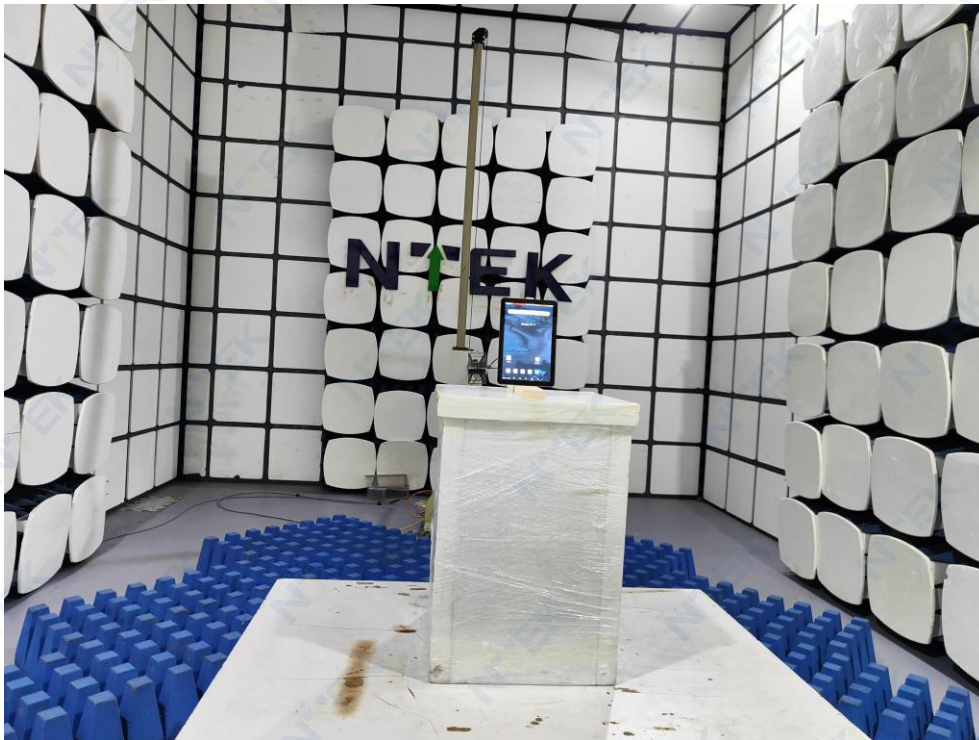

END OF REPORT