

# Radio Test Report-GPS

## ETSI EN 303 413 V1.2.1 (2021-04)

### Client Information:

Applicant: DOKE COMMUNICATION (HK) LIMITED  
Applicant add.: RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK  
CHINA

### Product Information:

Product Name: Tablet PC  
Model No.: Active 8  
Serial Model: N/A  
Brand Name: Blackview  
Report No.: AIT23052502-1

### Prepared By:

#### Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan,  
Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: 2023.05.25 Date of Test: 2023.05.25-2023.06.13

Date of Issue: 2023.06.14 Test Result: Pass

This device has been tested and found to comply with the stated standard(s), which is (are) required by the council directive of 2014/53/EU and indicated in the test report and are applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by:

  
Simba huang

Approved by:

  
Seal.chen





**REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2023.06.14	Valid	Initial release

## TABLE OF CONTENTS

<b>1. TECHNICAL INFORMATION .....</b>	<b>4</b>
1.1. EUT DESCRIPTION .....	4
1.2. OBJECTIVE .....	5
1.3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION .....	5
1.4. ENVIRONMENTAL CONDITIONS .....	5
1.5. TEST CONFIGURATION AND REQUIREMENTS .....	5
1.6. TEST ITEMS AND THE RESULTS .....	8
1.7. MEASUREMENT UNCERTAINTY .....	8
<b>2. DESCRIPTION OF TEST MODE .....</b>	<b>9</b>
<b>3. LIST OF EQUIPMENTS USED .....</b>	<b>10</b>
<b>4. REQUIREMENT TO RECEIVER .....</b>	<b>11</b>
4.1 ETSI EN 303 413 SUB. 4.2.1: ADJACENT CHANNEL BAND SELECTIVITY .....	11
4.2 ETSI EN 303 413 SUB. 4.2.2: RECEIVER SPURIOUS EMISSIONS .....	14
<b>5. PHOTOGRAPHS OF TEST SETUP .....</b>	<b>17</b>

## 1. TECHNICAL INFORMATION

### 1.1. EUT DESCRIPTION

Details of technical specification refer to the description in follows:

<b>Manufacturer:</b>	Shenzhen DOKE Electronic Co., Ltd
<b>Manufacturer Address:</b>	801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China
<b>Hardware Version</b>	DK051-T616-V1.0
<b>Software Version</b>	Active8_EEA_T30_V1.0
<b>Antenna Gain</b>	1.5dBi
<b>Antenna type</b>	FPC Antenna
<b>Power Supply</b>	DC 3.87V 22000mAh for Battery
<b>GPS</b>	
<b>Test Mode</b>	GPS Mode (Only receive)
<b>Receiver Frequency</b>	1575.42 MHz ± 1.023 MHz
<b>Modulation Technology</b>	CDMA
<b>Modulation Type</b>	BPSK
<b>GLONASS</b>	
<b>Test Mode</b>	GLONASS Mode (Only receive)
<b>Receiver Frequency</b>	1602 MHz+ n x0.5625 MHz ("n" is a satellite's frequency channel number from -7~6)
<b>Modulation Technology</b>	FDMA
<b>Modulation Type</b>	BPSK
<b>BDS</b>	
<b>Test Mode</b>	BDS Mode (Only receive)
<b>Receiver Frequency</b>	1561.098 MHz ± 2.046MHz
<b>Modulation Technology</b>	CDMA
<b>Modulation Type</b>	BPSK
<b>GALILEO</b>	
<b>Test Mode</b>	GALILEO Mode (Only receive)
<b>Receiver Frequency</b>	1575.42 MHz ± 1.023 MHz
<b>Modulation Technology</b>	CDMA
<b>Modulation Type</b>	CBOC

**Note:** For more details, please refer to the user's manual.

### 1.2. OBJECTIVE

Perform Radio Spectrum tests for CE Marking according to the provisions of article 3.2 of the Radio Equipment Directive (2014/53/EU) for the Satellite Earth Stations and Systems (SES) Global Navigation Satellite System (GNSS) receivers.

### 1.3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

<b>Test Site</b>	Dongguan Yaxu (AiT) Technology Limited
<b>Location</b>	Add: No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan, Guangdong, China
<b>CNAS- Registration No</b>	L6177

### 1.4. ENVIRONMENTAL CONDITIONS

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	-10°C ~-50°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 3.87V	LV DC 3.28/HV DC 4.45V

Note: (1) The HT40°C and LT0°C was declared by manufacturer

### 1.5. TEST CONFIGURATION AND REQUIREMENTS

GNSS are provided for GPS, GLONASS, BDS and GALILEO:

GNSS	RNСС FREQUENCY
GPS	1575.42MHz
GLONASS	1605.375MHz
BDS	1561.098MHz
GALILEO	1575.42MHz

EUT CONFIGURE MODE	APPLICABLE TO			DEXCRIPTION
	ASS	SE<1G	SE≥1G	
GPS/GLONASS/BD S/GALILEO	√	√	√	-

Where

**ASS:** Adjacent signal selectivity

**SE<1G:** Unwanted Emissions in the Spurious Domain below 1 GHz

**SE≥ 1G:** Unwanted Emissions in the Spurious Domain above 1 GHz

**NOTE:** 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when Positioned on **X-plane**.

**ADJACENT SIGNAL SELECTIVITY :**

Following Supported GNSS(s) was (were) selected for the final test as listed below.

GNSS	GNSS Signals			
BDS	<input checked="" type="checkbox"/> B1			
GALILEO	<input checked="" type="checkbox"/> E1	<input type="checkbox"/> E5a	<input type="checkbox"/> E5b	<input type="checkbox"/> E6
GLONASS	<input checked="" type="checkbox"/> G1	<input type="checkbox"/> G2		
GPS	<input checked="" type="checkbox"/> L1	<input type="checkbox"/> L2	<input type="checkbox"/> L5	

GNSS, GNSS signals and RNSS frequency bands

GNSS	GNSS Signal Designations	RNSS Frequency Band(mhz)
BDS	B1	1559 to 1610
GALILEO	E1	1559 to 1610
	E5a	1164 to 1215
	E5b	1164 to 1215
	E6	1215 to 1300
GLONASS	G1	1559 to 1610
	G2	1215 to 1300
GPS	L1	1559 to 1610
	L2	1215 to 1300
	L5	1164 to 1215

Frequency bands, adjacent frequency signal test point centre frequencies and power levels for the 1559 MHz to 1610 MHz RNSS band

Frequency band(MHz)	Test point center frequency(MHz)	Adjacent frequency signal power level(dBm)	Comments
1518-1525	1524	-65	MSS(space-to-Earth) band
1525-1549	1548	-95	MSS(space-to-Earth) band
1549-1559	1554	-105	MSS(space-to-Earth) band
1559-1610	GUE RNSS band under test		
1610-1626	1615	-105	MSS(space-to-Earth)

			band
1626-1640	1627	-85	MSS(space-to-Earth) band

Frequency bands, adjacent frequency signal test point centre frequencies and power levels for the 1164 MHz to 1300 MHz RNSS band

Frequency band (MHz)	Test point center frequency (MHz)	Adjacent frequency signal power level(dBm)	Comments
960-1164	1154	-75	AM(R)S, ARNS band
1164-1215	GUE RNSS band under test		
1215-1260	GUE RNSS band under test		
1260-1300	GUE RNSS band under test		
1300-1350	1310	-85	Radiolocation, ARNS, RNSS(Earth-to-space)band

GUE RNSS band under test

GNSS	Parameters	Value
GPS	(Maximum) signal level	-128.5dBm
Galileo	(Maximum) signal level	-127.0dBm
GLONASS	(Maximum) signal level	-131.0dBm
SBAS	(Maximum) signal level	-131.0dBm

**UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN TEST (BELOW 1 GHZ):**

Following GNSS(s) was (were) selected for the final test as listed below.

EUT Configure Mode	GNSS	GNSS Signal Designations	RNSS Frequency (MHz)
	GPS	L1	1575.420 MHz
	GLONASS	G1	1605.375 MHz
	BDS	B1	1561.098 MHz
	GALILEO	E1	1575.420 MHz

**UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN TEST (ABOVE 1 GHZ):**

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	GNSS	GNSS Signal Designations	RNSS Frequency (MHz)
-	GPS	L1	1575.420 MHz
	GLONASS	G1	1605.375 MHz
	BDS	B1	1561.098 MHz
	GALILEO	E1	1575.420 MHz

**1.6. TEST ITEMS AND THE RESULTS**

Test items and the results are as bellow:

BASIC STANDARD	TEST TYPE	RESULT
EN 303 413 Clause 4.2.1	Adjacent signal selectivity	Pass
EN 303 413 Clause 4.2.2	Receiver spurious emissions	Pass

**1.7. MEASUREMENT UNCERTAINTY**

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:

Parameters	Uncertainty
Radio frequency	$\pm 1 \cdot 10^{-7}$
Radiated emission of receiver, valid to 26.5GHz	$\pm 6$ dB
Radiated emission of receiver, valid between 26.5GHz and 66GHz	$\pm 8$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
Voltage (DC)	$\pm 1$ %
Voltage (AC, < 10kHz)	$\pm 2$ %

Note: For radiated emissions above 26.5GHz it may not be possible to achieve measurement uncertainties complying with the levels specified in this table. In these cases alone it is acceptable to employ the alternative interpretation procedure specified in clause 10.1

For the test methods, according to the present document the uncertainty figures shall be calculated according to the methods described in the TR 100 028 [i.4] and shall correspond to an expansion factor (coverage factor)  $k = 1,96$  or  $k = 2$  (which provide confidence levels of respectively 95 % and 95,45 % in case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).





## 2. DESCRIPTION OF TEST MODE

NO.	TEST MODE DESCRIPTION
1	RX ( Operating GPS Mode)
2	RX ( Operating GLONASS Mode)
3	RX ( Operating BDS Mode)
4	RX ( Operating GALILEO Mode)
5	Stand-by


**3. LIST OF EQUIPMENTS USED**

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	EMI Measuring Receiver	R&S	ESR	101160	2022.09.02	2023.09.01
2	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2022.09.02	2023.09.01
3	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3207	2021.08.29	2024.08.28
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2022.09.02	2023.09.01
5	Spectrum Analyzer	R&S	FSV40	101470	2022.09.02	2023.09.01
6	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2022.09.02	2023.09.01
7	Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	452	2021.08.29	2024.08.28
8	Filter	MICRO-TRONICS	BRM50702-02	16	2022.09.02	2023.09.01
9	Filter	MICRO-TRONICS	BRC50703-02	17	2022.09.02	2023.09.01
10	Filter	MICRO-TRONICS	BRC50705-02	18	2022.09.02	2023.09.01

## 4. REQUIREMENT TO RECEIVER

### 4.1 ETSI EN 303 413 SUB. 4.2.1: ADJACENT CHANNEL BAND SELECTIVITY

#### TEST SETUP

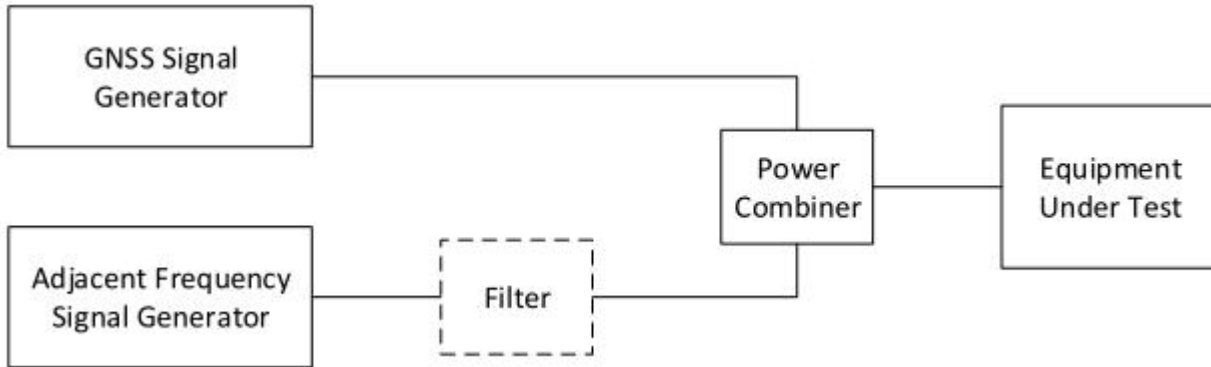

#### SPECIFICATIONS:

The  $C/N_0$  metric reported by the GUE for all GNSS and GNSS signals given in table 4-1 and supported by the GUE shall not degrade by more than the value given in equation 4-1 when an adjacent frequency signal is applied.

Equation 4-1: Maximum degradation in  $C/N_0$

$$\Delta C/N_0 \leq 1 \text{ dB}$$

**Table 4-1: GNSS, GNSS signals and RNSS frequency bands**

GNSS	GNSS Signal Designations	RNSS Frequency Band (MHz)
BDS	B1I	1 559 to 1 610
Galileo	E1	1 559 to 1 610
	E5a	1 164 to 1 215
	E5b	1 164 to 1 215
	E6	1 215 to 1 300
GLONASS	G1	1 559 to 1 610
	G2	1 215 to 1 300
GPS	L1	1 559 to 1 610
	L2	1 215 to 1 300
	L5	1 164 to 1 215
SBAS	L1	1 559 to 1 610
	L5	1 164 to 1 215

**TEST PROCEDURE:**

1. Configure the GNSS signal generator to simulate those GNSS and GNSS signals from table 4-1 declared as supported by the GUE, with power levels and other details as specified in clause B.2..
2. With the adjacent frequency signal switched off, the EUT shall be given sufficient time to acquire all simulated satellites from the declared GNSS system(s).
3. Record the baseline C/N<sub>0</sub> value(s) reported by the EUT. Sufficient filtering shall be used to obtain a stable value. C/N<sub>0</sub> may be averaged across all the satellites in view for each GNSS constellation. However, C/N<sub>0</sub> shall not be averaged across satellite signals in different GNSS constellations. For a multi-GNSS EUT, there shall be a separate C/N<sub>0</sub> value recorded for each GNSS constellation and each GNSS signal supported.
4. The adjacent frequency signal shall be switched on, and the EUT's C/N<sub>0</sub> value(s) recorded as in step 3) to measure the degradation with respect to the baseline value(s) recorded in step 3).
5. Test point Pass/Fail Criteria: If the C/N<sub>0</sub> degradation from step 5) does not exceed the value in equation 4-1, then this test point is set to "pass". If the C/N<sub>0</sub> degradation exceeds the value in equation 4-1, then this test point is set to "fail." For a multi-GNSS and multi-signal EUT, there shall be a separate pass/fail determination for each GNSS and for each GNSS signal supported. If the C/N<sub>0</sub> degradation exceeds the value in equation 4-1 for any supported GNSS or supported GNSS signal, then this test point is set to "fail".

**TEST RESULT:**

**GPS:**

Test point centre frequency (MHz)	Adjacent frequency signal power level (dBm)	No interfering signal	With interfering signal	Limit	Measurement value (Max Hold) (dB)	Result
1 554MHz	-105 dBm	40.84	40.80	Decrease ≤ 1 dB	0.04	Pass
1 615MHz	-105 dBm	40.82	40.16	Decrease ≤ 1 dB	0.66	Pass
1 548MHz	-95 dBm	41.39	41.33	Decrease ≤ 1 dB	0.06	Pass
1 627MHz	-85 dBm	40.94	40.36	Decrease ≤ 1 dB	0.58	Pass
1 524MHz	-65 dBm	41.25	40.54	Decrease ≤ 1 dB	0.71	Pass

**GLONASS:**

Test point centre frequency (MHz)	Adjacent frequency signal power level (dBm)	No interfering signal	With interfering signal	Limit	Measurement value (Max Hold) (dB)	Result
1 554MHz	-105 dBm	39.61	39.23	Decrease ≤ 1 dB	0.39	Pass
1 615MHz	-105 dBm	40.94	40.70	Decrease ≤ 1 dB	0.24	Pass
1 548MHz	-95 dBm	40.64	40.27	Decrease ≤ 1 dB	0.37	Pass
1 627MHz	-85 dBm	41.02	40.26	Decrease ≤ 1 dB	0.75	Pass
1 524MHz	-65 dBm	40.98	40.63	Decrease ≤ 1 dB	0.36	Pass

**BDS:**

Test point centre frequency (MHz)	Adjacent frequency signal power level (dBm)	No interfering signal	With interfering signal	Limit	Measurement value (Max Hold) (dB)	Result
1 554MHz	-105 dBm	39.87	39.82	Decrease $\leq$ 1 dB	0.45	Pass
1 615MHz	-105 dBm	40.69	40.39	Decrease $\leq$ 1 dB	0.49	Pass
1 548MHz	-95 dBm	39.87	39.77	Decrease $\leq$ 1 dB	0.10	Pass
1 627MHz	-85 dBm	40.52	39.95	Decrease $\leq$ 1 dB	0.71	Pass
1 524MHz	-65 dBm	40.23	39.87	Decrease $\leq$ 1 dB	0.72	Pass

**GALILEO:**

Test point centre frequency (MHz)	Adjacent frequency signal power level (dBm)	No interfering signal	With interfering signal	Limit	Measurement value (Max Hold) (dB)	Result
1 554MHz	-105 dBm	41.29	40.65	Decrease $\leq$ 1 dB	0.64	Pass
1 615MHz	-105 dBm	41.87	41.31	Decrease $\leq$ 1 dB	0.56	Pass
1 548MHz	-95 dBm	41.60	41.39	Decrease $\leq$ 1 dB	0.20	Pass
1 627MHz	-85 dBm	41.65	40.85	Decrease $\leq$ 1 dB	0.80	Pass
1 524MHz	-65 dBm	41.67	41.57	Decrease $\leq$ 1 dB	0.10	Pass


If the EUT passes the C/N<sub>0</sub> degradation test for all test points for all GNSS constellations and all GNSS signals declared as supported from table 4-1, the EUT shall be deemed to "pass".

**4.2 ETSI EN 303 413 SUB. 4.2.2: RECEIVER SPURIOUS EMISSIONS**

**TEST LIMITS**

The power of any spurious emission shall not exceed 2 nW in the range 25 MHz to 1 GHz and shall not exceed 20 nW on frequencies above 1 GHz.

**TEST SETUP**

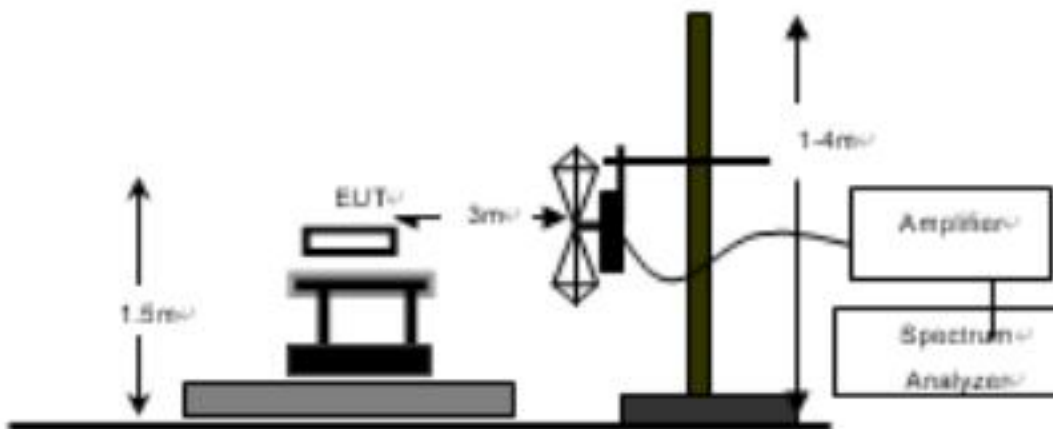

**TEST PROCEDURE**

EUT was placed on a 1.5m outdoor wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.

**TEST RESULTS**

**GPS (1575.42 MHz):**

Frequency. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power (dBm)	Limit (dBm)
366.14	H	-80.05	12.73	-67.27	-57
1567.66	H	-82.44	11.37	-69.55	-47
3249.10	H	-78.88	10.18	-67.3	-47
366.23	V	-87.80	11.79	-74.87	-57
1567.83	V	-80.75	10.93	-68.75	-47
3248.56	V	-76.10	11.57	-64.34	-47
Other (25-1000)	~	~	~	~	-57
Other (1G-26G)	~	~	~	~	-47

**GLONASS (1605.375MHz):**

Frequency. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power (dBm)	Limit (dBm)
366.04	H	-80.94	11.95	-67.27	-57
1567.99	H	-81.73	11.33	-69.55	-47
3249.04	H	-79.19	10.50	-67.3	-47
366.04	V	-87.87	11.27	-74.87	-57
1567.45	V	-80.73	11.48	-68.75	-47
3248.96	V	-76.33	11.07	-64.34	-47
Other (25-1000)	~	~	~	~	-57
Other (1G-26G)	~	~	~	~	-47

**BDS (1561.098MHz):**

Frequency. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power (dBm)	Limit (dBm)
365.77	H	-80.85	11.88	-68.97	-57
1567.85	H	-81.88	11.57	-70.31	-47
3248.90	H	-78.89	10.29	-68.60	-47
366.41	V	-87.14	11.93	-75.22	-57
1567.15	V	-80.65	10.86	-69.79	-47
3248.64	V	-76.76	10.90	-65.86	-47
Other (25-1000)	~	~	~	~	-57
Other (1G-26G)	~	~	~	~	-47

**GALILEO (1575.42MHz):**

Frequency. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power (dBm)	Limit (dBm)
366.51	H	-80.97	12.55	-67.27	-57
1567.85	H	-81.89	11.60	-69.55	-47
3248.44	H	-78.84	10.97	-67.3	-47
365.90	V	-87.25	12.05	-74.87	-57
1567.81	V	-80.61	11.02	-68.75	-47
3248.57	V	-76.63	11.56	-64.34	-47
Other (25-1000)	~	~	~	~	-57
Other (1G-26G)	~	~	~	~	-47


**Note:**

“~” in the table above means that the emissions are too small to be measured and are at least 20 dB below the limit. The frequency range below 1GHz is 30MHz to 1GHz and the frequency range above 1GHz is 1GHz to 26GHz.




## 5. PHOTOGRAPHS OF Test SETUP

### RADIATED EMISSION TEST SETUP

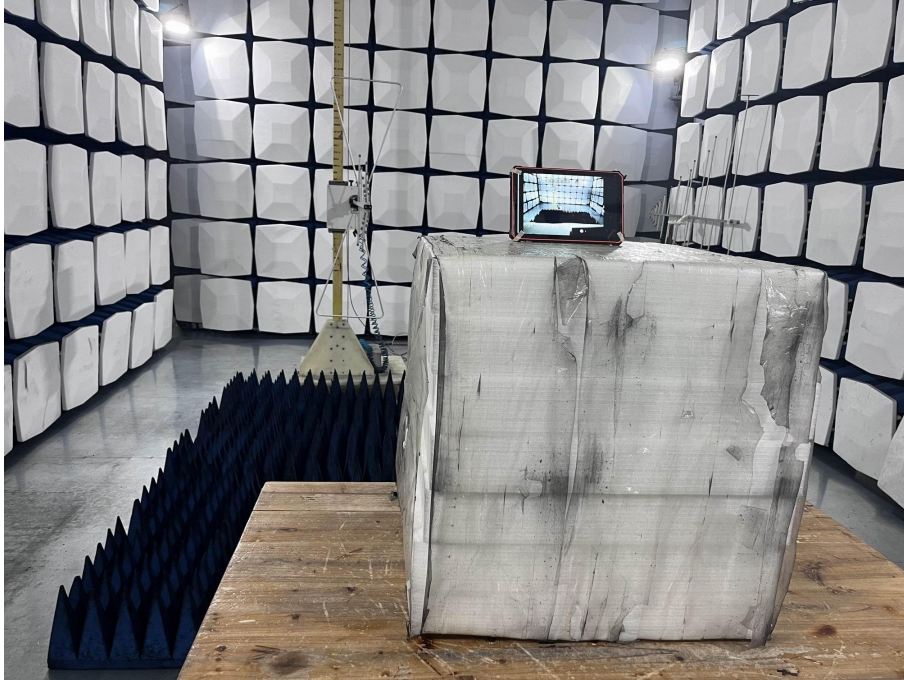

### RADIATED EMISSION ABOVE 1G TEST SETUP

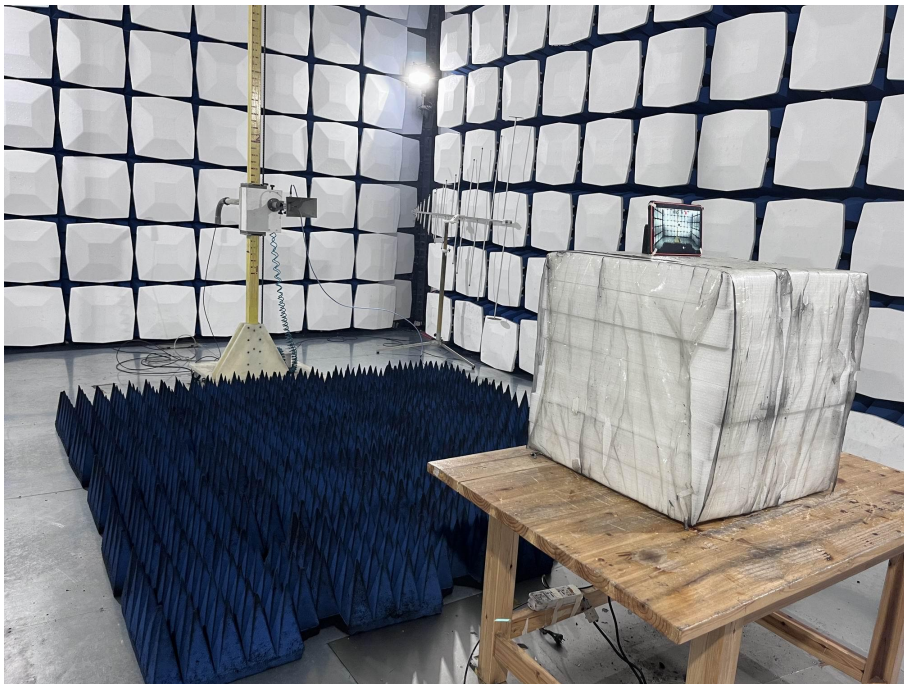

----END OF REPORT----