

EMC TEST REPORT

ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-3 V2.1.1 (2019-03) ETSI EN 301 489-17 V3.2.4 (2020-09) ETSI EN 301 489-19 V2.1.1 (2019-04) ETSI EN 301 489-52 V1.2.1 (2021-11) EN 55032:2015+A11:2020 EN 55035:2017+A11:2020 EN IEC 61000-3-2:2019 EN 61000-3-3:2013+A1:2019

Product: Smart Phone

Trade Mark: Blackview

Model Name: BL8800 Pro

Family Model: BL8800

Report No.: STR220218001013E

Prepared for

DOKE COMMUNICATION (HK) LIMITED.

RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK,
CHINA.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,Xixiang Street Bao'an District, Shenzhen 518126 P.R. China Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: http://www.ntek.org.cn



TEST RESULT CERTIFICATION

Applicant's Name.....: DOKE COMMUNICATION (HK) LIMITED.

Address RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD

WANCHAI HK. CHINA.

Manufacturer's Name: Shenzhen DOKE Electronic Co.,Ltd.

Road, Guangming District, Shenzhen, China.

Product description

Product name: Smart Phone
Trade Mark: Blackview
Model Name ...: BL8800 Pro
Family Model ...: BL8800

ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-3 V2.1.1 (2019-03) ETSI EN 301 489-17 V3.2.4 (2020-09)

Standards: ETSI EN 301 489-19 V2.1.1 (2019-04)

ETSI EN 301 489-52 V1.2.1 (2021-11)

EN 55032:2015+A11:2020; EN 55035:2017+A11:2020 EN IEC 61000-3-2:2019;EN 61000-3-3:2013+A1:2019

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the of article 3.1(b) of the Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests.....: Feb 18. 2028 ~ Mar 11. 2022

Date of Issue....: Mar 11. 2022

Test Result: Pass

Testing Engineer :

(Allen Huang)

Authorized Signatory:

(Alex Li)



	Table of Contents	Page
1	. TEST SUMMARY	5
	1.1 TEST FACILITY	7
	1.2 MEASUREMENT UNCERTAINTY	7
2	. GENERAL INFORMATION	9
	2.1 GENERAL DESCRIPTION OF EUT	9
	2.2 DESCRIPTION OF TEST MODES	12
	2.3 DESCRIPTION OF TEST SETUP	14
	2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	15
	2.5 MEASUREMENT INSTRUMENTS LIST	16
3	. EMC EMISSION TEST	20
	3.1 CONDUCTED EMISSION MEASUREMENT	20
	3.1.1 POWER LINE CONDUCTED EMISSION	20
	3.1.2 TELECOMMUNICATION PORT CONDUCTED EMISSION(VOLTAG 3.1.3 TEST PROCEDURE	SE LIMITS) 21 23
	3.1.4 TEST SETUP	23
	3.1.5 EUT OPERATING CONDITIONS	23
	3.1.6 TEST RESULTS	24
	3.2 RADIATED EMISSION MEASUREMENT	26
	3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT	26 27
	3.2.3 TEST PROCEDURE	28
	3.2.4 TEST SETUP	28
	3.2.5 EUT OPERATING CONDITIONS	29
	3.2.6 TEST RESULTS (30-1000MHz) 3.2.7 TEST RESULTS(1000-6000MHz)	30 32
	3.3 HARMONICS CURRENT	33
	3.3.1 LIMITS OF HARMONICS CURRENT	33
	3.3.2 TEST PROCEDURE	34
	3.3.3 EUT OPERATING CONDITIONS 3.3.4 TEST SETUP	34 34
	3.3.5 TEST RESULTS	35
	3.4 VOLTAGE FLUCTUATION AND FLICKERS	36
	3.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS	36
	3.4.2 TEST PROCEDURE	36
	3.4.3 EUT OPERATING CONDITIONS 3.4.4 TEST SETUP	36 37
	3.4.5 TEST RESULTS	38



	Table of Contents	Page
4	. EMC IMMUNITY TEST	39
	4.1 GENERAL PERFORMANCE CRITERIA	39
	4.1.1 PERFORMANCE CRITERIA	39
	4.2 GENERAL PERFORMANCE CRITERIA TEST SETUP	43
	4.3 ESD TESTING	44
	4.3.1 TEST SPECIFICATION	44
	4.3.2 TEST PROCEDURE 4.3.3 TEST SETUP	44 45
	4.3.4 TEST RESULTS	46
	4.3.5 PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED	49
	4.4 RS TESTING	50
	4.4.1 TEST SPECIFICATION	50
	4.4.2 TEST PROCEDURE	50
	4.4.3 TEST SETUP 4.4.4 TEST RESULTS	51 52
	4.5 EFT/BURST TESTING	56
	4.5.1 TEST SPECIFICATION	56
	4.5.2 TEST PROCEDURE	56
	4.5.3 TEST SETUP	57
	4.5.4 TEST RESULTS	58
	4.6 SURGE TESTING	60
	4.6.1 TEST SPECIFICATION 4.6.2 TEST PROCEDURE	60 60
	4.6.3 TEST SETUP	61
	4.6.4 TEST RESULTS	62
	4.7 INJECTION CURRENT TESTING	64
	4.7.1 TEST SPECIFICATION	64
	4.7.2 TEST PROCEDURE 4.7.3 TEST SETUP	64 64
	4.7.4 TEST RESULTS	66
	4.8 VOLTAGE INTERRUPTION/DIPS TESTING	69
	4.8.1 TEST SPECIFICATION	69
	4.8.2 TEST PROCEDURE	69
	4.8.3 TEST SETUP	69
	4.8.4 TEST RESULTS	70
5	. EUT TEST PHOTO	71





1. TEST SUMMARY

Test procedures according to the technical standards:

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-3 V2.1.1 (2019-03)

ETSI EN 301 489-17 V3.2.4 (2020-09)

ETSI EN 301 489-19 V2.1.1 (2019-04)

ETSI EN 301 489-52 V1.2.1 (2021-11)

EN 55032:2015+A11:2020; EN 55035:2017+A11:2020

EN IEC 61000-3-2:2019;EN 61000-3-3:2013+A1:2019

EMC Emission

Standard	Test Item	Limit	Judgment	Remark
10t - 21°	Conducted Emission On AC And Telecom Port 150kHz to 30MHz	Class B	PASS	
4	Disturbance Voltage at The Antenna Terminals (30MHz To 2150MHz)		N/A	
EN 55032:2015+A11:20 20	Wanted signal and disturbance voltage at the RF output terminals (30MHz To 2150MHz)		N/A	4
	Radiated Emission 30MHz to 1000MHz	Class B	PASS	
7 4	Radiated Emission 1GHz to 6GHz	Class B	PASS	4
EN IEC 61000-3-2:2019	Harmonic Current Emission	Class A	N/A	NOTE (1)
EN 61000-3-3:2013+A1: 2019	Voltage Fluctuations & Flicker		PASS	4

EMC Immunity

Section EN 55035:2017+A11:2020	Test Item	Performance Criteria	Judgment	Remark
EN 61000-4-2:2009	Electrostatic Discharge	В	PASS	
EN 61000-4-3:2006+ A1:2008+A2:2010	RF electromagnetic field	A	PASS	3
EN 61000-4-4:2012	Fast transients	В	PASS	<u>ئ</u> ــ
EN 61000-4-5:2014+ A1:2017	Surges	В	PASS	
EN 61000-4-6:2014	Continuous radio frequency disturbances or Injected Current	A	PASS	£
EN 61000-4-8:2010	Power Frequency Magnetic Field	A	N/A	NOTE (3)
EN 61000-4-11:2004	Volt. Interruptions Volt. Dips	B / C / C NOTE (2)	PASS	1

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) Voltage dip: 100% reduction Performance Criteria **B** Voltage dip: 30% reduction Performance Criteria **C**
 - Voltage Interruption: 100% Interruption Performance Criteria C
- (3) Applicable only to equipment containing devices intrinsically susceptible to magnetic fields, such as CRT monitors, Hall effect elements, electro-dynamic microphones, magnetic field sensors or audio frequency transformers.
- (4) For client's request and manual description, the test will not be executed.





1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add.: 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

CNAS-Lab. : The Certificate Registration Number is L5516
IC-Registration : The Certificate Registration Number is CN0074

FCC- Accredited : Test Firm Registration Number: 463705

Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for

the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately $\mathbf{95}$ %.

Test Item	Measurement Frequency Range	K	U(dB)
AC Mains Conducted Emission	0.009kHz ~ 0.15MHz	2	2.66
AC Mains Conducted Emission	0.15MH ~ 30MHz	2	2.80
Telecom Conducted Emission (Cat 3)	0.15MHz ~ 30MHz	2	2.40
Telecom Conducted Emission (Cat 5)	0.15MHz ~ 30MHz	2	2.58
Radiated Emission	30MHz ~ 1000MHz	2	2.64
Radiated Emission	1000MHz ~ 6000MHz	2	2.40
Radiated Emission	6000MHz ~ 18000MHz	2	2.52





Revision History

Report No.	Version	Description	Issued Date
STR220218001013E	Rev.01	Initial issue of report	Mar 11. 2022
W 20 6		4 5	1
3		2,0	
4	40		
		34, 4,	*
	7		* 3
		T 1/2 2	
	X -		
*			F %
* *			31
	4		
		-	٠ ٨- ١
		* *	
		* 3, 3,	
4	<u> </u>	W	.0
* 3	,	4	4
* 3, 2		- A- A	
			* <
			3" - 5
		3*	
	4		
\		3	
A 200	4		
* * *			
<u> </u>	4		* 4
.L			
		* 2,	
7 7	*	3	
			2
	>		



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Trade Mark	Blackview
Model Name	BL8800 Pro
Family Model	BL8800
Model Difference	All the model are the same circuit and RF module, except the Model name.
	⊠BT: 2402~2480 MHz
	⊠2.4G WIFI: 802.11b/g/n(20MHz): 2412~2472MHz
	T
	802.11n(40MHz):2422~2462MHz
	⊠5G WIFI:802.11a/ n(20/40)/ ac(20/40/80):
	5180MHz~5240MHz;(20MHz)
	5190MHz~5230MHz;(40MHz)
	5210MHz;(80MHz)
	5745-5825 MHz for 802.11a/n20/ac20;
	5755-5795 MHz for 802.11n40/ac40;
	5775MHz for 802.11 ac80;
	☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
	S25 500MH2 (TX) SGSM/GPRS/EGPRS 1800: 1710~1785MHz(TX)
	1805~1880MHz(Rx)
Frequency Bands:	
	WCDMA Band VIII: 880~915MHz(TX);
	925~960MHz(RX)
	☑ E-UTRA FDD I, III, VII, VIII, XX, XXVIII
	E-UTRA TDD XL FDD Band I: Uplink: 1920 MHz to 1980MHz
	Downlink: 2110 MHz to 2170 MHz
	FDD Band III: Uplink:1710 MHz to 1785 MHz
	Downlink: 1805 MHz to 1880 MHz
	FDD Band VII: Uplink: 2500 MHz to 2570 MHz Downlink: 2620 MHz to 2690 MHz
	FDD Band VIII: Uplink: 880MHz to 915 MHz
	Downlink: 925 MHz to 960 MHz
	FDD Band XX: Uplink: 832 MHz to 862 MHz
	Downlink: 791 MHz to 821 MHz
	FDD Band XXVIII: Uplink: 703 MHz to 748MHz
	Downlink: 758 MHz to 803 MHz

TDD Band XL: Uplink & Downlink: 2300 MHz to 2400 MHz NR FDD: n1, n3, n8,n20,n28 NR TDD: n38, n77, n78 EN-DC: DC 1A n78A NR FDD n1: Uplink: 1920 MHz to 1980MHz Downlink: 2110 MHz to 2170 MHz NR FDD n3: Uplink: 1710 MHz to 1785 MHz Downlink: 1805 MHz to 1880 MHz NR FDD n8: Uplink: 880 MHz to 815 MHz Frequency Bands Downlink: 925 MHz to 960 MHz NR FDD n20: Uplink: 832 MHz to 862 MHz Downlink: 791 MHz to 821 MHz NR FDD n28: Uplink: 703 MHz to 748 MHz Downlink: 758 MHz to 803 MHz NR TDD n38: Uplink & Downlink: 2570 MHz -2620 MHzNote1 NR TDD n77: Uplink & Downlink: 3300 MHz - 4200 MHz NR TDD n78: Uplink & Downlink: 3300 MHz - 3800 MHz □ GPS Receiver: 1.57542GHz NFC: 13.56 MHz ☑FM Receiver: 87.5 MHz to 108 MHz ⊠BT(1Mbps)/BLE: GFSK ⊠BT EDR(2Mbps):∏/4-DQPSK ⊠BT EDR(3Mbps): 8-DPSK ⊠BLE(2M):GFSK □IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) ☑IEEE 802.11g/n (HT20/HT40): OFDM(64QAM, 16QAM, QPSK, BPSK) ⊠802.11a:OFDM (BPSK / QPSK / 16QAM) ⊠802.11n:OFDM (QPSK/BPSK/16QAM/64QAM) ≥802.11ac:OFDM (QPSK/BPSK/16QAM/64QAM/256QAM) Modulation Mode: ⊠GSM/GPRS/EGPRS: GMSK/8PSK ⊠WCDMA(HSDPA/HSUPA): QPSK ☑LTE :QPSK, 16QAM ☑ NR : DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM □GPS Receiver: BPSK NFC: ASK SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is SIM Card: chosen for test. Power Rating DC 3.85V from battery or DC 5V from Adapter. Model: QA-0300CE03 Input: 100-240V~50/60Hz 0.8A Adapter Output: (PD)5.0V---3.0A or 9.0---3.0A or 12.0V---2.5A or 15.0V---2.0A or 20.0A---1.5A (PPS) 3.3A-11.0V---3.0A(33.0W MAX) Battery DC 3.85V, 8380mAh, 32.263Wh Connecting I/O Port(s) Please refer to the User's Manual



Page 11 of 75 Report No.: STR220218001013E

Antenna:	BT/WIFI/GPS: PIFA Antenna; GSM/WCDMA/LTE: PIFA Antenna; FM: Use earphone as Antenna; NFC: Induction coil	
Hard Ware Version	TF929-B1-V1.1	
Soft Ware Version	BL8800 Pro_EEA_TF929_V1.0	





2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description		
Mode 1	REC		
Mode 2	FM(87.6MHz / 98MHz / 107.9MHz)		
Mode 3	Data transmission		
Mode 4	GPS Receiver		
Mode 5	BT Link mode		
Mode 6	Wi-Fi 2.4G / 5.2G / 5.8G		
Mode 7	GSM / GPRS / EGPRS 900 / 1800		
Mode 8	WCDMA / HSDPA / HSUPA B1 / B8		
Mode 9	LTE Band 1 / 3 / 7 / 8 / 20 / 28 / 40		
Mode 10	NFC		
Mode 11	NR FDD n1/ n3/ / n8 / n20 / n28, NR TDD n38/ n77 / n78, EN-DC: DC_1A_n78A		

For Conducted Test			
Final Test Mode	Description		
Mode 1	REC		





For Radiated Test

Final Test Mode Description

Mode 1 REC

Pretest Mode	Description	
Mode 1	REC	
Mode 2	FM(87.6MHz / 98MHz / 107.9MHz)	
Mode 3	Data transmission	
Mode 4	GPS Receiver	
Mode 5	BT Link mode	
Mode 6	Wi-Fi 2.4G / 5.2G / 5.8G	
Mode 7	GSM / GPRS / EGPRS 900 / 1800	
Mode 8	WCDMA / HSDPA / HSUPA B1 / B8	
Mode 9	LTE Band 1 / 3 / 7 / 8 / 20 / 28 / 40	
Mode 10	NFC	
Mode 11	NR FDD n1/ n3/ / n8 / n20 / n28, NR TDD n38/ n77 / n78, EN-DC: DC_1A_n78A	
Mode 1	REC	

NOTE: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.






2.3 DESCRIPTION OF TEST SETUP

CE



RE





2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Smart Phone	BL8800 Pro	N/A	EUT
E-2	Adapter	QA-0300CE03	N/A	Peripherals
			4	
				* 4
L		4	*	7 <u>1</u> , 4.
	7			
		A 2		
		3		

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	YES	NO	1.0m	1
	J. 2				4
	3	4			A 3
		5,		بلہ	
	* 5		L &		
~					A
				*	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.





2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED EMISSION

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Cable	N/A	C01	N/A	Mar. 29, 2021	Mar. 28, 2024	3 years
2	Test Cable	N/A	C02	N/A	Mar. 29, 2021	Mar. 28, 2024	3 years
3	Test Cable	N/A	C03	N/A	Mar. 29, 2021	Mar. 28, 2024	3 years
4	Pulse Limiter	SCHWARZBE CK	VTSD 9561F	9716	Apr. 27, 2021	Apr. 26, 2022	1 year
5	50Ω Switch	ANRITSU CORP	MP59B	620098370 4	Mar. 29, 2021	Mar. 28, 2024	3 year
6	EMI Test Receiver	R&S	ESCI	101160	Apr .27, 2021	Apr .26, 2022	1 year
7	Unversal radio communication tester	R&S	CMU200	1100.008.0	Apr .27, 2021	Apr .26, 2022	1 year
8	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	Apr .27, 2021	Apr .26, 2022	1 year
9	LISN	SCHWARZBE CK	NNLK 8129	8129245	Apr .27, 2021	Apr .26, 2022	1 year
10	LISN	R&S	ENV216	101313	Apr .27, 2021	Apr .26, 2022	1 year

2.5.2 RADIATED TEST SITE

It	tem	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
	1	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
	2	Turn Table	EM	SC100	060531	N/A	N/A	N/A
	3	EMI Test Receiver	R&S	ESCI-7	101318	Apr .27, 2021	Apr .26, 2022	1 year
	4	50Ω Switch	Anritsu Corp	MP59B	620098370 5	Apr .27, 2021	Apr .26, 2022	1 year
	5	Spectrum Analyzer	Aglient	E4407B	MY451080 40	Apr .27, 2021	Apr .26, 2022	1 year
	6	Unversal radio communication tester	R&S	CMU200	1100.008.0	Jul. 01, 2021	Jun. 30, 2022	1 year
	7	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	Jul. 01, 2021	Jun. 30, 2022	1 year
	8	Test Cable	N/A	R-01	N/A	Aug. 07, 2019	Aug. 06, 2022	3 years
	9	Test Cable	N/A	R-02	N/A	Aug. 07, 2019	Aug. 06, 2022	3 years
	10	Bilog Antenna	TESEQ	CBL6111D	31216	Mar. 29, 2021	Mar. 28, 2022	1 year
	11	Horn Antenna	EM	EM-AH-101 80	201107140	Mar. 29, 2021	Mar. 28, 2022	1 year
	12	Amplifier	EMC	EMC05183 5SE	980246	Jul. 01, 2021	Jun. 30, 2022	1 year





2.5.3 HARMONICS AND FILCK

	_							
It	em	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
	1	Harmonic & Flicker	EM TEST	DPPX10	0303-04	Mar. 29, 2021	Mar. 28, 2022	1 year
	2	AC Power Source	EM TEST	ACS500	0203-01	Mar. 29, 2021	Mar. 28, 2022	1 year
	3	Unversal radio communication tester	R&S	CMU200	1100.008.0	Jul. 01, 2021	Jun. 30, 2022	1 year
	4	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	Jul. 01, 2021	Jun. 30, 2022	1 year

2.5.4 ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Unversal radio communication tester	R&S	CMU200	1100.008.0	Jul. 01, 2021	Jun. 30, 2022	1 year
2	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	Jul. 01, 2021	Jun. 30, 2022	1 year
3	Electrostatic Discharge Generator	Lioncel	ESD-203B	ESD203B0 150402	Jul. 01, 2021	Jun. 30, 2022	1 year

2.5.5 RS

ט.ט	110						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Unversal radio communication tester	R&S	CMU200	1100.008.0	Jul. 01, 2021	Jun. 30, 2022	1 year
2	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	Jul. 01, 2021	Jun. 30, 2022	1 year
3	Audio Power Amplifier	Brüel & Kjær	4602B	2185667	Apr .27, 2021	Apr .26, 2022	1 year
4	Mouth Simulator	Brüel & Kjær	2669	2143265	Apr .27, 2021	Apr .26, 2022	1 year
5	Sound Calibrator	Brüel & Kjær	4185	2194825	Apr .27, 2021	Apr .26, 2022	1 year
6	1/2" Pressure- field Microphone	Brüel & Kjær	735	2641678	Apr .27, 2021	Apr .26, 2022	1 year
7	Telephone Test Head	Brüel & Kjær	4185	2631728	Apr .27, 2021	Apr .26, 2022	1 year
8	Audio Analyzer	R&S	UPV	100419	Apr .27, 2021	Apr .26, 2022	1 year





Ear Simulator for 9 Brüel & Kjær 4185 2553612 Apr .27, 2021 Apr .26, 2022 1 year Telephonometr 3142E(Fequ ency range 10 Mar. 29, 2021 Bilog Antenna ETS 00214344 Mar. 28, 2022 1 year 30MHz to 6 GHz) Broadband 11 AR 60S1G6 0350414 Mar. 25, 2021 Mar. 24, 2022 1 year Amplifier **PSG** Analog MY511101 Jul. 01, 2021 12 Signal Agilent E8257D Jun. 30, 2022 1 year 12 Generator NTWPA-00 Jul. 01, 2021 13 Power Amplifier 17063153 Jun. 30, 2022 rflight 1 year 810200 AR 25S1G4A Jul. 01, 2021 Jun. 30, 2022 14 Power Amplifier 308598 1 year MY451025 15 Power Meter Agilent E4419B Jul. 01, 2021 Jun. 30, 2022 1 year 38 MY414956 16 Power Sensor Agilent E9301A Jul. 01, 2021 Jun. 30, 2022 1 year 44 US392121 Jul. 01, 2021 17 Power Sensor E9301A Jun. 30, 2022 1 year Agilent 48

2.5.6 SURGE, EFT/BURST, VOLTAGE INTERRUPTION/DIPS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Surge Generator	EVERFINE	EMS61000- 5A-V1	1101002	Apr .27, 2021	Apr .26, 2022	1 year
2	DIPS Generator	EVERFINE	EMS61000- 11K	1011002	Apr .27, 2021	Apr .26, 2022	1 year
3	EFT/B Generator	EVERFINE	EMS61000- 4A-V2	1012005	Apr .27, 2021	Apr .26, 2022	1 year
4	Unversal radio communication tester	R&S	CMU200	1100.008.0	Jul. 01, 2021	Jun. 30, 2022	1 year
5	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	Jul. 01, 2021	Jun. 30, 2022	1 year





2.5.7 INJECTION CURRENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Attenuator	TESEQ	ATN 6075	38411	N/A	N/A	N/A
2	RF Cable	TESEQ	RF Cable	N/A	N/A	N/A	N/A
3	Signal Generator	R&S	SML03	100954	Nov. 04, 2021	Nov. 03, 2022	1 year
4	Power Amplifier	TESEQ	CBA 230M-080	T44376	Jul. 01, 2021	Jun. 30, 2022	1 year
5	EM Clamp	FCC	F-203I-23M M	504	Nov. 04, 2021	Nov. 03, 2022	1 year
6	Audio Power Amplifier	Brüel & Kjær	4602B	2185667	Nov. 07, 2021	Nov. 06, 2022	1 year
7	Mouth Simulator	Brüel & Kjær	2669	2143265	Nov. 07, 2021	Nov. 06, 2022	1 year
8	Sound Calibrator	Brüel & Kjær	4185	2194825	Nov. 07, 2021	Nov. 06, 2022	1 year
9	1/2" Pressure- field Microphone	Brüel & Kjær	735	2641678	Nov. 07, 2021	Nov. 06, 2022	1 year
10	Audio Analyzer	R&S	UPV	100419	Nov. 07, 2021	Nov. 06, 2022	1 year
11	Ear Simulator for Telephonometr	Brüel & Kjær	4185	2553612	Apr .27, 2021	Apr .26, 2022	1 year
12	Telephone Test Head	Brüel & Kjær	4185	2631728	Apr .27, 2021	Apr .26, 2022	1 year
13	Unversal radio communication tester	R&S	CMU200	1100.008.0	Apr .27, 2021	Apr .26, 2022	1 year
14	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	Apr .27, 2021	Apr .26, 2022	1 year
15	Coupling and Decoupling Network	TESEQ	CDN M016	38722	Apr .27, 2021	Apr .26, 2022	1 year



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION

(Frequency Range 150kHz-30MHz)

Table A.8 - Requirements for conducted emissions from the AC mains power ports of Class A equipment

. / to man	ns power ports (3.1.1)			
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A limits dB(µV)
A8.1	0,15 - 0,5	AMN	Quasi Peak / 9 kHz	79
	0,5 - 30	AIVIN	Quasi Peak / 9 kH2	73
A8.2	0,15 - 0,5	AMN	Average / O kHz	66
	0,5 - 30	AIVIN	Average / 9 kHz	60

Table A.9 - Requirements for conducted emissions from the AC mains power ports of Class B equipment

pplicabl . AC mai	ns power ports (3.1.1)			
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class B limits dB(μV)
A9.1	0,15 - 0,5			66 – 56
	0,5 - 5	AMN	Quasi Peak / 9 kHz	56
	5 – 30			60
A9.2	0,15 - 0,5			56 – 46
	0,5 - 5	AMN	Average / 9 kHz	46
	5 – 30			50

Note:

- The tighter limit applies at the band edges. (1)
- The limit of " * " marked band means the limitation decreases linearly with the (2) logarithm of the frequency in the range.





3.1.2 TELECOMMUNICATION PORT CONDUCTED EMISSION(VOLTAGE LIMITS)

(Frequency Range 150kHz-30MHz)

Table A.10 - Requirements for asymmetric mode conducted emissions from Class A equipment

Applicable to

- 1. wired network ports (3.1.30) 2. optical fibre ports (3.1.24) with metallic shield or tension members 3. antenna ports (3.1.3)

Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A voltage limits dB(μV)	Class A current limits dB(μA)
A10.1	0,15 - 0,5	440	0 :0 1/0111	97 – 87	
	0,5 - 30	AAN	Quasi Peak / 9 kHz	87	
	0,15 - 0,5	444	A	84 – 74	n/a
	0,5 - 30	AAN	Average / 9 kHz	74	
A10.2	0,15 - 0,5	CVP	Quasi Peak / 9 kHz	97 – 87	53 – 43
	0,5 - 30	and current probe	Quasi Peak / 9 KHZ	87	43
	0,15 - 0,5	CVP	10111	84 – 74	40 – 30
	0,5 - 30	and current probe	Average / 9 kHz	74	30
A10.3	0,15 - 0,5	Owner the Deck	O		53 – 43
	0,5 - 30	Current Probe	Quasi Peak / 9 kHz	- fo	43
	0,15 - 0,5	0	A	n/a	40 – 30
	0,5 - 30	Current Probe	Average / 9 kHz		30

The choice of coupling device and measurement procedure is defined in Annex C.

AC mains ports that also have the function of a wired network port shall meet the limits given in Table A.8.

The test shall cover the entire frequency range.

The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability.

Testing is required at only one EUT supply voltage and frequency.

Applicable to ports listed above and intended to connect to cables longer than 3 m.



Table A.12 – Requirements for conducted differential voltage emissions from Class B equipment

Applicable to

- 1. TV broadcast receiver tuner ports (3.1.8) with an accessible connector
- 2. RF modulator output ports (3.1.27)
- 3. FM broadcast receiver tuner ports (3.1.8) with an accessible connector

Table clause	Frequency range MHz	Detector type/ bandwidth		Class B limi dB(μV) 75 Ω		Applicability	
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics		
A12.1	30 – 950		46	46	46	See a)	
	950 – 2 150	For frequencies ≤1 GHz	46	54	54		
A12.2	950 – 2 150		46	54	54	See b)	
A12.3	30 – 300	Quasi Peak/ 120 kHz	46	54	50	See c)	
	300 – 1 000				52		
A12.4	30 – 300	For frequencies	46	66	59	See d)	
	300 – 1 000	≥1 GHz			52		
A12.5	30 – 950	Peak/ 1 MHz	46	76	46	See e)	
950 -	950 – 2 150	1 1411 12		n/a	54		

- a) Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.
- b) Tuner units (not the LNB) for satellite signal reception.
- c) Frequency modulation audio receivers and PC tuner cards.
- d) Frequency modulation car radios.
- e) Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.

Testing is required at only one EUT supply voltage and frequency.

The term 'other' refers to all emissions other than the fundamental and the harmonics of the local oscillator.

The test shall be performed with the device operating at each reception channel.

The test shall cover the entire frequency range.

The following table is the setting of the receiver


The fellowing table is the setting of the receive	OI .
Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.4 TEST SETUP

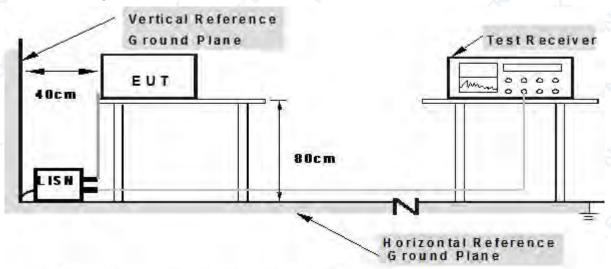

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.2 Unless otherwise a special operating condition is specified in the follows during the testing.




3.1.6 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	23.8℃	Relative Humidity:	52%
Pressure:	1010hPa	Phase:	L
IDEL MULIAND.	DC 5V from Adapter AC 230V/50Hz	Test Mode:	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Domonic
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.2099	32.92	9.63	42.55	63.21	-20.66	QP
0.2099	22.96	9.63	32.59	53.21	-20.62	AVG
0.2540	32.62	9.63	42.25	61.62	-19.37	QP
0.2540	23.37	9.63	33.00	51.62	-18.62	AVG
0.3379	30.67	9.63	40.30	59.25	-18.95	QP
0.3379	23.56	9.63	33.19	49.25	-16.06	AVG
0.4219	28.95	9.64	38.59	57.41	-18.82	QP 🔇
0.4219	21.72	9.64	31.36	47.41	-16.05	AVG
0.7099	30.09	9.74	39.83	56.00	-16.17	QP
0.7099	19.84	9.74	29.58	46.00	-16.42	AVG _<
0.9979	29.30	9.75	39.05	56.00	-16.95	QP
0.9979	20.09	9.75	29.84	46.00	-16.16	AVG

Remark:

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

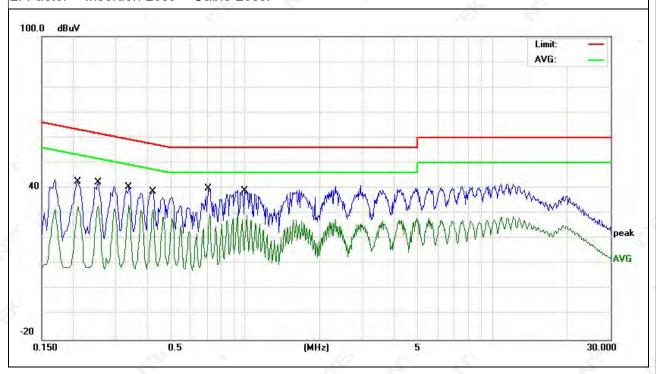




EUT: Smart Phone Model Name: BL8800 Pro 23.8℃ Temperature: Relative Humidity: 52% 1010hPa N Pressure: Phase: DC 5V from Adapter AC Test Voltage: Test Mode: Mode 1 230V/50Hz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Domark
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.3379	31.86	9.68	41.54	59.25	-17.71	QP
0.3379	20.70	9.68	30.38	49.25	-18.87	AVG
0.3820	30.01	9.70	39.71	58.23	-18.52	QP
0.3820	18.24	9.70	27.94	48.23	-20.29	AVG
0.4219	30.18	9.71	39.89	57.41	-17.52	QP
0.4219	19.41	9.71	29.12	47.41	-18.29	AVG
0.4660	28.67	9.73	38.40	56.58	-18.18	QP 🔷
0.4660	17.11	9.73	26.84	46.58	-19.74	AVG
0.7179	26.50	9.65	36.15	56.00	-19.85	QP
0.7179	16.77	9.65	26.42	46.00	-19.58	AVG
0.9220	27.66	9.72	37.38	56.00	-18.62	QP
0.9220	16.29	9.72	26.01	46.00	-19.99	AVG

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

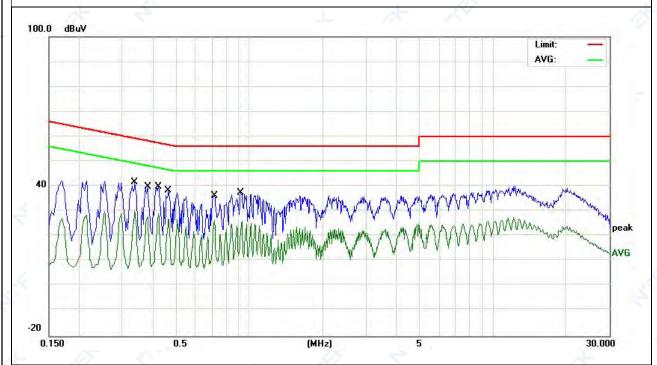

Note: The test modes were carried out for all operation modes. The worst test mode for test data was showed in the report.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

Table A.2 – Requirements for radiated emissions at frequencies up to 1 GHz for Class A equipment

Table clause Frequency range	Frequency range	Measurement		Class A limits $dB(\mu V/m)$
	Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)	
A2.1	30 – 230	10		40
230 – 1 000	230 – 1 000		Quasi Peak /	47
A2.2	30 – 230	•	120 kHz	50
	230 - 1 000	3		57

Apply only A2.1 or A2.2 across the entire frequency range.

Table A.4 – Requirements for radiated emissions at frequencies up to 1 GHz for Class B equipment

Table clause Frequency range MHz	Frequency range	Measurement		Class B limits dB(µV/m)
	Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)	
A4.1	30 – 230	0 - 1 000 Quasi Peak / 120 kHz		30
	230 – 1 000		Quasi Peak /	37
A4.2	30 – 230		120 kHz	40
230 -	230 – 1 000			47

Apply only table clause A4.1 or A4.2 across the entire frequency range.

Table A.6 - Requirements for radiated emissions from FM receivers

Table Frequency range		Me	asurement	Class B limit dB(μV/m)		
clause MHz	MHz	Distance	Detector type/	Fundamental	Harmonics	
		m bandwidth		OATS/SAC (see Table A.1)	OATS/SAC (see Table A.1)	
A6.1	30 – 230	000 10 Quasi peak/ 120 kHz	4.000000000		42	
	230 - 300			50	42	
	300 – 1 000				46	
A6.2	30 – 230			52		
	230 – 300			60	52	
	300 – 1 000				56	

Apply only A.6.1 or A.6.2 across the entire frequency range.

These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the local oscillator. Signals at all other frequencies shall be compliant with the limits given in Table A.4.



3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Table A.3 – Requirements for radiated emissions at frequencies above 1 GHz for Class A equipment

Table clause Frequency range	Frequency range	Measurement		Class A limits $dB(\mu V/m)$
	Distance m	Detector type/ bandwidth		
A3.1	1 000 – 3 000		Average /	56
	3 000 - 6 000		1 MHz	60
A3.2	1 000 – 3 000	3	Peak /	76
3 000 - 6 000	3 000 - 6 000		1 MHz	80

Apply A3.1 and A3.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

Table A.5 – Requirements for radiated emissions at frequencies above 1 GHz for Class B equipment

Table clause Frequency range	Frequency range	Me	asurement	Class B limits $dB(\mu V/m)$		
	MHz	Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)		
A5.1	1 000 – 3 000		Average/	50		
	3 000 – 6 000		1 MHz	54		
A5.2	1 000 – 3 000	3	3		Peak/	70
3 00	3 000 – 6 000		1 MHz	74		

Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

Notes:

- (1) The limit for radiated test was performed according to as following: CISPR 32.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBμV/m)=20log Emission level (uV/m).




3.2.3 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


3.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

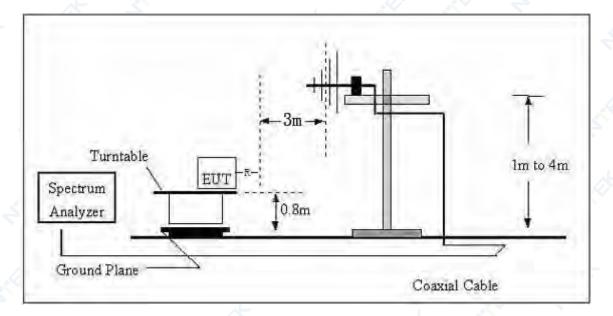



(B) Radiated Emission Test Set-Up Frequency Above 1GHz

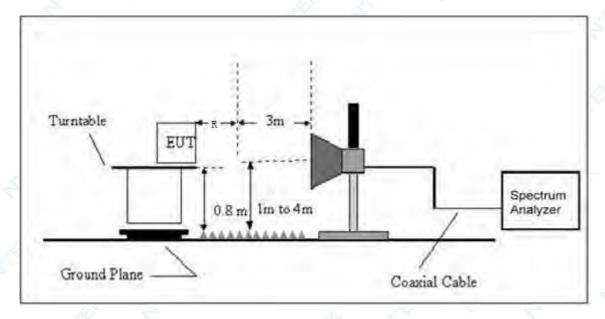

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.2** Unless otherwise a special operating condition is specified in the follows during the testing.




3.2.6 TEST RESULTS (30-1000MHz)

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	25.5℃	Relative Humidity:	53%
Pressure:	1010 hPa	Polarization:	Horizontal
LIEST POWER.	DC 5V from Adapter AC 230V/50Hz	Test Mode:	Mode 1

						ı
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Kemark
30.5304	6.61	24.73	31.34	40.00	-8.66	QP
194.4533	18.78	15.26	34.04	40.00	-5.96	QP
290.0172	19.70	20.15	39.85	47.00	-7.15	QP
714.1734	7.56	28.13	35.69	47.00	-11.31	QP
807.4289	7.66	29.55	37.21	47.00	-9.79	QP
1000.000	6.99	32.34	39.33	47.00	-7.67	QP

Remark[.]

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

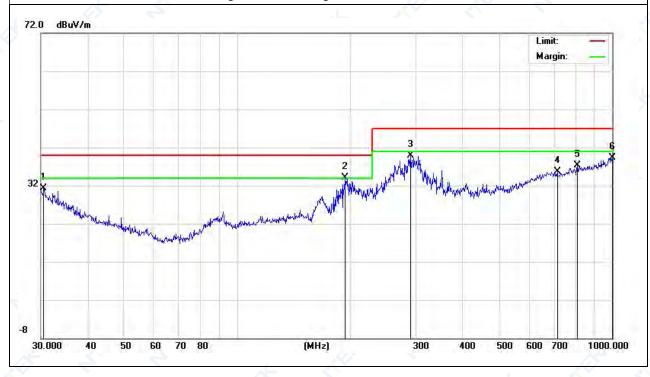






EUT: Smart Phone Model Name: BL8800 Pro Temperature: **25.5℃** Relative Humidity: 53% 1010 hPa Pressure: Polarization: Vertical DC 5V from Adapter AC Mode 1 Test Power: Test Mode: 230V/50Hz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Remark
52.5752	20.99	13.69	34.68	40.00	-5.32	QP
167.8240	17.15	16.50	33.65	40.00	-6.35	QP
196.5098	19.32	15.11	34.43	40.00	-5.57	QP
302.4812	13.21	20.29	33.50	47.00	-13.50	QP
839.1816	8.56	30.00	38.56	47.00	-8.44	QP
986.0715	7.49	31.72	39.21	47.00	-7.79	QP

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

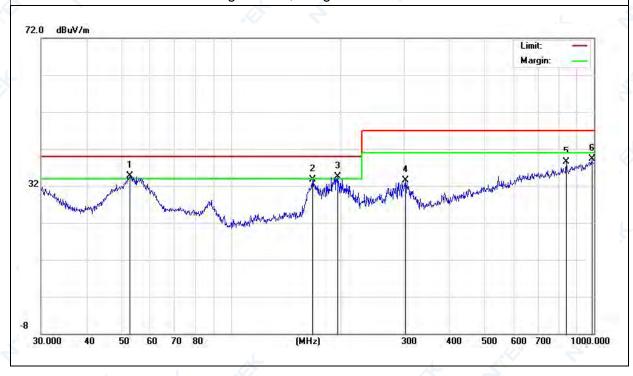

Note: The test modes were carried out for all operation modes. The worst test mode for test data was showed in the report.





3.2.7 TEST RESULTS(1000-6000MHz)

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	25.5℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Mode:	Mode 1
Test Power:	DC 5V from Adapter AC 230V/50Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
V	2675.000	39.75	3.46	43.21	70.00	-26.79	peak
V	2975.000	40.32	4.90	45.22	70.00	-24.78	peak
V	3725.000	39.08	6.09	45.17	74.00	-28.83	peak
V	4225.000	37.59	6.67	44.26	74.00	-29.74	peak
V	4487.500	37.19	6.99	44.18	74.00	-29.82	peak
V	5387.500	35.81	7.69	43.50	74.00	-30.50	peak
Н	1650.000	40.79	0.26	41.05	70.00	-28.95	peak
Н	2325.000	39.86	2.16	42.02	70.00	-27.98	peak
Н	2975.000	39.85	4.90	44.75	70.00	-25.25	peak
Н	4237.500	37.63	6.69	44.32	74.00	-29.68	peak
Н	4800.000	36.77	6.99	43.76	74.00	-30.24	peak
Н	5575.000	35.63	7.86	43.49	74.00	-30.51	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

Note: The test modes were carried out for all operation modes. The worst test mode for test data was showed in the report.





3.3 HARMONICS CURRENT

3.3.1LIMITS OF HARMONICS CURRENT

Table 1 – Limits for Class A equipment

Harmonic order (n)	Maximum permissible harmonic current (A)		
Odd h	armonics		
3	2.3		
5	1.14_		
7	0.77		
9	0.4		
11	0.33		
13	0.21		
15≤n≤39	0.15*(15/n)		
Even h	narmonics		
2	1.08		
4	0.43		
6 🛵 🗳	0.30		
8≤n≤40	0.23*(8/n)		

Note: Reference standard of the table above: EN61000-3-2.





3.3.2 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- b. The classification of EUT is according to section 5 of EN 61000-3-2. The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools. Portable tools.; Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.


Class D: Equipment having a specified power less than or equal to 600W of the following types: Personal computers and personal computer monitors and television receivers.

c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

3.3.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.4 TEST SETUP

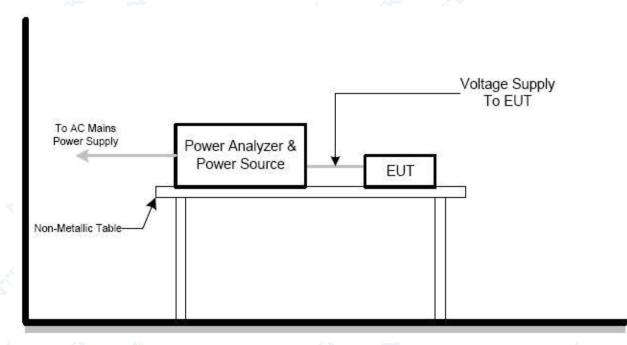





3.3.5 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	22 ℃	Relative Humidity:	53%
Pressure:	1012hPa	Test duration:	150s
Classification:	Class A	Test Power:	N/A
Test Mode:	N/A	7	* 3

Note: The active input power of the EUT is less than 75 W. No limits apply for equipment with an active input power up to and including 75W.



3.4 VOLTAGE FLUCTUATION AND FLICKERS

3.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS

Test items	Limits(EN61000-3-3)	Descriptions
P _{st}	≤1.0, T _p =10min	short-term flicker indicator
P _{lt}	≤0.65, T _p =2h	long-term flicker indicator
d _c	≤3.3%	relative steady-state voltage change
d _{max}	<4%(or 6% _{Note(1)} , 7% _{Note(2)})	maximum relative voltage change:
d _(t)	≤3.3%, more than 500ms	relative voltage change characteristic

Note:

- 1. 6 % for equipment which is:
 - a. switched manually, or
 - b. switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.
- 2. 7 % for equipment which is
 - a. attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or b. switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

3.4.2 TEST PROCEDURE

a. Harmonic Current Test:

Test was performed according to the procedures specified in Sub-clause 6.2 of IEC/EN 61000-3-2 depend on which standard adopted for compliance measurement.

b. Fluctuation and Flickers Test:

Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 6.0/4.0 of IEC/EN 61000-3-3 depend on which standard adopted for compliance measurement.

c. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.


3.4.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.







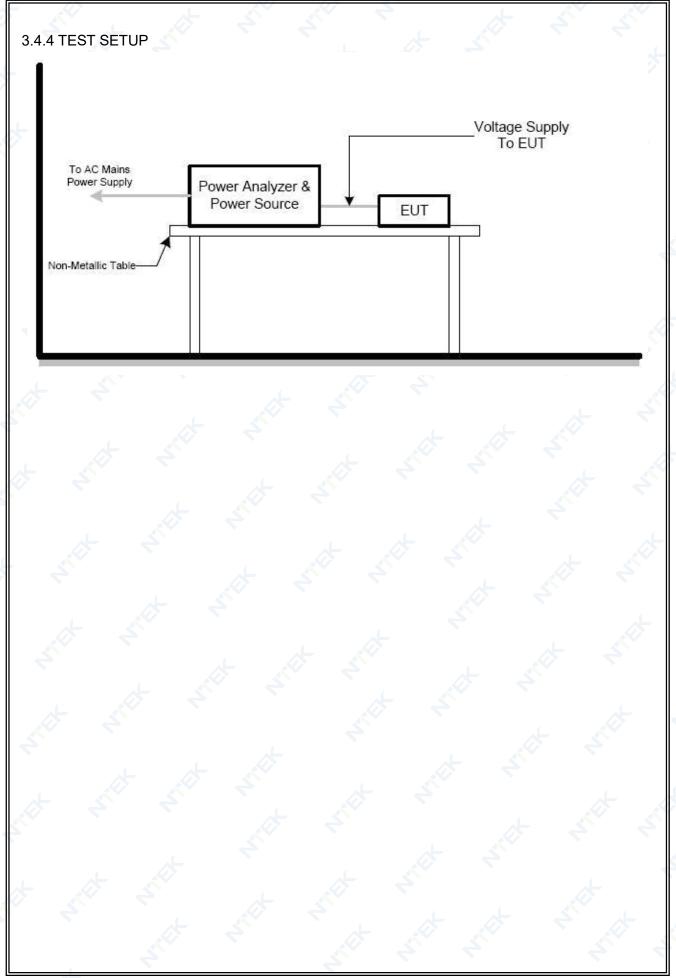





3.4.5 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	22.2℃	Relative Humidity:	52%
Pressure:	1010 hPa	I LECT POWER.	DC 5V from Adapter AC 230V/50Hz
Test Mode:	Mode 1	4	L N

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.069	4.00	PASS
Tmax [s]	0.000	0.50	PASS



4. EMC IMMUNITY TEST

4.1 GENERAL PERFORMANCE CRITERIA

4.1.1 PERFORMANCE CRITERIA

According to EN 55035 standard, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not
	specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

According to EN 301 489-3 standard, the general performance criteria as following:

Criteria	During the test	After the test						
	Operate as intended	Operate as intended						
	No loss of function	No loss of function						
Α	No unintentional responses	No degradation of performance						
		No loss of stored data or user programmable						
		functions						
		Operate as intended						
	May show loss of function	Lost function(s) shall be self-recoverable						
В	May show loss of function	No degradation of performance						
4	No unintentional responses	No loss of stored data or user programmable						
		functions						



According to EN 301 489-17 standard, the general performance criteria as following:

Criteria	During the test	After the test					
	Shall operate as intended (see note 1).	Shall operate as intended.					
	Shall be no loss of function.	Shall be no degradation of performance					
	Shall be no unintentional	(see note 3).					
Α	transmissions	Shall be no loss of function.					
		Shall be no loss of stored data or user					
*	3	programmable functions					
	May show loss of function (one or	Functions shall be self-recoverable.					
	more).	Shall operate as intended after recovering.					
Б	May show degradation of performance	Shall be no degradation of performance					
В	(see note 2).	(see note 3).					
7,7	Shall be no unintentional	Shall be no loss of stored data or user					
	transmissions.	programmable functions.					
		Functions shall be recoverable by the					
↓	3	operator.					
С	May be loss of function (one or more)	Shall operate as intended after recovering.					
	4 5	Shall be no degradation of performance					
	* 3	(see note 3).					

NOTE 1: Operate as intended during the test allows a level of degradation not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 2: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance.

If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 3: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.



According to EN 301 489-19 standard, the general performance criteria as following:

If the EUT is of a non specialized nature or the EUT is combined with an ancillary equipment, the test modulation, test arrangements, etc. as required in clause 4 shall apply.

The EUT, for all immunity tests according to the present document, except the spot frequency test of the immunity test with radiated RF electromagnetic fields (see ETSI EN 301 489-1 [1], clause 9.2), shall be assessed for:

- the storage of messages in the memory of the EUT at the start of the test;
- unintentional responses of the EUT during the test;
- the maintenance of the EUT memory assessed at the conclusion of the test;
- the ability to receive and store messages at the conclusion of the test.

 For the spot frequency test of the immunity test with radiated RF electromagnetic fields (see ETSI EN 301 489-1 [1], clause 9.2) the EUT shall be assessed by monitoring the accuracy of the call received alert signal.

Performance criteria for Continuous phenomena applied to ROMES and ROGNSS receivers (CR)

For the EUT, excluding spot frequency tests as part of the immunity test with radiated RF electromagnetic fields (see ETSI EN 301 489-1 [1], clause 9.2):

- the general performance criteria set out in clause 6.1;
- · during the test no false calls shall occur;
- at the conclusion of the test comprising the series of individual exposures the EUT shall operate as intended with no loss of functions or stored data (messages), as declared by the manufacturer.

For the spot frequency test as part of the immunity test with radiated RF electromagnetic fields (see ETSI EN 301 489-1 [1], clause 9.2) the EUT shall be assessed by monitoring the accuracy of the call received alert signal.

Performance criteria for Transient phenomena applied to ROMES and ROGNSS receivers (TR)

For the EUT:

- the general performance criteria set out in clause 6.1;
- during the test no false calls shall occur;
- at the conclusion of the test comprising the series of individual exposures, the EUT shall operate as intended with no loss of function and/or stored data (messages), as declared by the manufacturer.





Special conditions for EMC immunity tests Table 2: Special conditions for EMC immun

Report No.: STR220218001013E

Reference to clauses in ETSI EN 301 489-1 [1]	Special product-related condition conditions in ETSI EI
9.1 Test configuration; Test methods and levels for immunity tests	The message memory shall be loade EUT shall operate in stand-by mode frequency test as part of the immunit fields (see ETSI EN 301 489-1 [1], cl coupled to the input of the receiver. • for the immunity tests of and pass/fail criteria, an EUT co be used to judge whether the
9.2.2 Test method; Radio frequency electromagnetic field	Spot frequency test: A spot frequency test shall additional 80 MHz; 104 MHz; 136 MHz; 165 MHz;



PERFORMANCE FOR TT

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR TR

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR CT

The performance criteria A shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an Acknowledgement (ACK) or Not Acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR CR

The performance criteria A shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

According to EN 301 489-52 standard, the general performance criteria as following:

GSM and DCS Performance Criteria

Please refer to the standard ETSI EN 301 489-52 V1.2.1 clause 6.1.

CDMA Direct Spread (UTRA and E-UTRA) Performance Criteria

Please refer to the standard ETSI EN 301 489-52 V1.2.1 clause 6.2.

4.2 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **2.2** Unless otherwise a special operating condition is specified in the follows during the testing.



4.3 ESD TESTING

4.3.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Required Performance	B AT AT T
Discharge Voltage:	Air Discharge: 2kV/4kV/8kV
	Contact Discharge: 2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point
	Contact Discharge: min. 200 times in total
Discharge Mode:	A/C Discharge
Discharge Period:	1 second minimum

4.3.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

a. Indirect application of the discharge:

Vertical Coupling Plane (VCP):

At least 10 single discharges (in the most sensitive polarity) shall be applied to the centre of one vertical edge of the coupling plane. The coupling plane, of dimensions $0.5 \, \mathrm{m} \times 0.5 \, \mathrm{m}$, is placed parallel to, and positioned at a distance of $0.1 \, \mathrm{m}$ from, the EUT.

Discharges shall be applied to the coupling plane, with sufficient different positions such that the four faces of the EUT are completely illuminated. One VCP position is considered to illuminate $0.5 \, \mathrm{m} \, \times \, 0.5 \, \mathrm{m}$ area of the EUT surface.

Horizontal Coupling Plane (HCP):

Discharge to the HCP shall be made horizontally to the edge of the HCP.

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the centre point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

The discharge electrode shall be in contact with the edge of the HCP before the discharge switch is operated


b. Direct application of discharges to the EUT

The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.



NTEK 北测

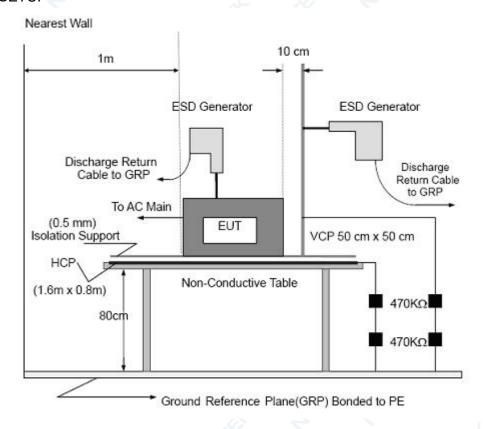

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.





4.3.4 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	22 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	LIAST POWAY.	DC 5V from Adapter AC 230V/50Hz / DC 5V from PC
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11	4	* **

Mode	Contact D	isch	arg	e (Ir	ndire					
Test level(kV)	Test Point	2	2		4		3	Criterion	Result	
Test Location	163t i Ollit	+	•	+	•	+	-			
4 38	Front	Р	Р	Р	Р			7, 4		
НСР	Rear	Р	Р	Р	Р					
TICE	Left	Р	Р	Р	Р			4 4		
	Right	Р	Р	Р	Р			В	Complies	
- 3	Front	Р	Р	Р	Р			В	Compiles	
VCP	Rear	Р	Ρ	Р	Ω				*	
VCP	Left	Р	Р	Р	Р			* *		
	Right	Р	Р	Ρ	Ρ				1	





TEST RESULT

Mode 4/5/6/7/8/9/10/11

	Mode		A	ir [Dis	cha	arg	е		(Cor	nta	ct C	Disc	cha	rge	Э	BT / WIFI / GSM /			
	Test level(kV)	2	2	4	l	8	}	1	5	2	2	4	1	6	3	8	3	WCDMA / LTE/	GPS Obser	Crite	Result
	Test Location	+	- 1	+		+		+	-	+	- 1	+	7	+	-	+	-	NFC /NR Observati on	vation	rion	
	A1	Р	Р	Р	Р	Р	Р														
	A2	Р	Р	Р	Р	Р	Р							,		Ä		7			
	A3	Р	Р	Р	Р	Р	Р				4							4	,		7,
	A4	Р	Р	Р	Р	Р	Р														•
	A5	Р	Р	Р	Р	Р	Р					*						TTTD	тр	В	Complies
5	C1							F		Р	Р	Р	Р					TT,TR	TR	Ь	Complies
	C2		¥							Р	Р	Р	Р								, 4
	C3									Р	Р	Р	Р					4			á
	C4	•					4			Р	Р	Р	Р								t K
	C5	1								P	Р	Р	Ρ					*			7






Mode 1/2/3

Mode	Air Discharge									Cor	nta	ct C	Disc	cha	ırge)		
Test level(kV)	2	2	4	L	8	3	15		2		4	4		6		3	Crite rion	Result
Test Location	+	•	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
A1	Ρ	Р	Р	Р	Р	Р												*
A2	Р	Р	Р	Р	Р	Р	4										*	
A3	Р	Р	Р	Р	Р	Р												
A4	Р	Р	Р	Ρ	Р	Р												1
A5	Р	Р	Р	Р	Р	Р												Complies
A6	Р	Р	Р	Ρ	Р	Р											В	Complies
A7	Р	Р	Р	Р	Р	Р	.C					•						ے د
A8	Р	Р	Р	Р	Р	Ρ												
A9	Р	Р	Р	Р	Р	Р					٨							, 4,
A10	Р	Р	Р	Р	Р	Р	F											

Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 3) There was not any unintentional transmission in standby mode.





4.3.5 PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

Photo 1


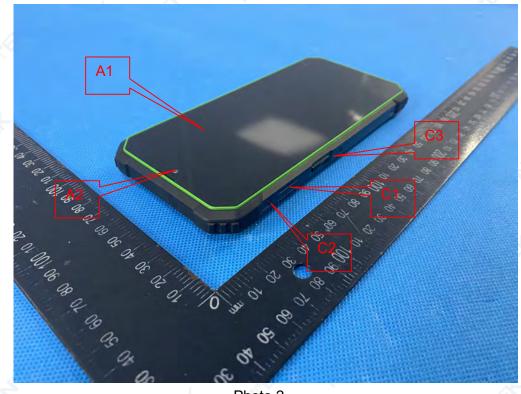


Photo 2



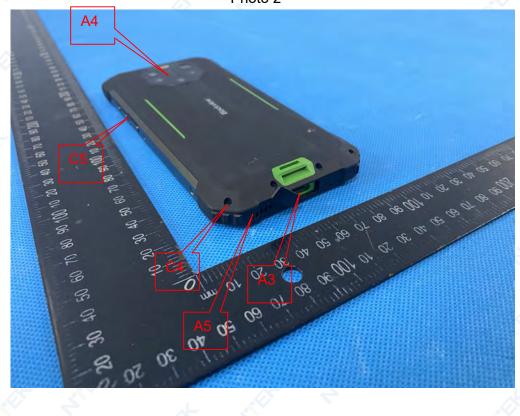

4.4 RS TESTING

4.4.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-3
Required Performance	Α
Frequency Range:	According to EN 301 489-1:
	80 MHz - 6000 MHz ;
	According to EN 55035:
	80 MHz to 1000 MHz
	1800 MHz
	2600 MHz
	3500 MHz
	5000 MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	at least 3 seconds

4.4.2 TEST PROCEDURE

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.


The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:


- a. The field strength level was 3V/m.
- b. The frequency range is swept from 80 MHz to 6000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000 MHz with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5 x 10⁻³ decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. Sweep Frequency 900 MHz, with the Duty Cycle:1/8 and Modulation: Pulse 217 Hz(if applicable)
- d. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.



4.4.3 TEST SETUP

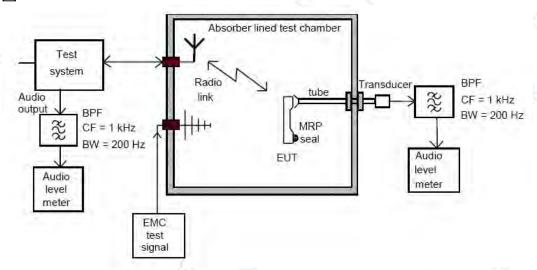

⊠ General Communication

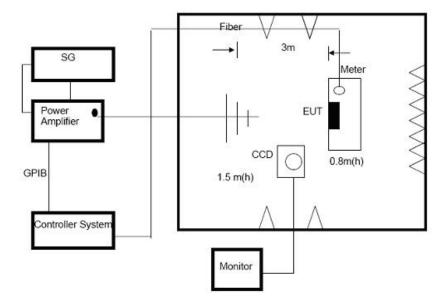

Note:

For the actual test configuration, please refer to the related Item –EUT Test Photos.

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.





4.4.4 TEST RESULTS

		<u> </u>	
EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	23℃	Relative Humidity:	57%
Pressure:	1010 hPa		DC 5V from Adapter AC 230V/50Hz / DC 5V from PC
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11	4.	4

TEST RESULT

LTE FDD B1 / B3 / B7 / B8 / B20/ B28/ B40/ NR FDD n1/ n3/ n8/ n20/ n28/ NR TDD n38/ n77 / n78/ EN-DC: DC 1A n78A Link

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Results
80~1000 1000-6000	H/V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front Rear Left Right	CT,CR	STIP &

Note:

1. The exclusion band has not been tested in 80MHz~6GHz.

For channelized equipment the exclusion band shall be calculated by using the following formulae:

For the lower edge for the exclusion band:

EXband(lower) = BandRX(lower) - nChWRX

and for the upper edge of the exclusion band:

EXband(upper) = BandRX(upper) + nChWRX

Where n = number of channel widths required for exclusion band.

2. In the data transfer mode, the performance criteria shall be that the throughput shall be \geqslant 95 % of the maximum throughput of the reference measurement channel





GSM 900 / 1800 / WCDMA 2100 / 900 Uplink and Downlink

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Perform. Criteria	Results
80~1000 1000-6000	H/V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front Rear Left Right	CT,CR	A	P

Note:

1. The exclusion band has not been tested in 80MHz~6GHz.

For channelized equipment the exclusion band shall be calculated by using the following formulae:

For the lower edge for the exclusion band:

EXband(lower) = BandRX(lower) - nChWRX

and for the upper edge of the exclusion band:

EXband(upper) = BandRX(upper) + nChWRX

Where n = number of channel widths required for exclusion band.

2: "A" stand for: the uplink/downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check). The RXQUAL of the downlink is not exceeding the value of three, measured during each individual exposure in the test sequence. Or During and after the test, the apparatus continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level.





GPRS / EGPRS / HSDPA / HSUPA Uplink and Downlink

_	Frequency	RF Field	R.F.	Azimuth	Observation	Perform.	Results	
	Range (MHz)	Position	Field Strength	Azimum	Observation	Criteria		
	ه لم		2 \//m (rma)	Front				
	80~1000		3 V/m (rms) AM Modulated	Rear	CT,CR	^		
	1000-6000	H/V		Left	CI,CK	A	P	
		<i>*</i>	1000Hz, 80%	Right				

Note:

1. The exclusion band has not been tested in 80MHz~6GHz.

For channelized equipment the exclusion band shall be calculated by using the following formulae:

For the lower edge for the exclusion band:

EXband(lower) = BandRX(lower) - nChWRX

and for the upper edge of the exclusion band:

EXband(upper) = BandRX(upper) + nChWRX

Where n = number of channel widths required for exclusion band.

- 2. During the test, the Maximum Bit Error Ratio was less than 1×10⁻³.
- 3. During the test, the Maximum Block Error Ratio was less than 1×10⁻².

BT / WIFI / NFC link

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Perform. Criteria	Results
Range (MHZ)	Position	Fleid Strength	Front	Δ, ,	.dt .4	
		3 V/m (rms)	TTOTIL			
80~1000	H/V	AM Modulated	Rear	CT,CR		Р
1000-6000	П/V	1000Hz, 80%	Left	CI,CK	Α	
		1000112, 0070	Right	,	//	+ 4

Note:

1. The exclusion band has not been tested in 80MHz~6GHz.

The exclusion band for immunity testing of equipment operating in the 2,4 GHz band shall be: • lower limit of exclusion band = lowest allocated band edge frequency -120 MHz, i.e. 2 280 MHz; • upper limit of exclusion band = highest allocated band edge frequency +120 MHz, i.e. 2 603,5MHz.

2. "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.



GPS Receiver Mode Link

Frequency Range	RF Field	R.F.	Azimuth	Observation	Perform.	Results	
(MHz)	Position	Field Strength			Criteria		
.L .L +			Front				
80~1000	ши	3 V/m (rms) AM Modulated 1000Hz, 80%	Rear	CR	A		
1000-6000	H/V		Left	CR		P	
4		,	Right		4		
80,104,136,			Front	4			
165,200,260,	4	3 V/m (rms)	Rear	*	A		
330,430,560,	H/V	Unmodulated	106	CR		Р	
715 MHz ± 1,		200Hz, 100%	Left				
920 MHz ± 1			Right		A 1	_	

Note: "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

REC / Data Transmission / FM Mode

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform. Criteria	Results
80~1000 1000~6000			Front		+ 3
1800	ни	3 V/m (rms) AM Modulated	Rear	St . 450	Р
2600 3500	H/V	1000Hz, 80%	Left	A	
5000			Right		4

Note: "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

There was not any unintentional transmission in standby mode.



4.5 EFT/BURST TESTING

4.5.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-4
Required Performance	B A A A
Test Voltage:	Power Line: 1 kV
	DC/Signal/ wired network Line: 0.5 KV
Polarity:	Positive & Negative
Impulse Frequency:	For xDSL wired network ports: 100 kHz
	For DC/AC ports: 5 kHz
Impulse Wave shape :	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.


4.5.2 TEST PROCEDURE


The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- b. Both positive and negative polarity discharges were applied.
- c. The duration time of each test sequential was 1 minute
- d. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.5.3 TEST SETUP

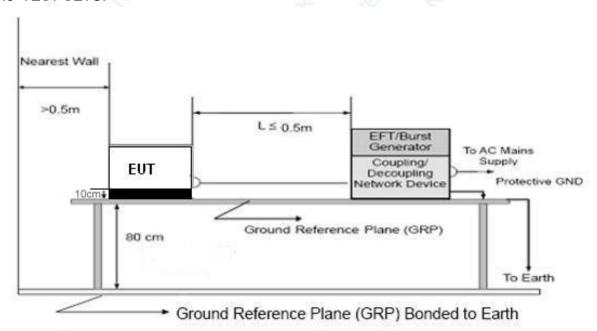

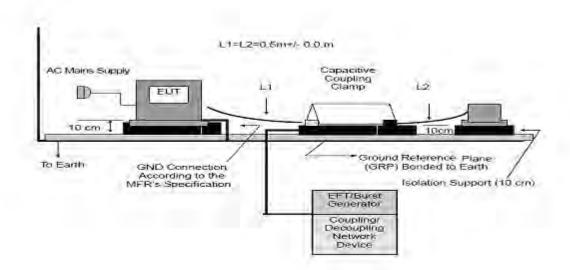

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.





4.5.4 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	22 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Hest Power.	DC 5V from Adapter AC 230V/50Hz
Test Mode:	Mode 1/2/4/5/6/7/8/9/10/11	4.	4 ~

TEST RESULT

Mode 4/5/6/7/8/9/10/11

				Tes	t lev	el (k	(V)			BT / WIFI / GSM /	GPS		
Cou	pling Line	0	.5		1	2	2	4	1	WCDMA /	Observ	Criteri on	Result
		+	-	+	-	+	-	+	-	LTE/ NFC /NR Observation	ation		
	L	Р	Р	Р	Р								Complies
	N	Р	Р	Р	Р		•						Complies
本	PE						.L						_
AC line	L+N	Р	Р	Р	Р				5		4		Complies
	L+PE									TT,TR	TR	В	
<u>.</u>	N+PE		4							* 7.	4		
	L+N+PE												2 4
D	C Line								¥		٠.	4	
Sig	nal Line	5							٦	. *			<i>*</i>





Mode 1/2

				Te	est le	/el (k\	/)					
Couplii	ng Line	0.5		1		2		4		Criterion	Result	
		+	-	+	-	+	-	+	-			
- 2	L	Р	Р	Р	Р						Complies	
	N	Р	Р	Р	Р						Complies	
با	PE									5		
AC line	L+N	Р	Р	Р	Р						Complies	
7	L+PE	4								В		
4	N+PE						٦,				¥	
	L+N+PE				4							
DC	Line										* *	
Signal Line							d		*	4	7, 4	

Note:

- 1)There was not any unintentional transmission in standby mode
- 2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 3) There was not any unintentional transmission in standby mode.



4.6 SURGE TESTING


4.6.1 TEST SPECIFICATION


Basic Standard:	IEC/EN 61000-4-5
Required Performance	B & S
Wave-Shape:	Combination Wave
	1.2 / 50 us Open Circuit Voltage
	8 / 20 us Short Circuit Current
Test Voltage:	Power Line:0.5 kV, 1 kV, 2 kV
Surge Input / Output:	L-N, L-PE, N-PE
Generator Source:	2 ohm between networks
Impedance:	12 ohm between network and ground
Polarity:	Positive / Negative
Phase Angle:	0 / 90 / 180 / 270
Pulse Repetition Rate:	1 time / min. (maximum)
Number of Tests:	5 positive and 5 negative at selected points

4.6.2 TEST PROCEDURE

- a. For EUT power supply:
 - The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).
- b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT: The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT:
 - The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.



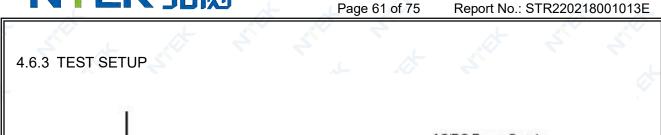

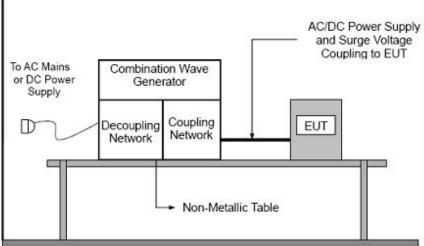





4.6.4 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	22℃	Relative Humidity:	53%
Pressure:	1010 hPa	Hest Power.	DC 5V from Adapter AC 230V/50Hz
Test Mode:	Mode 1/2/4/5/6/7/8/9/10/11	4.	A- <

TEST RESULT

Mode 4/5/6/7/8/9/10/11

					Τe	est le	evel				BT / WIFI / GSM /			
0.0			0.5	kV	11	۲V	2k	V	4k	V	WCDMA /	GPS	Ouit a ui a u	Daault
Co	oupling L	ine	+	-	+	-	+	-	+	1	LTE / NFC/NR Observati on	Observati on	Criterion	Result
		0°	Р	Р	Р	Р					* <		, 4	
	L-N	90°	Р	Р	Р	Р					(1)			Complies
	L-IN	180°	Р	Р	Р	Р						,		Compiles
		270°	Р	Р	Р	Р								
+							4					4	Ť	7
AC line	L-PE										TT,TR	TR	В	
										F		7/02	.1.	
						4					4,			4
	N-PE												4	
											<i>A</i>	4		
	DC Line	<u> </u>				v	~					*		
S	ignal Li	ne									*	3		4





Mode 1/2

						Test	level					
Co	oupling Line)	0.5	kV	1	kV	2	kV	4	kV	Criterion	Result
			+	-	+	-	+	-	+	-		
	4	0°	Р	Р	Р	Р			•			*
	L-N	90°	Р	Р	Р	Р						Complies
	L-IV	180°	Р	Р	Р	Р				*		Compiles
		270°	Р	Р	Р	Р						ے.
4									, in the second		ے ا	
AC line	L-PE									*	В	4
*											4	
		4									\\	4
									1			
,	N-PE						+				7	
* <		7				*						
		<u>_</u>										<i>→ →</i>
	DC Line									4		
S	Signal Line											

Note:

- 1) There was not any unintentional transmission in standby mode
- 2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 3) There was not any unintentional transmission in standby mode.



4.7 INJECTION CURRENT TESTING

4.7.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-6
Required Performance	A & S
Frequency Range:	0.15 MHz - 80 MHz
Field Strength:	3 Vr.m.s.
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Dwell Time:	at least 3 seconds


4.7.2 TEST PROCEDURE


The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:


- a. The field strength level was 3V.
- b. The frequency range is swept from 150 KHz to 80 MHz, with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5 x 10⁻³ decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.7.3 TEST SETUP

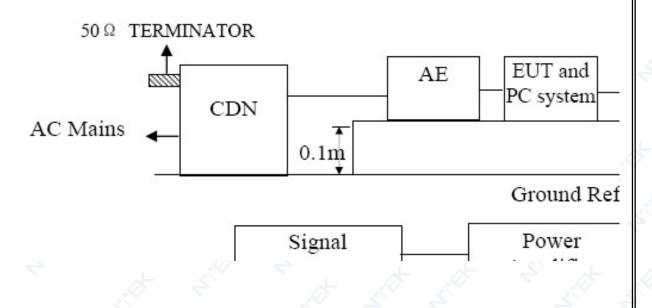






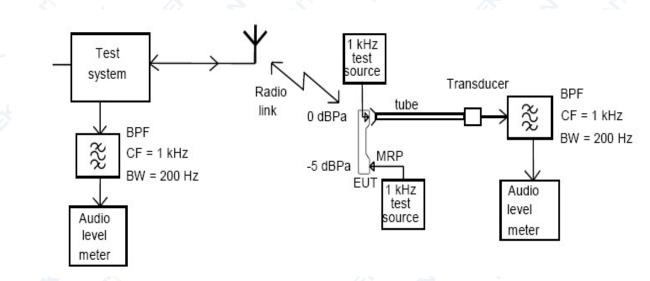

⊠ General Communication

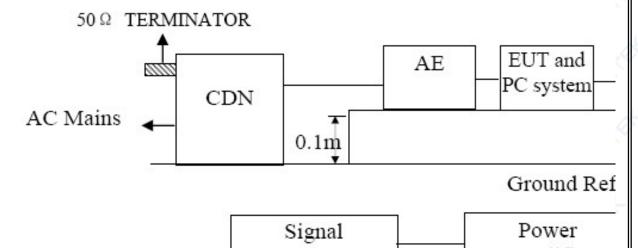

For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.



4.7.4 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	22℃	Relative Humidity:	53%
Pressure:	1010 hPa	LIAST POWAR.	DC 5V from Adapter AC 230V/50Hz
Test Mode:	Mode1/2/4/5/6/7/8/9/10/11	4	↓

TEST RESULT

LTE FDD B1 / B3 / B7 / B8 / B28/ B20 / B40/ NR FDD n1/ n3/ n8/ n20/ n28/ NR TDD n38/ n77 / n78/ EN-DC: DC 1A n78A Link Link

Test Ports (Mode)	Freq. Range (MHz)	Field Strength	Observation	Results
Input / Output AC. Power Port	0.1580	3V(rms)	CT, CR	A
Input / Output DC. Power Port	0.15 80	AM Modulated 1000Hz, 80%	N/A	N/A
Signal Line	0.15 80		N/A	N/A

Note: In the data transfer mode, the performance criteria shall be that the throughput shall be \$\infty\$ 95 % of the maximum throughput of the reference measurement channel

GSM 900 / 1800 / WCDMA 2100 / 900 Uplink and Downlink

Test Ports (Mode)	Freq. Range (MHz)	Field Strength	Observation	Perform. Criteria	Results
Input / Output AC. Power Port	0.1580	3V(rms)	CT, CR	Α	Р
Input / Output DC. Power Port	0.15 80	AM Modulated	N/A	N/A	N/A
Signal Line	0.15 80		N/A	N/A	N/A

EUT is used for this calibration, the output of the audio source was adjusted to achieve a reference Level equivalent to a SPL of –5 dB Pa at 1 kHz at the Mouth Reference Point (MRP), the reading of the audio level meter, which was connected to the output of the communication tester, was recorded as a reference level. During the test, the uplink speech output level was monitored, it was confirmed to be at least 35 dB less than the previously- recorded reference level.



Page 67 of 75 Report No.: STR220218001013E

GPRS / EGPRS / HSDPA / HSUPA Uplink and Downlink

Test Por (Mode		Freq. Range (MHz)	Field Strength	Observation	Perform. Criteria	Results
Input / Ou AC. Power	•	0.1580	3V(rms)	CT, CR	Α	Р
Input / Ou DC. Power	•	0.15 80	AM Modulated 1000Hz, 80%	N/A	N/A	N/A
Signal Li	ne	0.15 80		N/A	N/A	N/A

Note: During the test, the Maximum Bit Error Ratio was less than 1×10⁻³. During the test, the Maximum Block Error Ratio was less than 1×10⁻²

BT / WIFI / NFC link

Test Ports (Mode)	Freq. Range (MHz)	Field Strength	Observation	Perform. Criteria	Results
Input / Output AC. Power Port	0.1580	3V(rms)	CT, CR	A	Р
Input / Output DC. Power Port	0.15 80	AM Modulated 1000Hz, 80%	N/A	N/A	N/A
Signal Line	0.15 80	4	N/A	N/A	N/A

Note: "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

GPS Receiver Mode Link

Test Ports (Mode)	Freq. Range (MHz)	Field Strength	Perform. Criteria	Results	
Input / Output	0.15 80		A	Р	
AC. Power Port		3V(rms)		.1	
Input / Output	0.15 80	AM Modulated	N/A	N/A	
DC. Power Port	0.13 60	1000Hz, 80%	IN/A	IV/A	
Signal Line	0.15 80	,	N/A	N/A	

Note: "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.





REC Mode / FM

Test Ports (Mode)	Freq. Range (MHz)	Field Strength	Perform. Criteria	Results
Input / Output AC. Power Port	0.1580	3V(rms)	Α	Р
Input / Output DC. Power Port	0.15 80	AM Modulated 1000Hz, 80%	N/A	N/A
Signal Line	0.15 80	1000112, 0070	N/A	N/A

Note: "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

Note:

- 1)There was not any unintentional transmission in standby mode
- 2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 3) There was not any unintentional transmission in standby mode.



4.8 VOLTAGE INTERRUPTION/DIPS TESTING


4.8.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-11
Required Performance	100% reduction, 0.5 Cycle
	100% reduction, 1.0 Cycle
	30% reduction, 25 Cycles
	30% reduction, 0.5 Cycle
Voltage Interruptions:	100% reduction, 250 Cycles
Test Duration Time:	Minimum three test events in sequence
Interval between Event:	Minimum ten seconds
Phase Angle:	0°/45°/90°/135°/180°/225°/270°/315°/360°
Test Cycle:	3 times

4.8.2 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.8.3 TEST SETUP

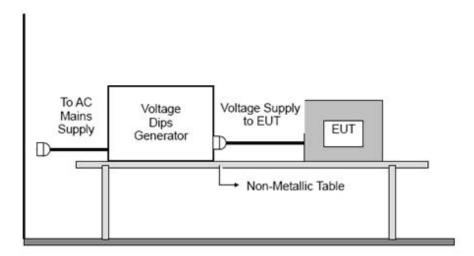

For the actual test configuration, please refer to the related Item –EUT Test Photos.





4.8.4 TEST RESULTS

EUT:	Smart Phone	Model Name:	BL8800 Pro
Temperature:	22 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	DC 5V from Adapter AC 230V/50Hz
Test Mode:	Mode 1/2/4/5/6/7/8/9/10/11	4.	A- 48

TEST RESULT

Mode 4/5/6/7/8/9/10/11

Voltage Reduction	Duration (ms)	BT / WIFI / GSM / WCDMA / LTE/ NFC /NR / Observation	GPS Observation	Perform Criteria	Results
Voltage dip: 0%	10	TT, TR	TR	В	P
Voltage dip: 0%	20	TT, TR	TR	В	Р
Voltage dip: 70%	10	TT, TR	TR	C	P P
Voltage dip: 70%	500	TT, TR	TR	C C	Р
Voltage interruptions: 0%	5000	TT, TR	TR T	С	⊢ P ≤

Mode 1/2


mode i/E				
Voltage	Duration	ration Perform		
Reduction	(ms)	Criteria	Results	
Voltage dip: 0%	10	В	Р	
Voltage dip: 0%	20	В	P	
Voltage dip: 70%	10	С	P P	
Voltage dip: 70%	500	c	Р	
Voltage interruptions: 0%	5000	€ c	P	

Note:


- 1) There was not any unintentional transmission in standby mode
- 2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 3) There was not any unintentional transmission in standby mode.



5. EUT TEST PHOTO







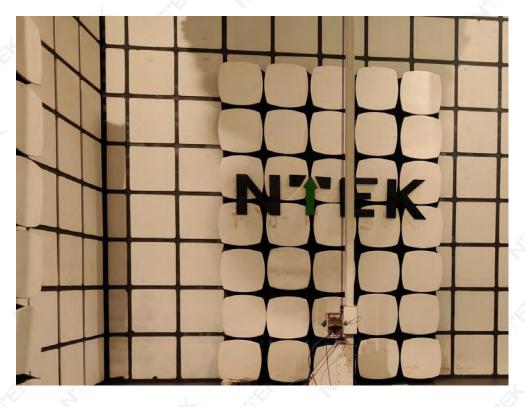








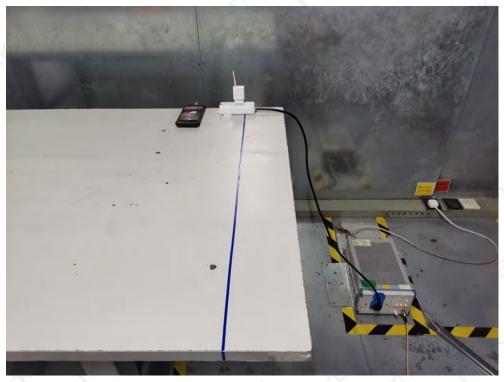

Flick Measurement Photo

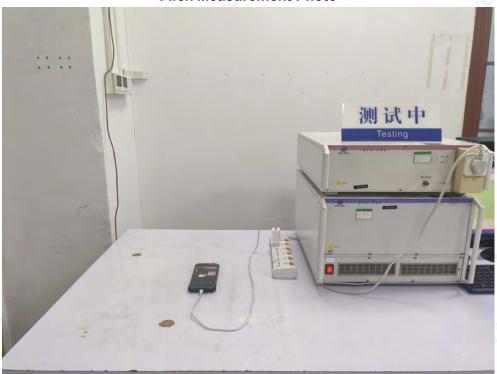







NTEK 北测[®]




RS Measurement Photo











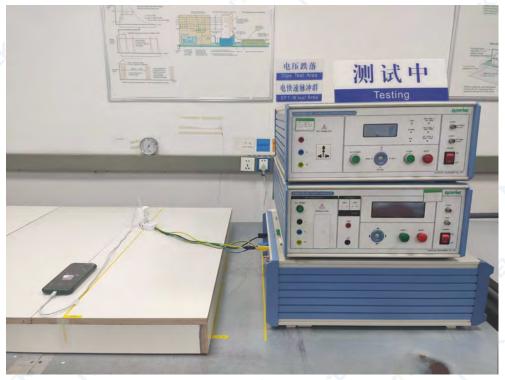


SURGE Measurement Photo

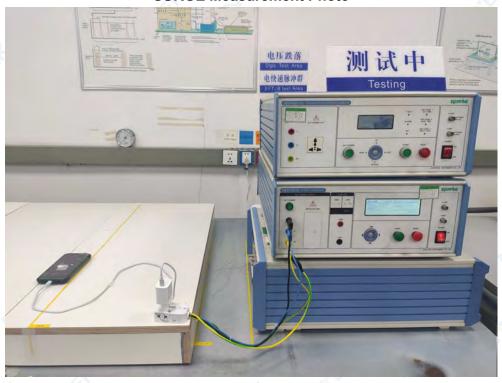







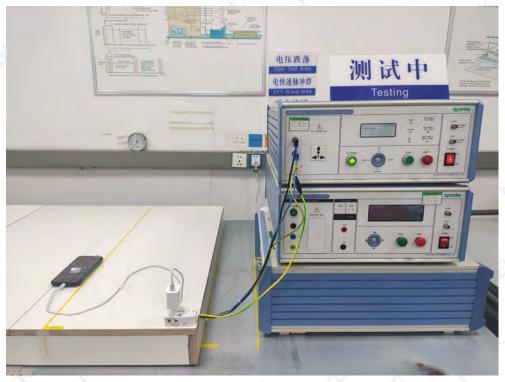

CS Measurement Photo



END OF REPORT